PRODUCT NO.	RoHS compliant
DSIC04TSGET	

REV.	ECN NO.	DR	DATE

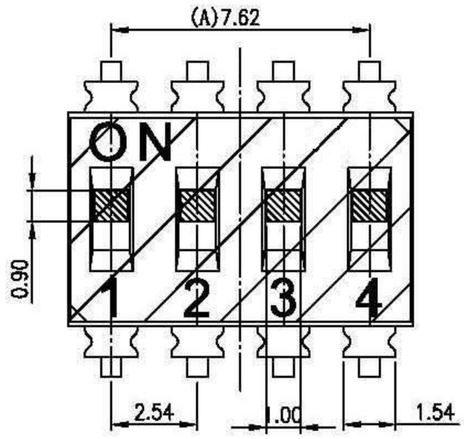

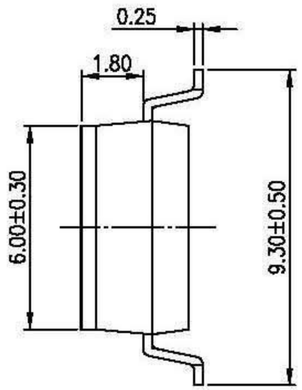

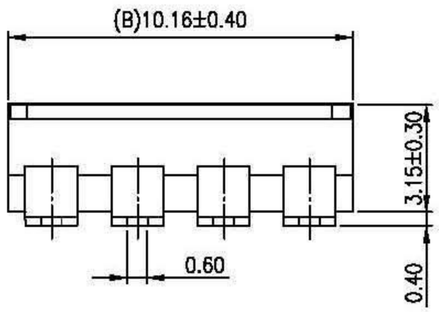

[Schematic]



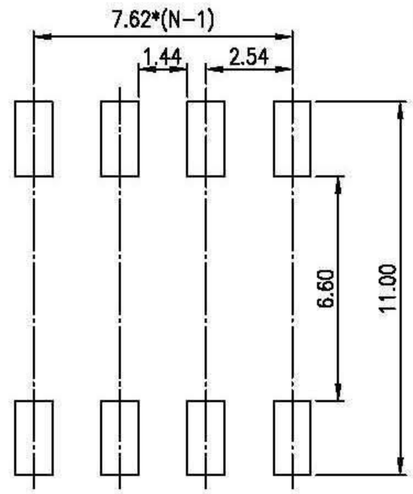

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

[推钮行程]



(Constructlon)

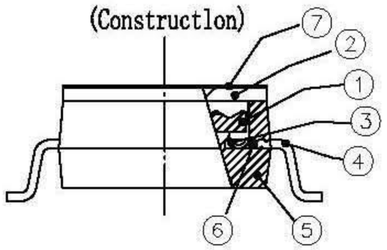

NOTES :

1.Specification:

1>.Operating force: 1000gf Max
2>.Operating Temperature: −30° to+85°
3>.Storage Temperature: : −40° to+85°
4>.Mechanical Life: 3000cycles minimum

2. PLATING:
GOLD FLASH 1u"(min.) SOLDERTAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX T S G E T

- [包装方式：T=管装 R=Reel]
- [电镀层：E=接触部3u" G=接触部3u" /焊接部1~2u"]
- [G=渡全金 S=内金外锡]
- [脚型：S脚 / J脚 / H脚 / A脚 / Z脚]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品P数：02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 V0	0.05mm

DIMENSIONS			DIMENSIONS		
POS.	(A)	(B)	POS.	(A)	(B)
2P	2.54	5.08	1P	/	2.54
4P	7.62	10.16	3P	5.08	7.62
6P	12.70	15.24	5P	10.16	12.70
8P	17.78	20.32	7P	15.24	17.78
10P	22.86	25.40	9P	20.32	22.86
12P	27.94	30.48	11P	25.40	27.94

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ± 0.25	0. ± 2°
.00 ± 0.15	.0 ± 1°
.000± 0.10	.00± 0.5°
DESIGN	LU ER XIN
DRAWING	
CHECK	
APPRO.	

INSPECTION COPY

PROJECTION

2012/04/12

广州市求索电子有限公司
GuangZhou QiuSuo Eletronic Co.;Ltd

TITLE
BY DSIC SERIES PITCH 2.54mm

PRODUCT FAMILY DSIC SERIES

PRAT NO. DSIC04TSGET

FILE NO. DSIC04TSGET−A

SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A