

超小型鈕子開關 SUB-MINIATURE TOGGLE SWITCH



型号说明 Ordering Information




技术特性 Specification

- 规格 Rating: 3A 125VAC; 1.5A250VAC
- 接触电阻 Contact Resistance: 20m Ω max
- 绝缘电阻 Insulation Resistance: 500VDC 1000M Ω min
- 耐电压 Dielectric Strength: 1000VAC, 1Minute
- 操作温度 Operating Temperature: -25°C~+85°C
- 电气寿命 Electrical Life: 10,000 Cycles


电路特性 Circuitry trait

01	ON	-	OFF
02	ON	-	ON
03	ON	OFF	ON


手柄种类 Handle Options

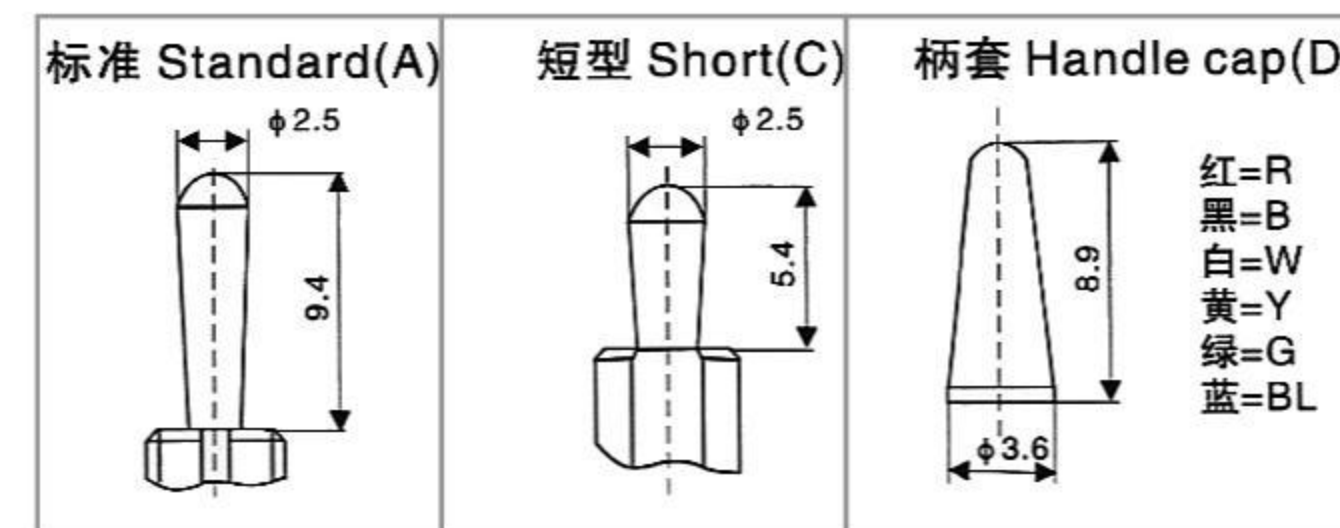





铭牌 Nameplate

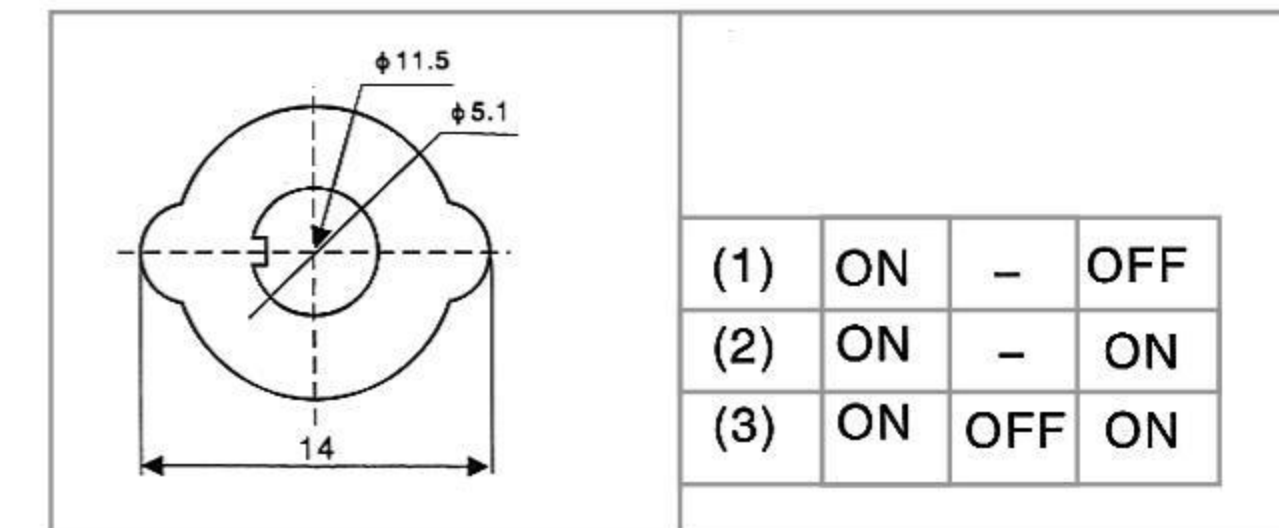

轴套种类 Bushing options

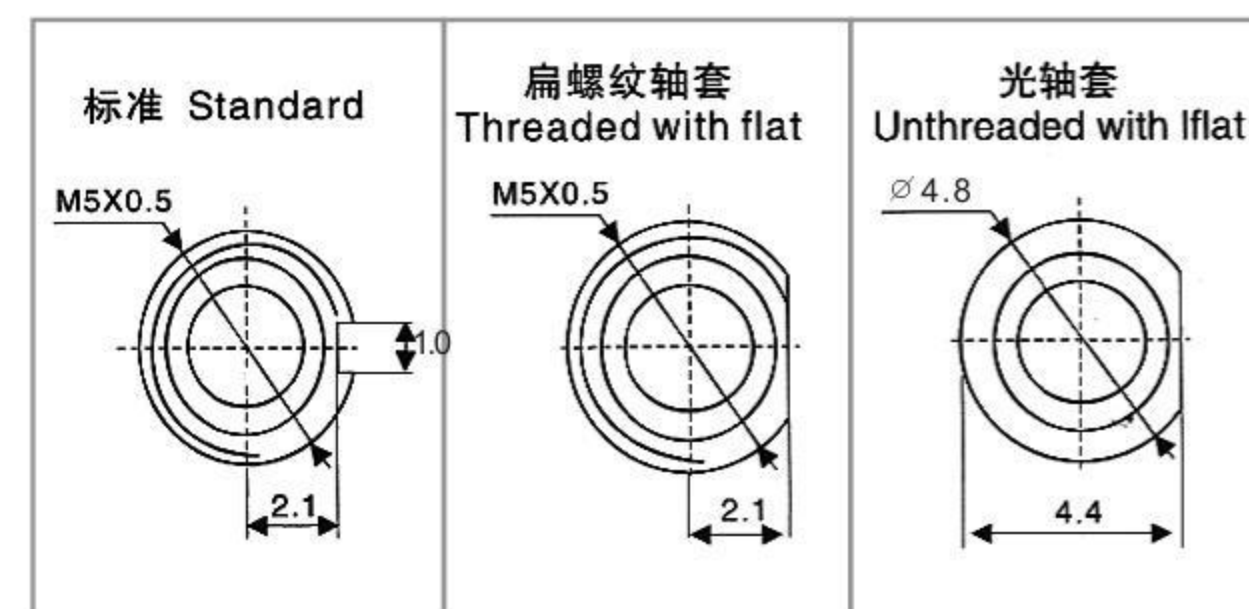


端子种类 Terminal options

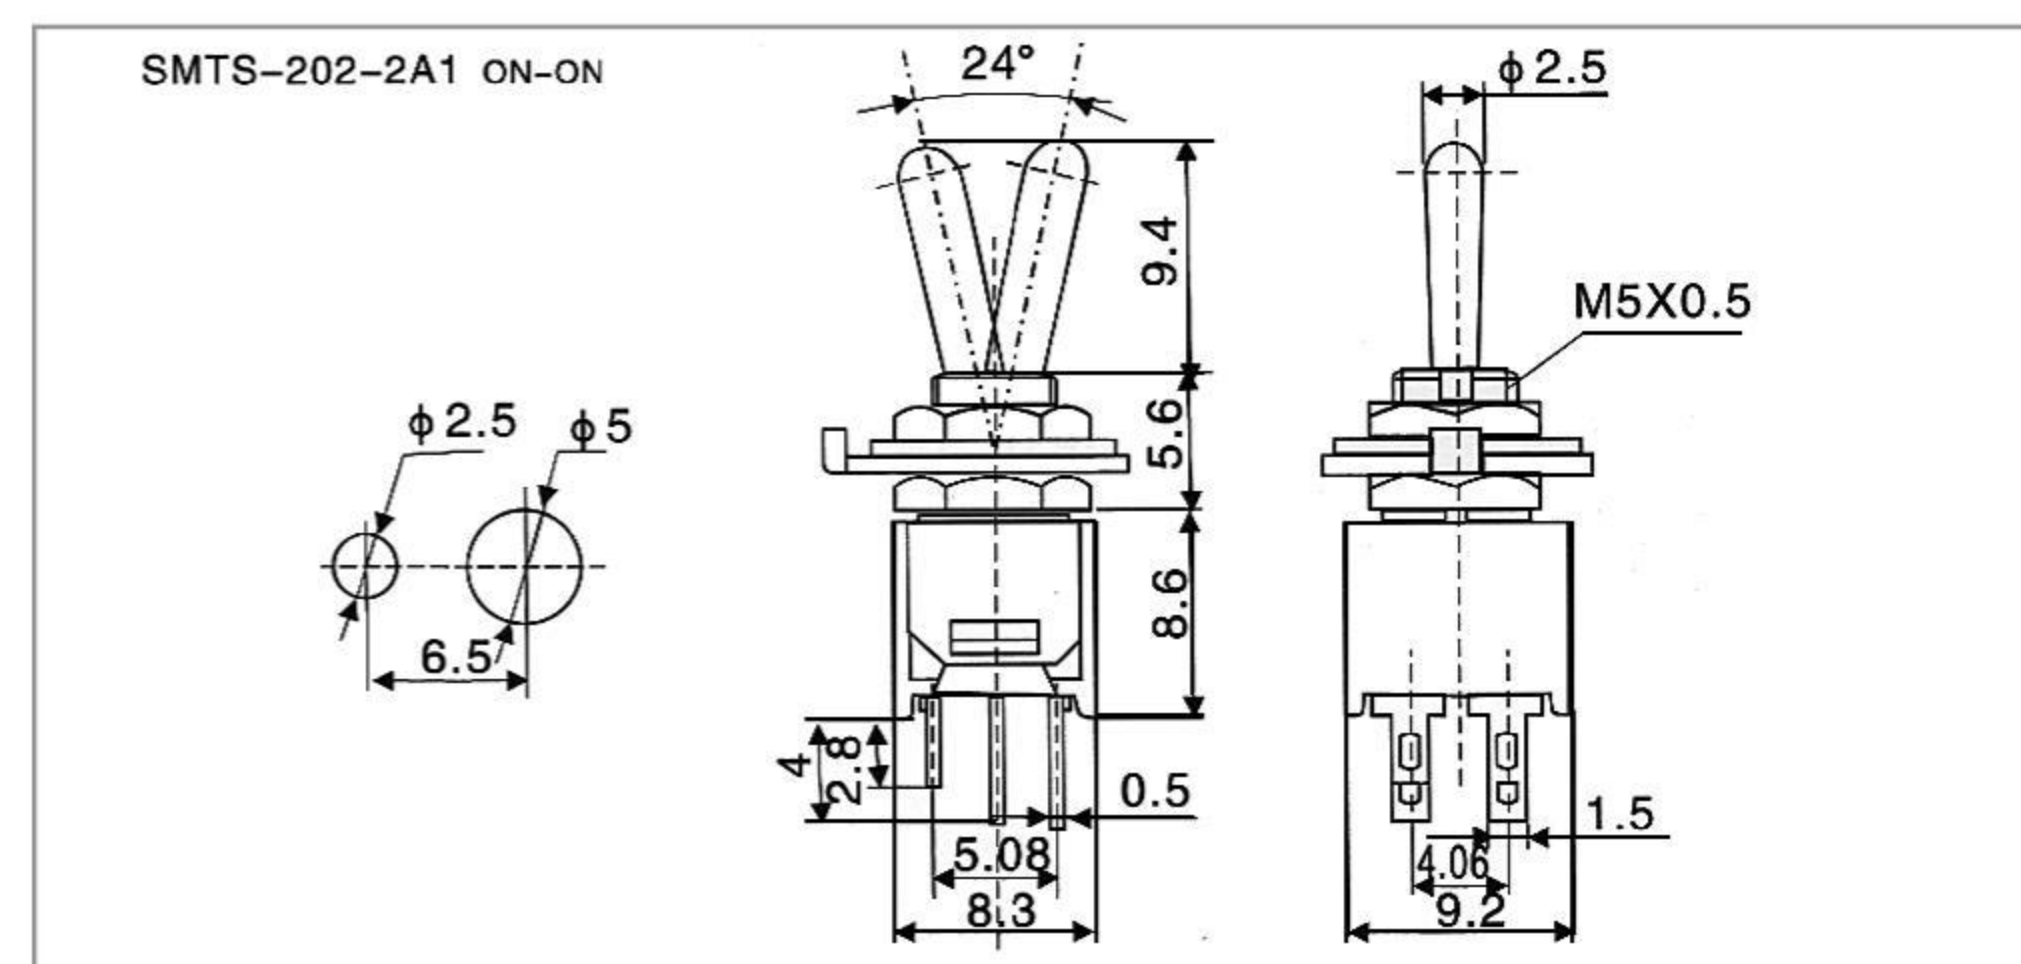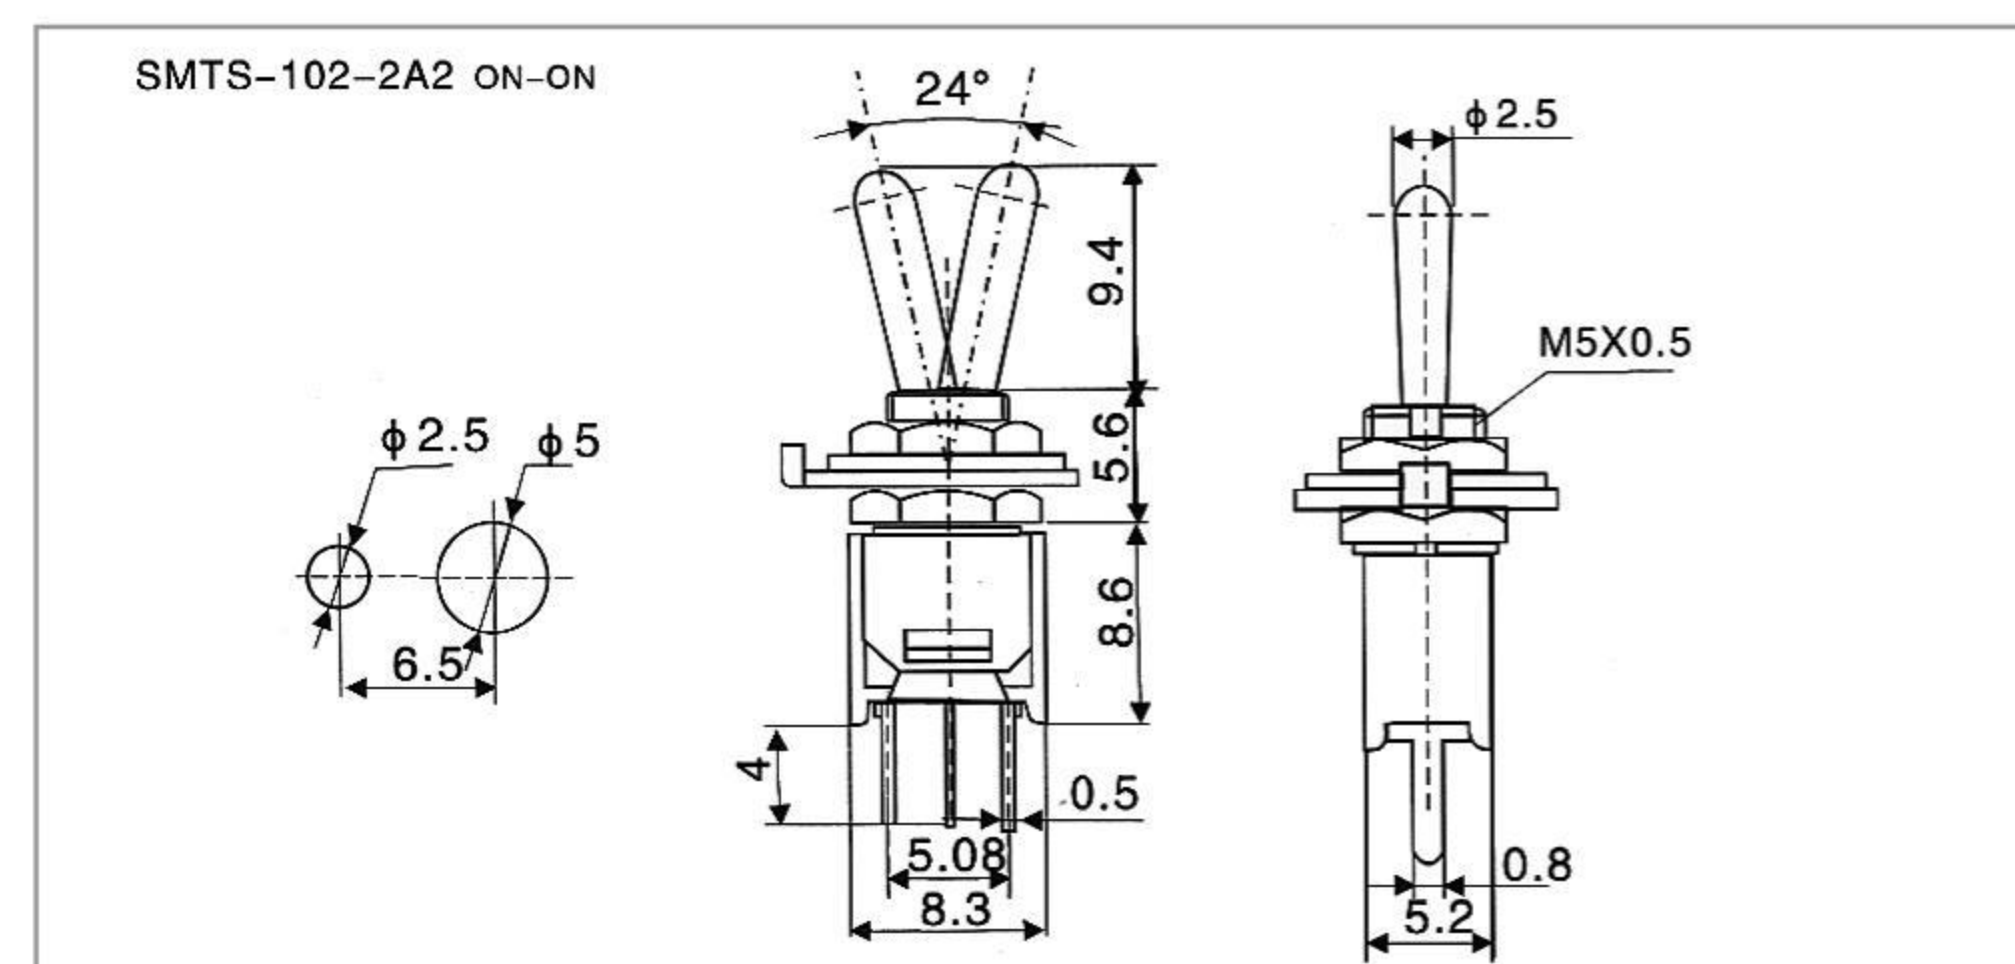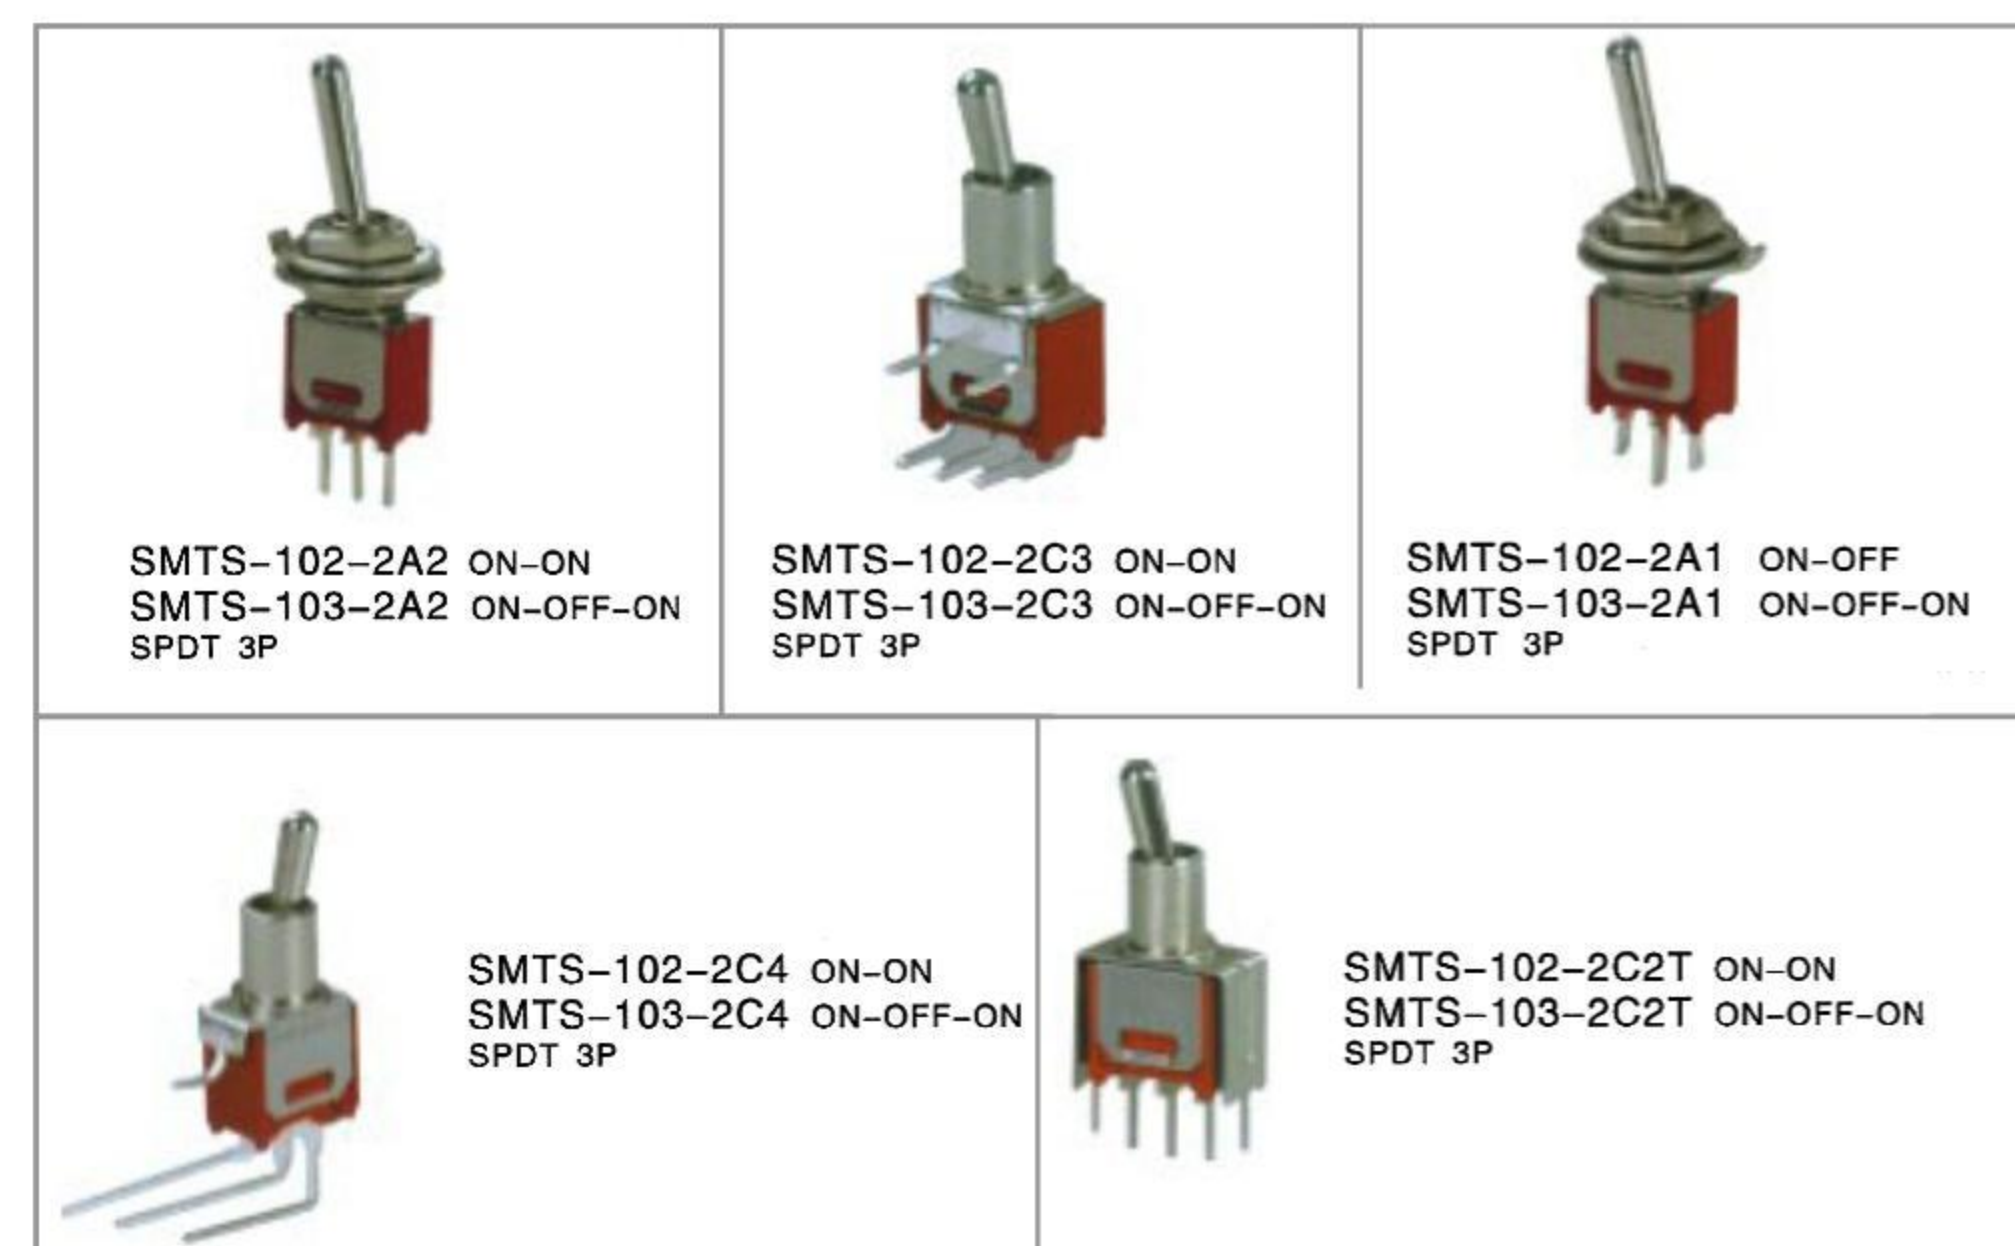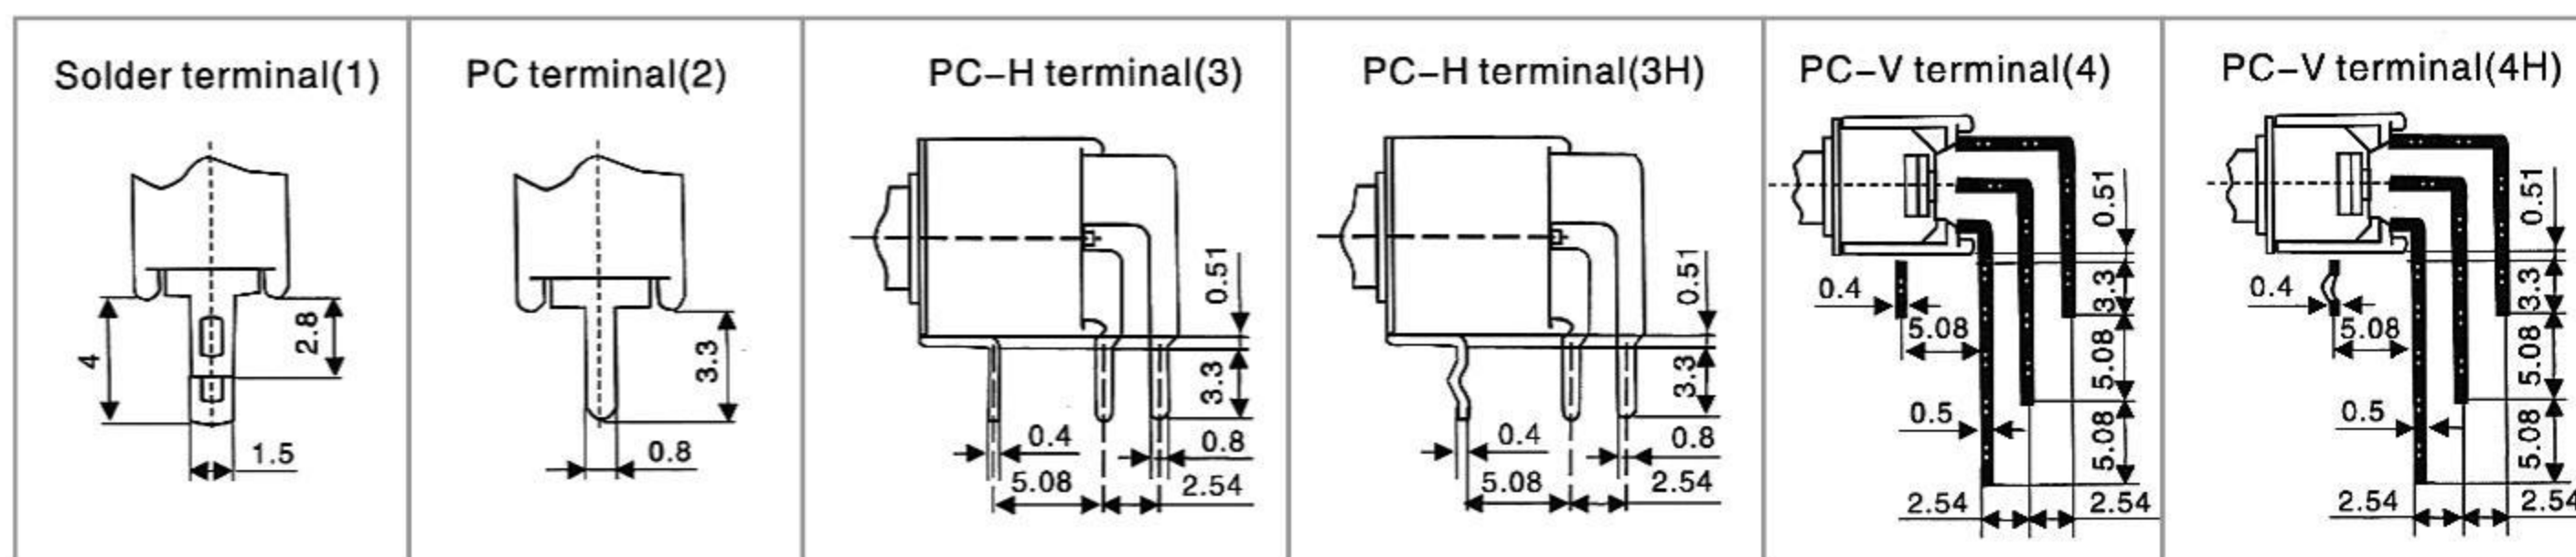

超小型摇臂開關 SUB-MINIATURE ROCKER AND LEVER SWITCH



型号说明 Ordering Information

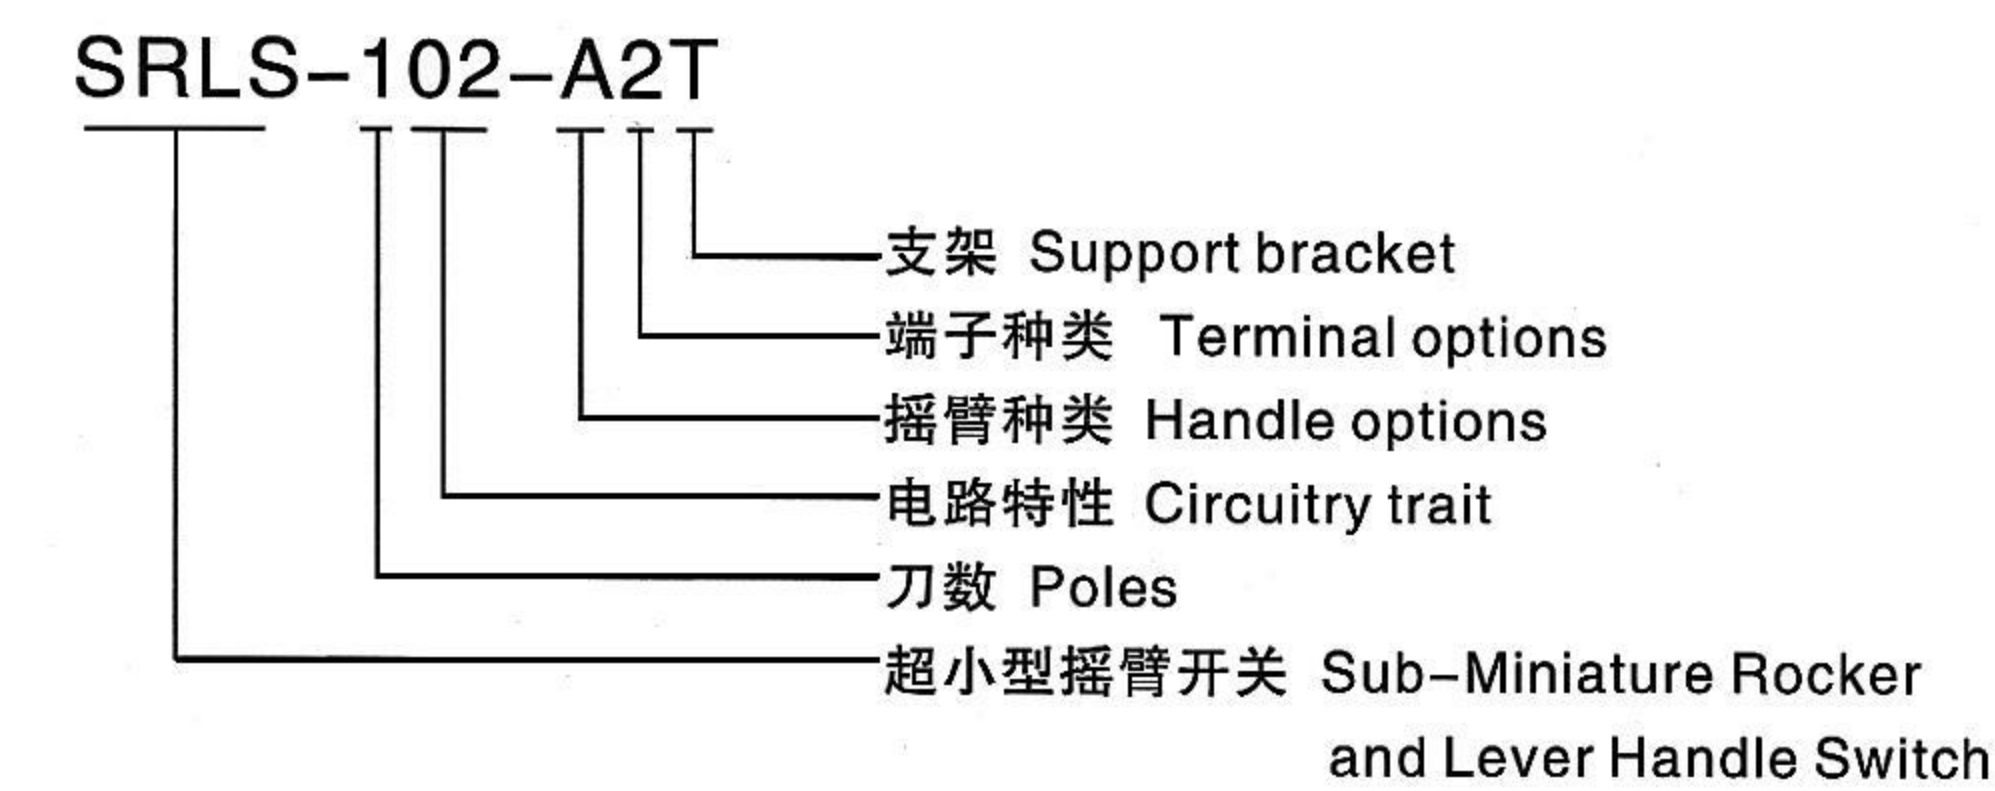


技术特性 Specification

- 规格 Rating: 3A 125VAC; 1.5A250VAC
- 接触电阻 Contact Resistance: 20m Ω max
- 绝缘电阻 Insulation Resistance: 500VDC 1000M Ω min
- 耐电压 Dielectric Strength: 1000VAC, 1Minute
- 操作温度 Operating Temperature: -25°C~+85°C
- 电气寿命 Electrical Life: 10,000 Cycles






电路特性 Circuitry trait

01	ON	-	OFF
02	ON	-	ON
03	ON	OFF	ON

摇臂种类 Rocker Options

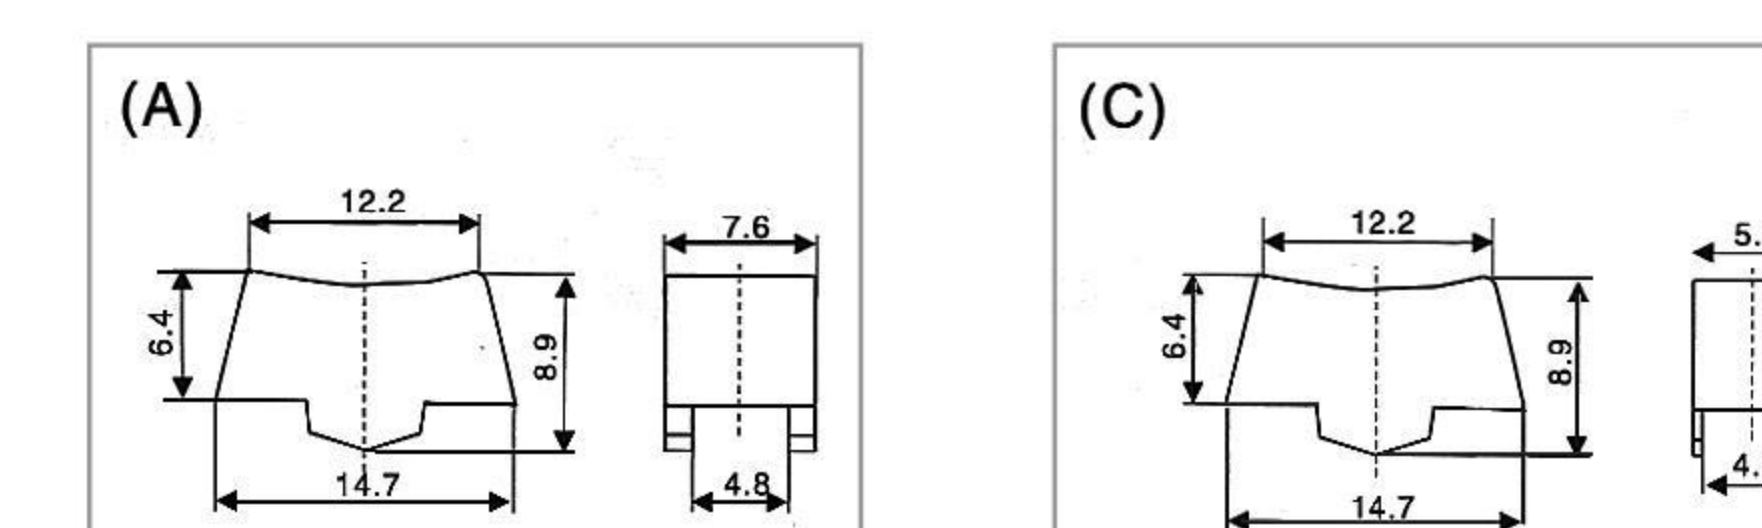


端子种类 Terminal options

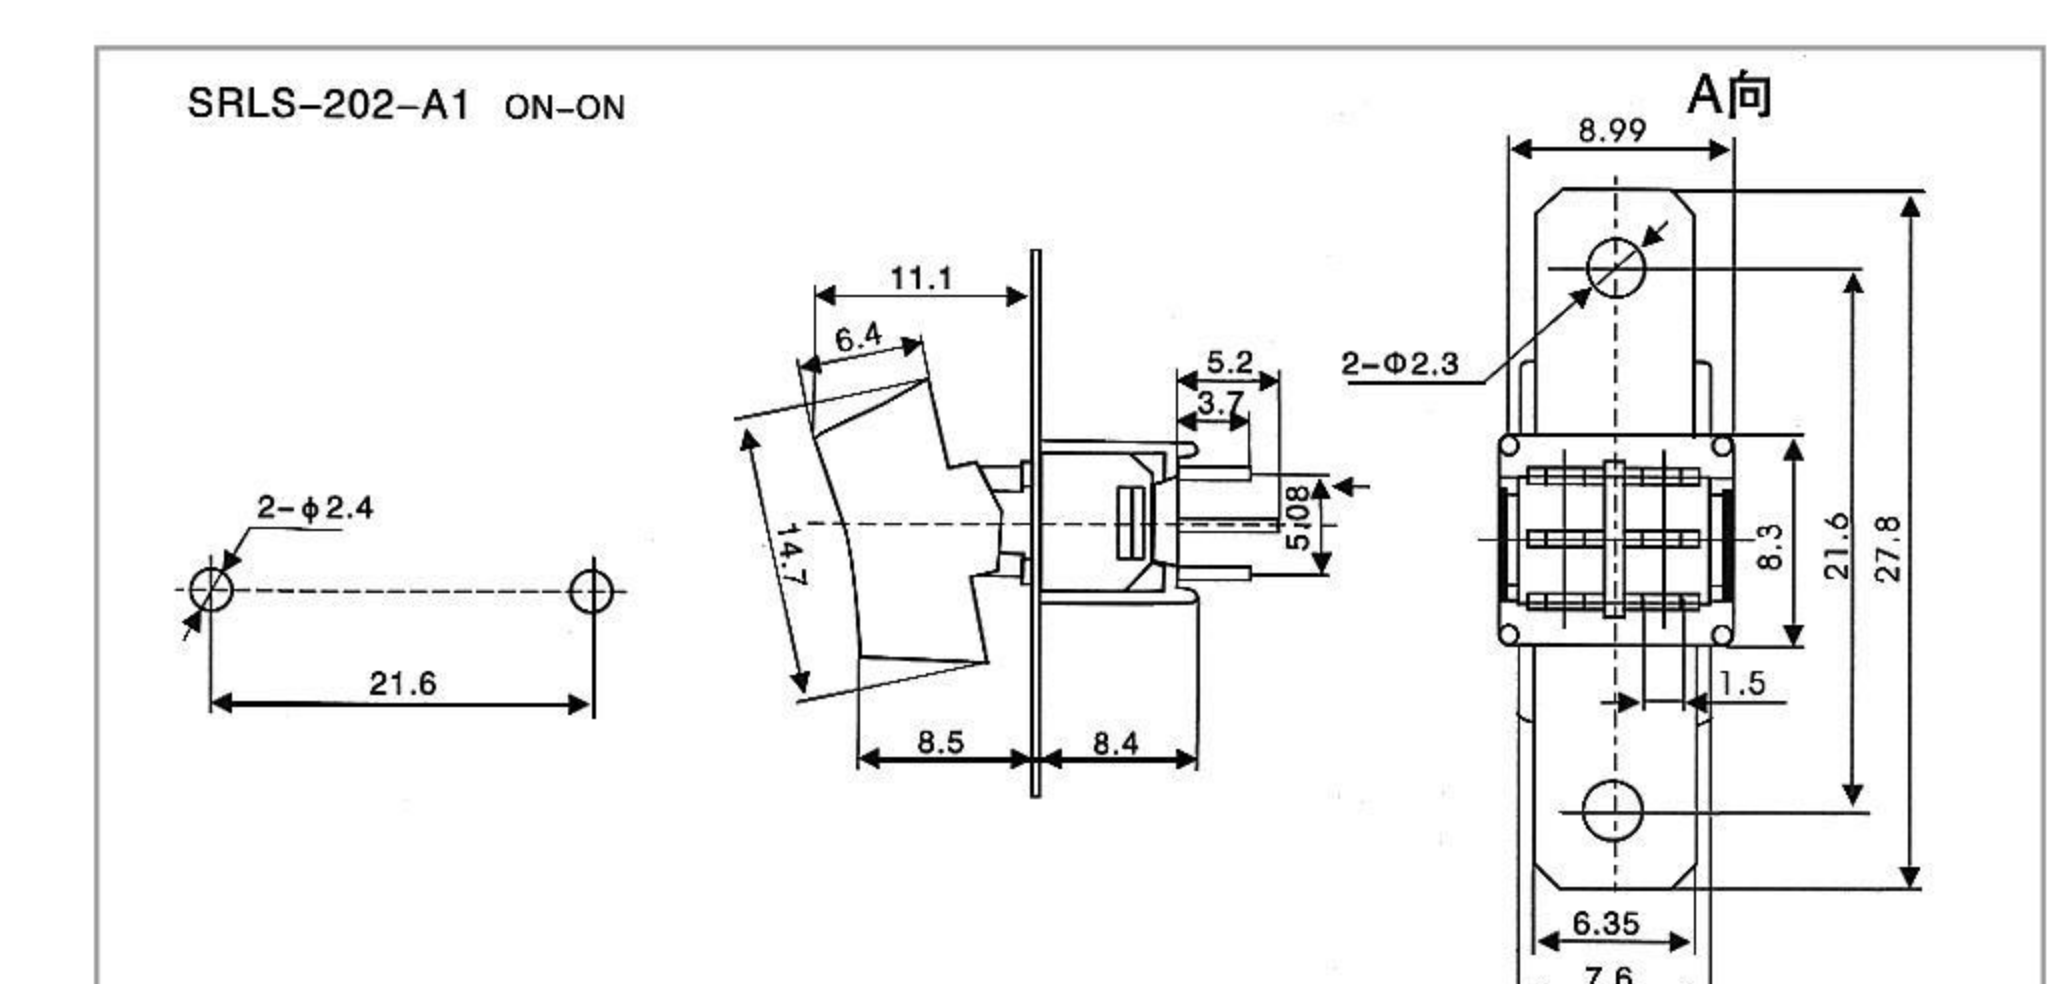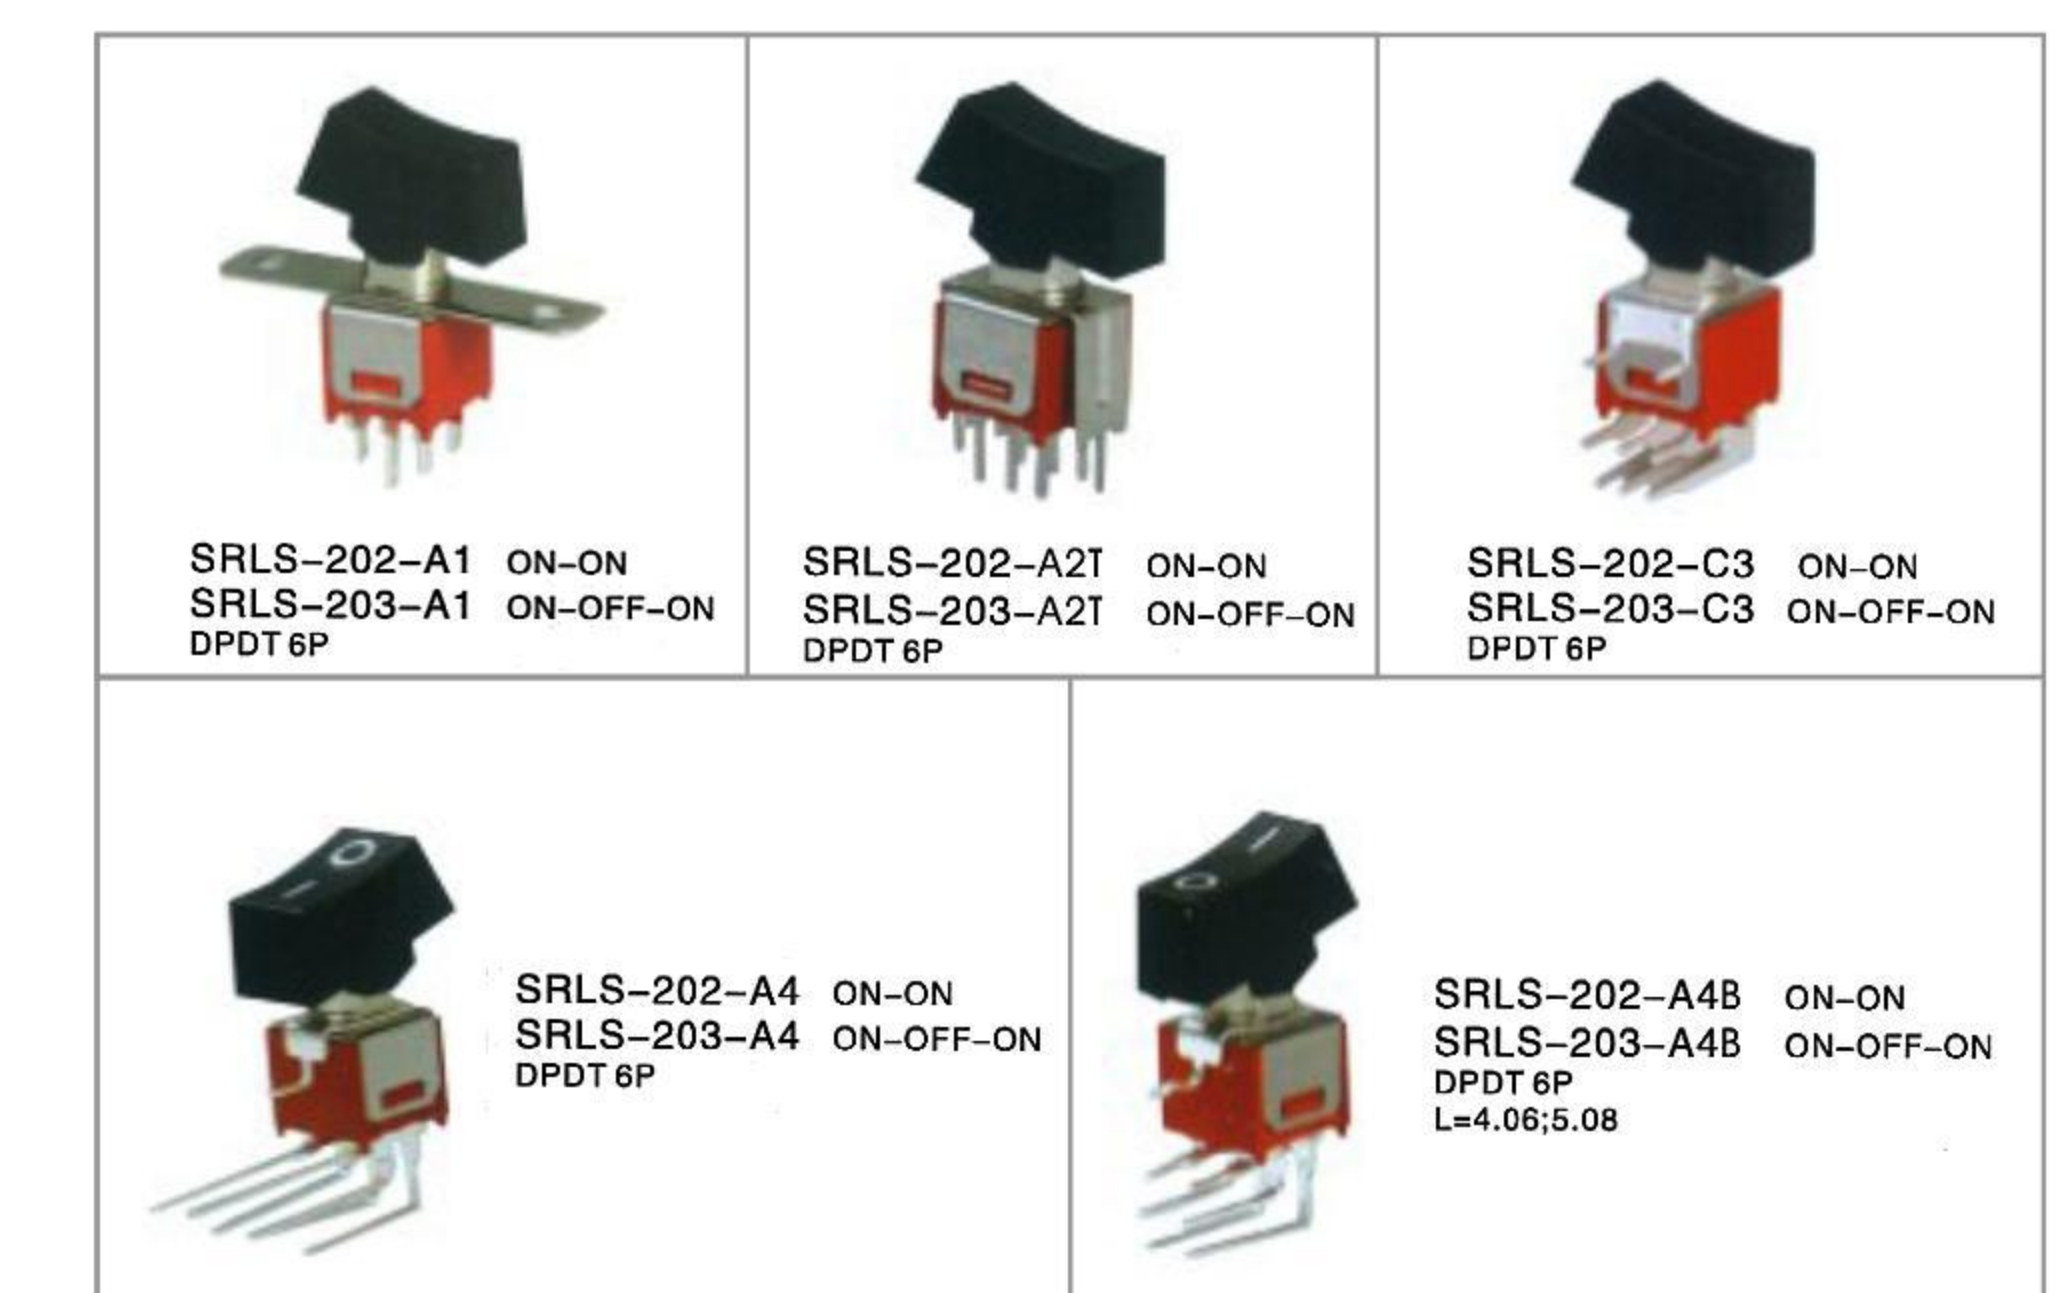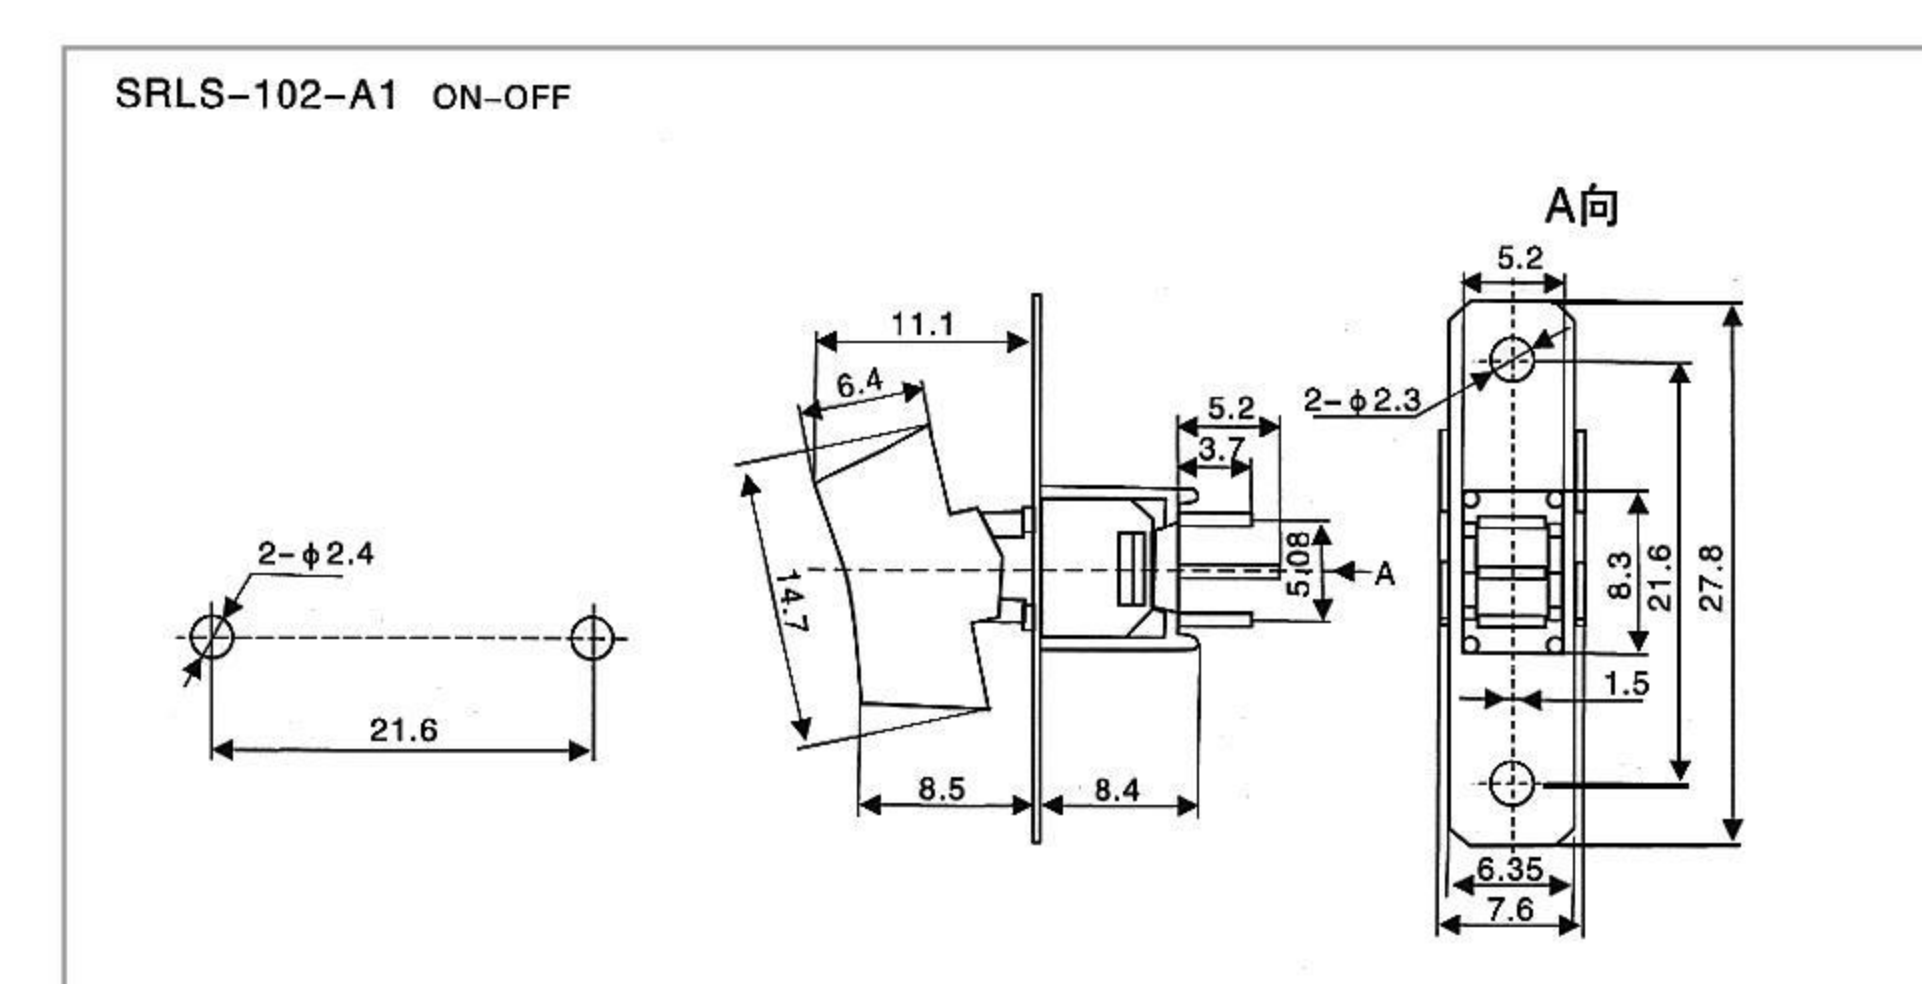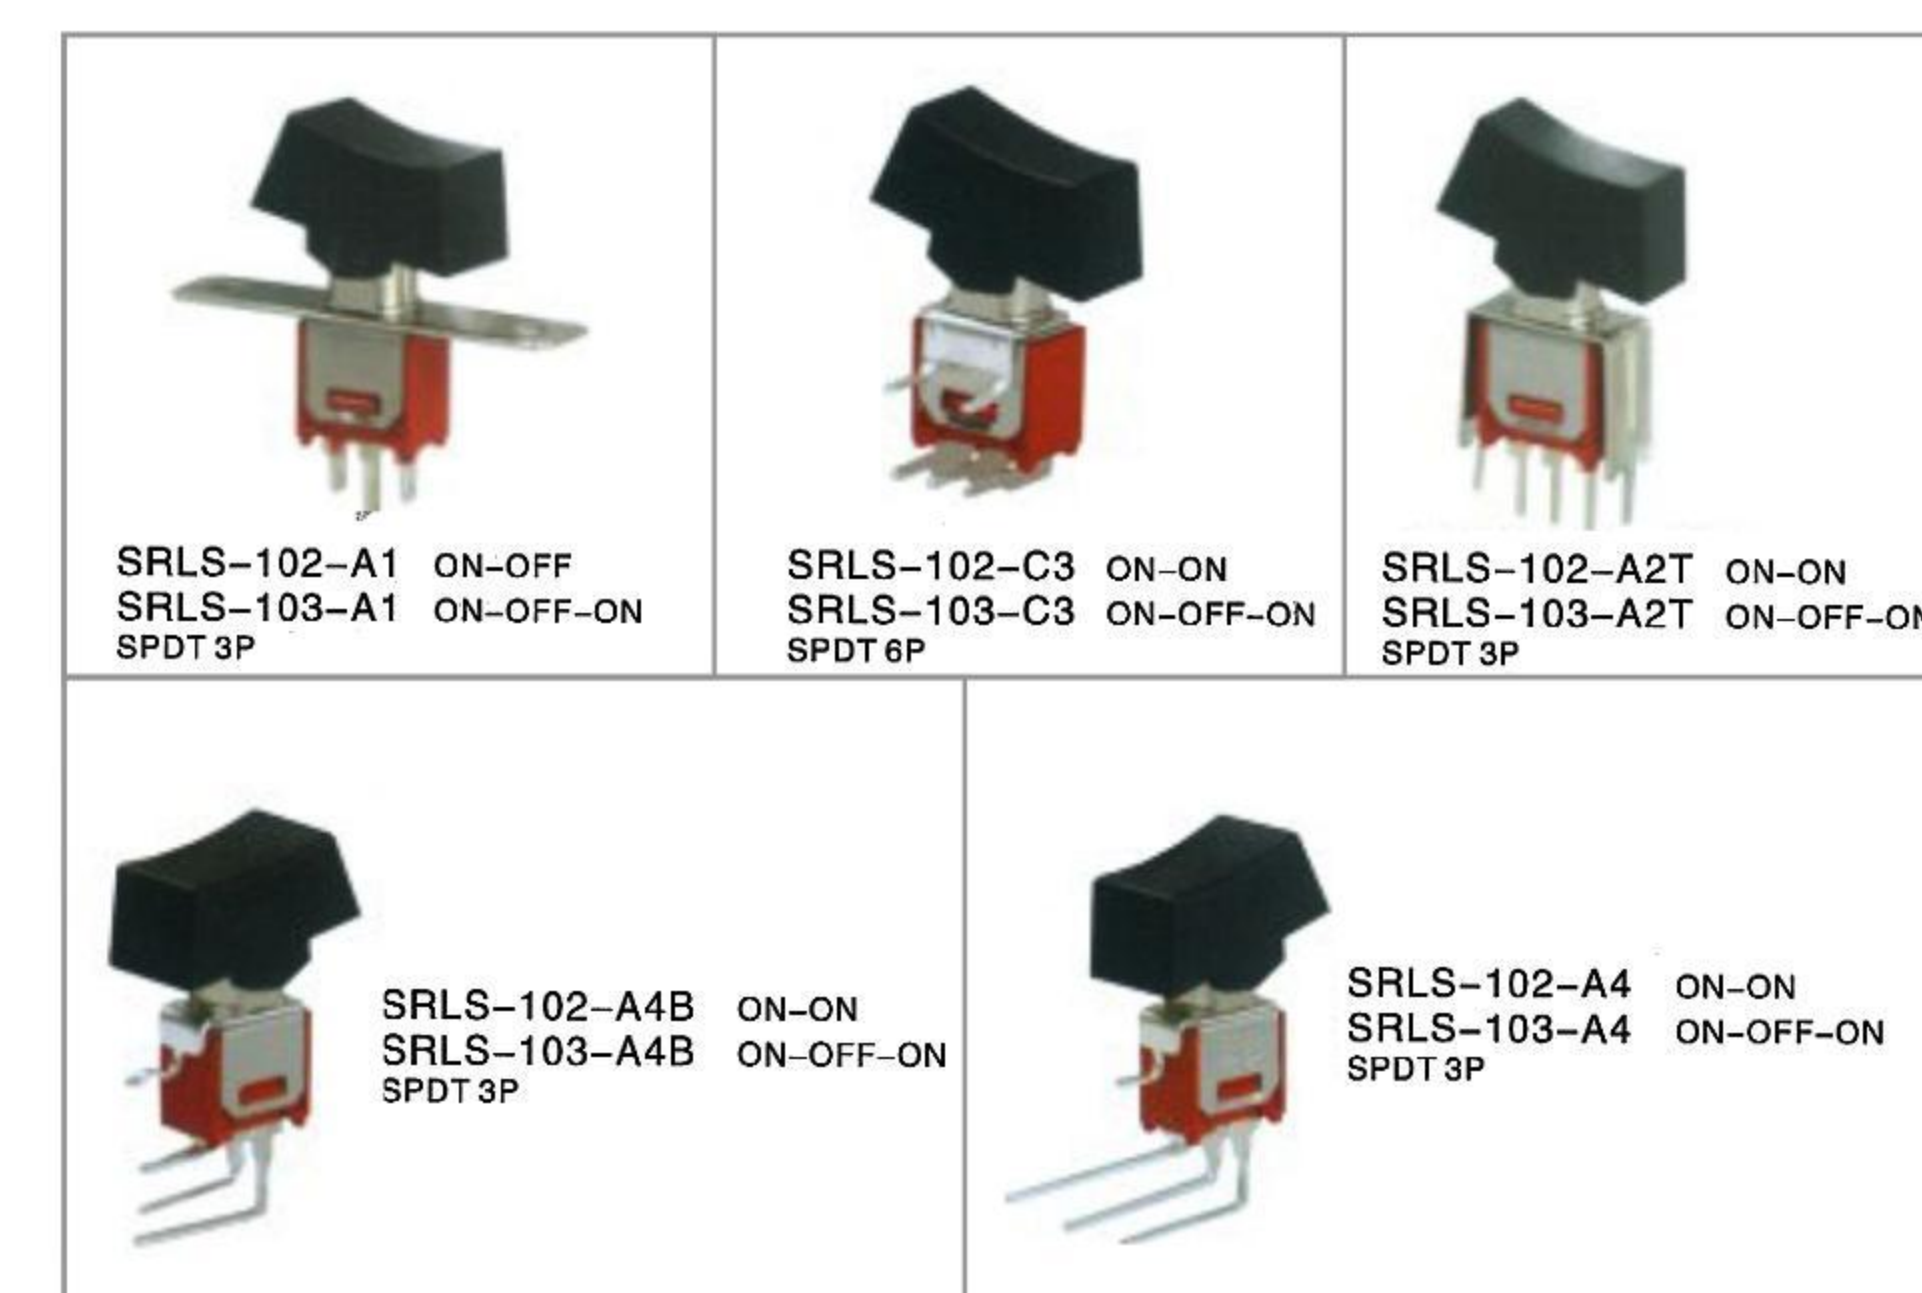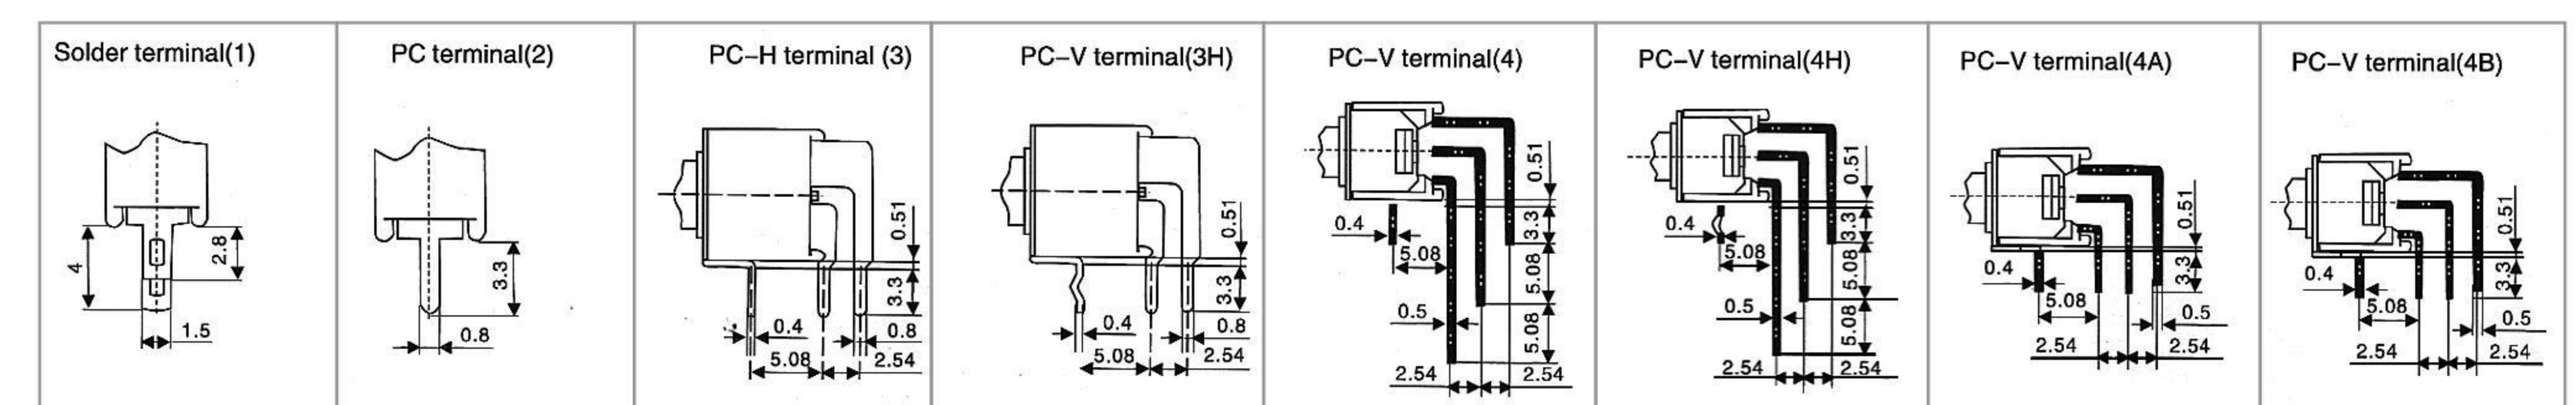

小型扭子開關
MINIATURE TOGGLE SWITCH

型号说明 Ordering Information

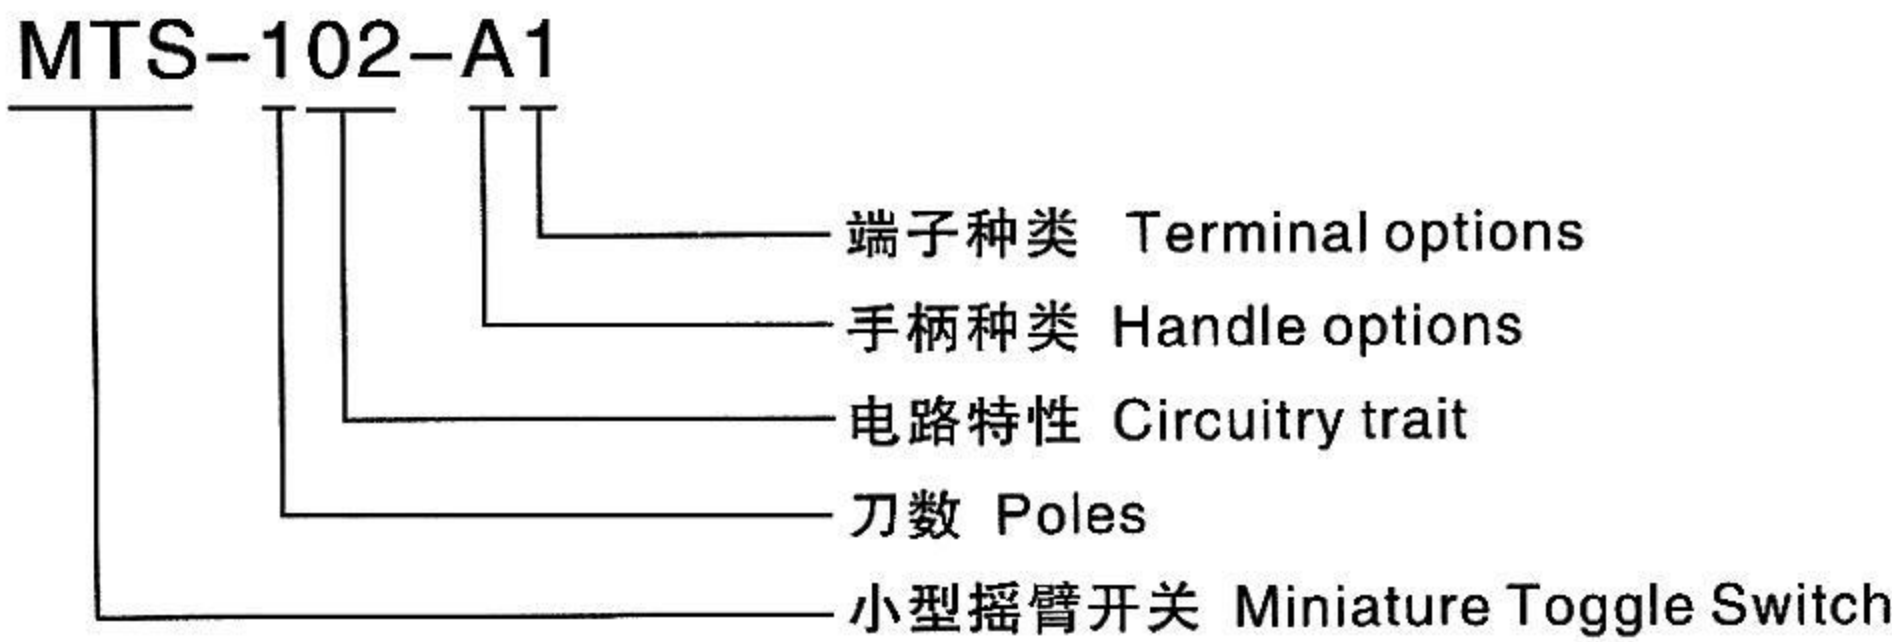

电路特性 Circuitry trait


型号 Model NO	电路特性 Circuitry trait			类型 Type	端子线 Terminals
MTS-101	ON	—	OFF	SPST	2P
MTS-102	ON	—	ON	SPST	3P
MTS-112	ON	—	(ON)	SPST	3P
MTS-103	ON	OFF	ON	SPST	3P
MTS-113	ON	OFF	(ON)	SPST	3P
MTS-123	(ON)	OFF	(ON)	SPST	3P

()回弹指示 Indicates Momentary


防水帽 Water proof cap




轴套种类 Bushing options

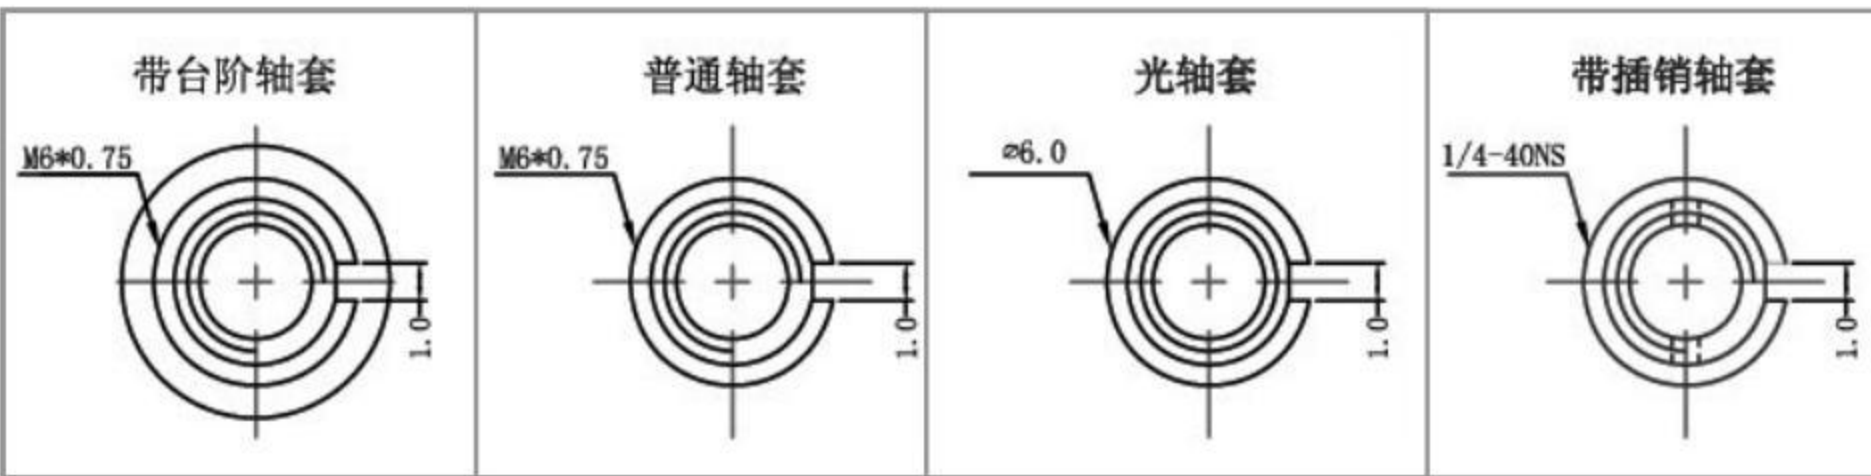

手柄种类 Handle options

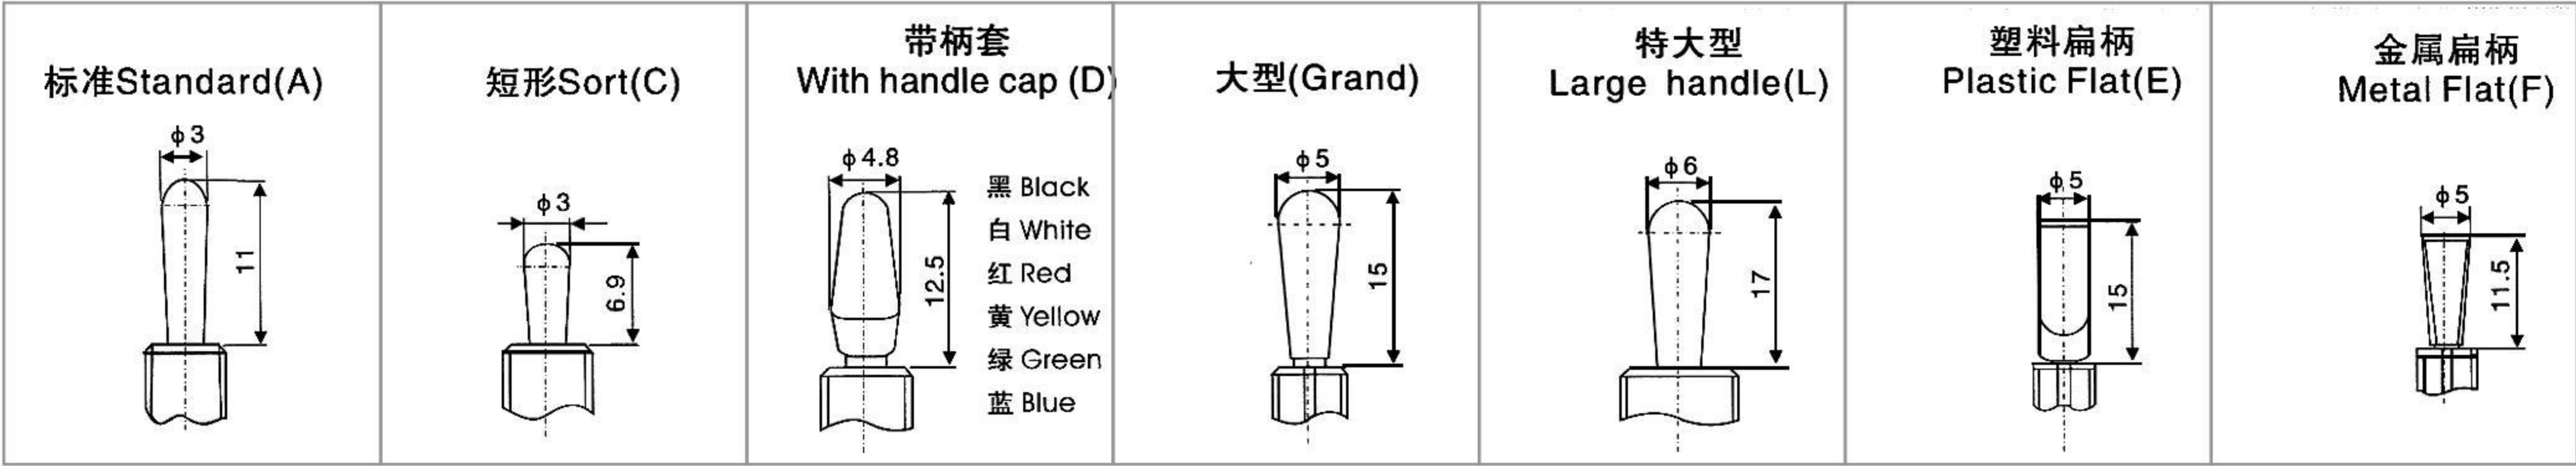

端子种类 Handle options

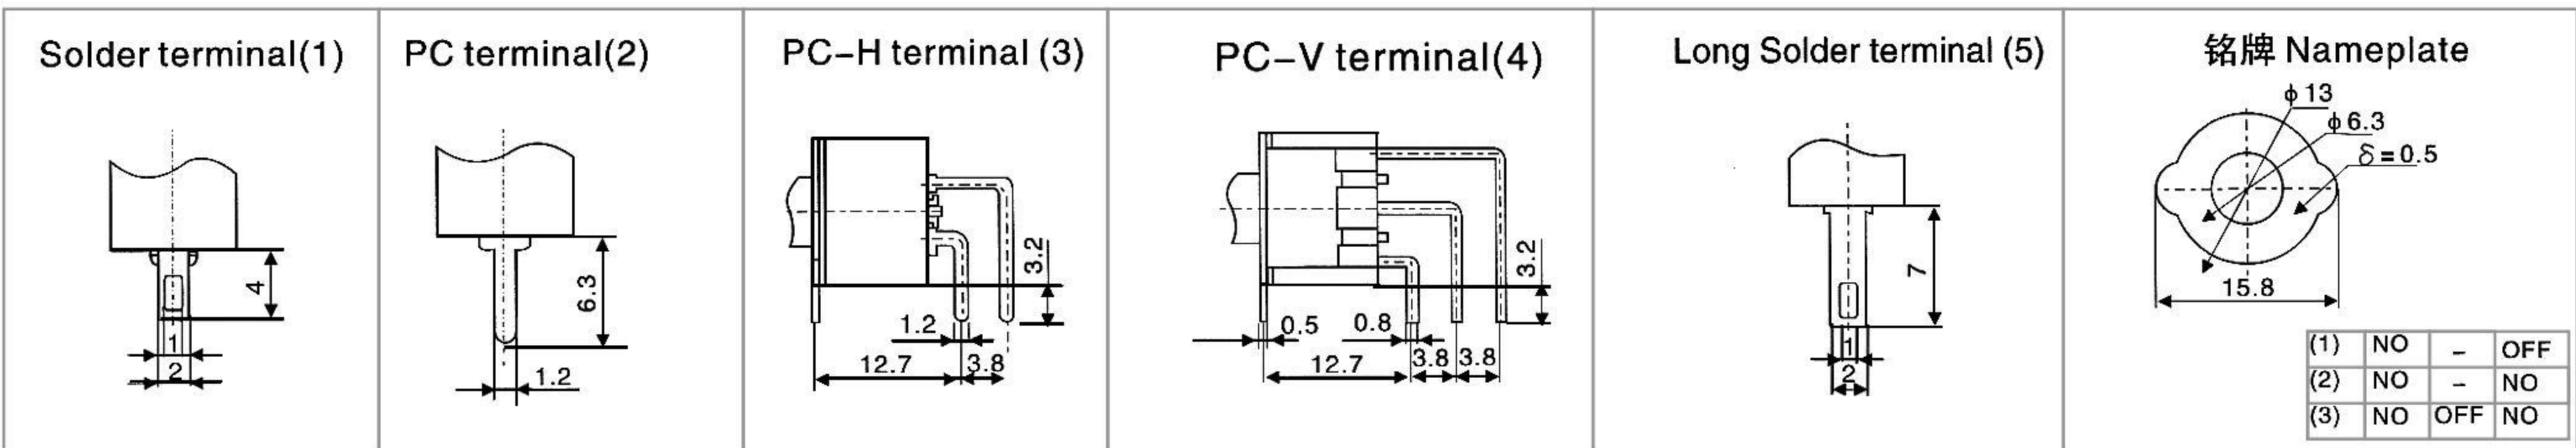

(1)	NO	-	OFF
(2)	NO	-	NO
(3)	NO	OFF	NO







技术特性 Specification

- 规格 Rating: 6A 125VAC; 3A 250VAC
- 接触电阻 Contact Resistance: 20m Ω max
- 绝缘电阻 Insulation Resistance: 500VDC 1000M Ωmin
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature : -25℃~+85℃
- 电气寿命 Electrical Life: 10,000 Cycles

基座颜色 Base color






材料 Material	基座颜色Base color		
塑料 PBT	蓝Blue	黑Black	绿Green
电木 Badelite	红Red	黑Black	

小型扭子開關
MINIATURE TOGGLE SWITCH

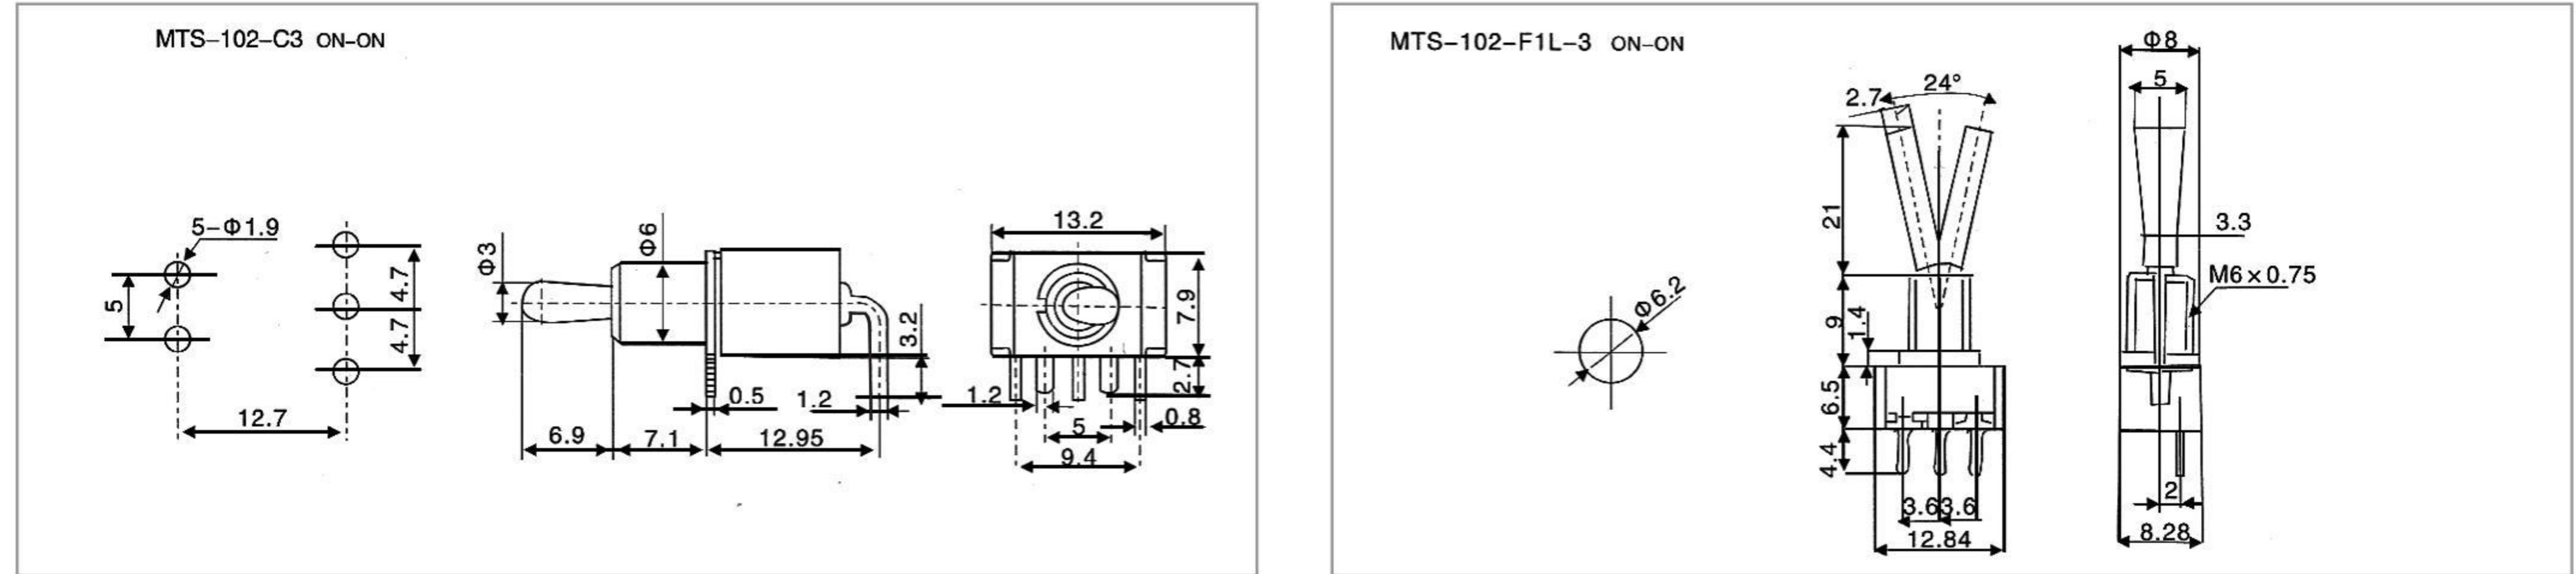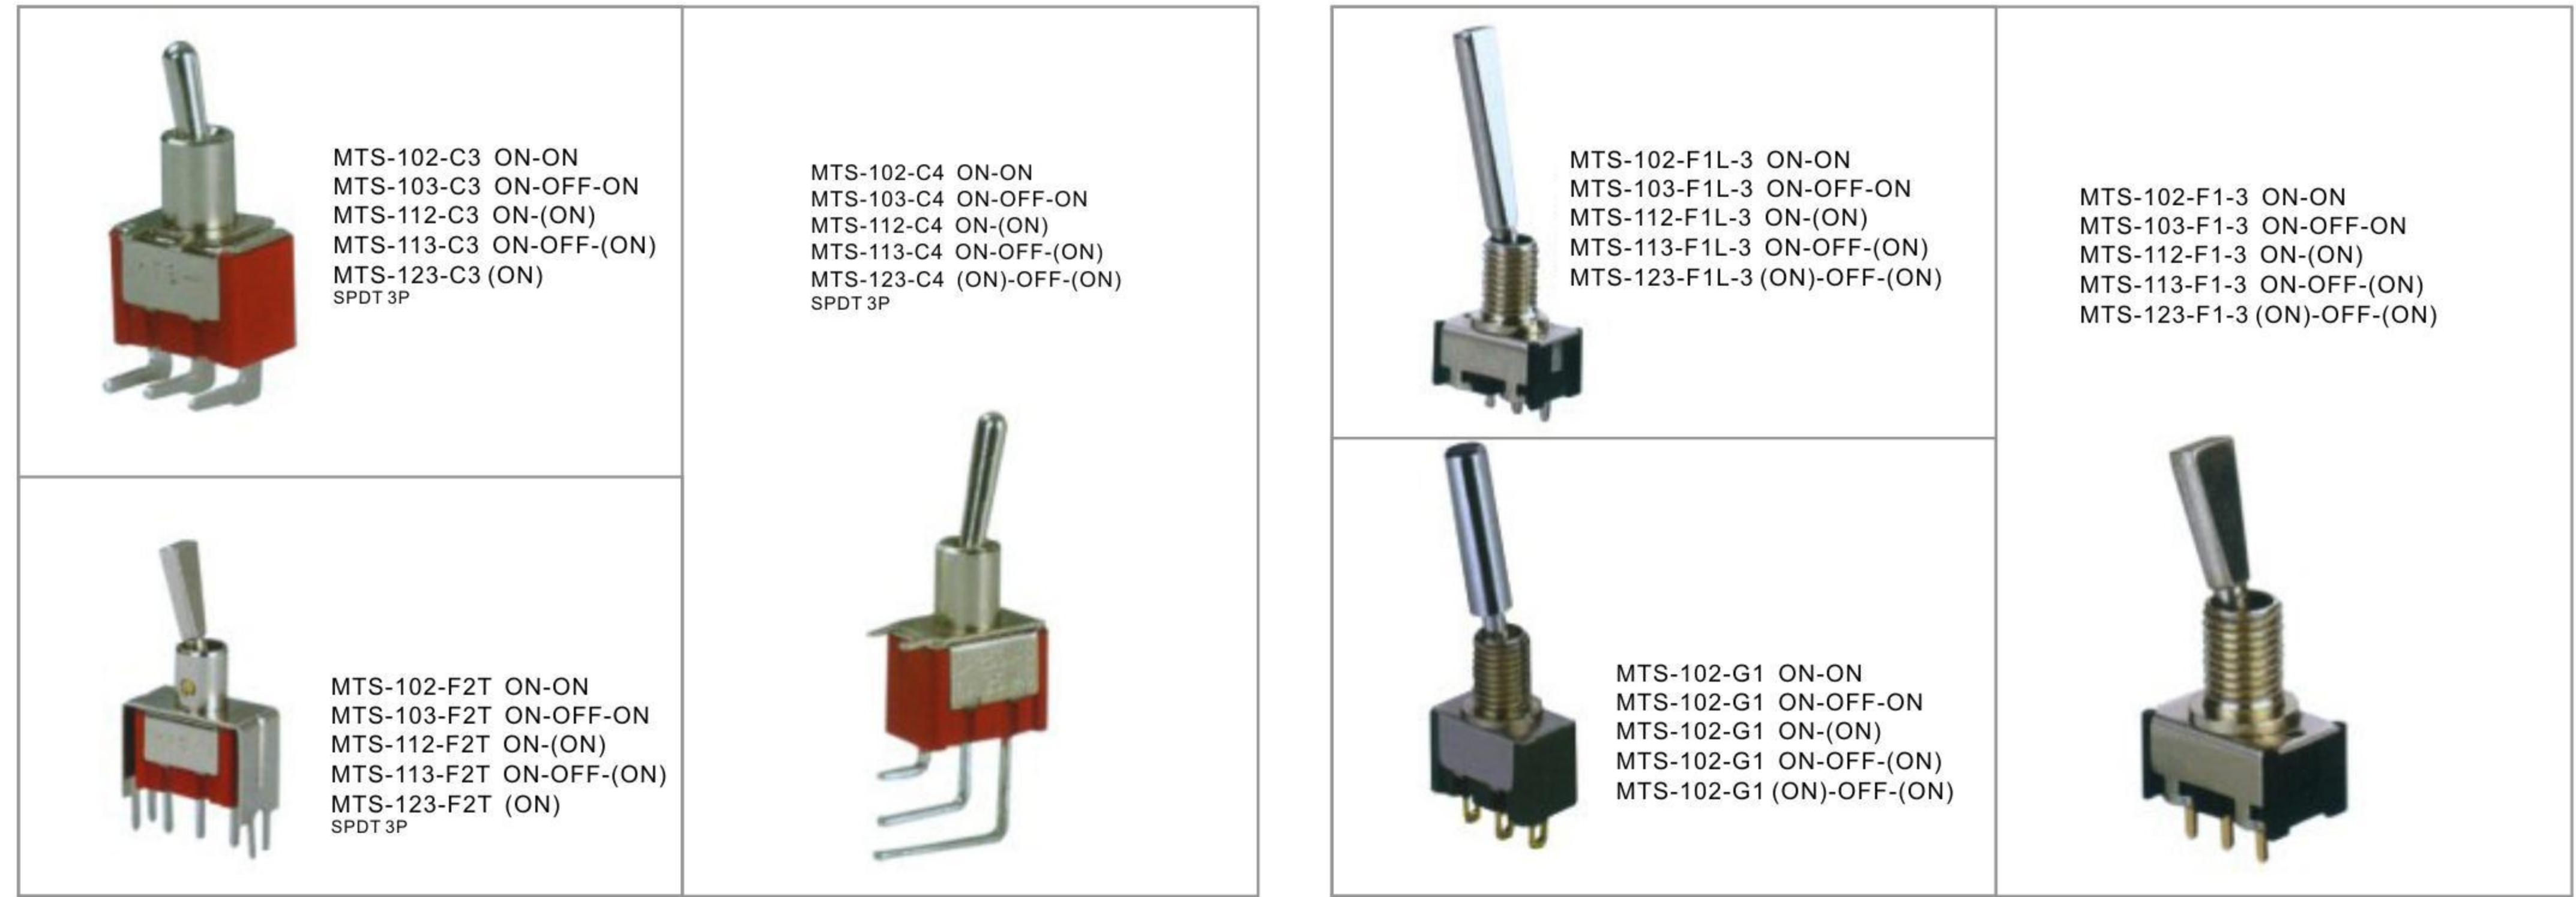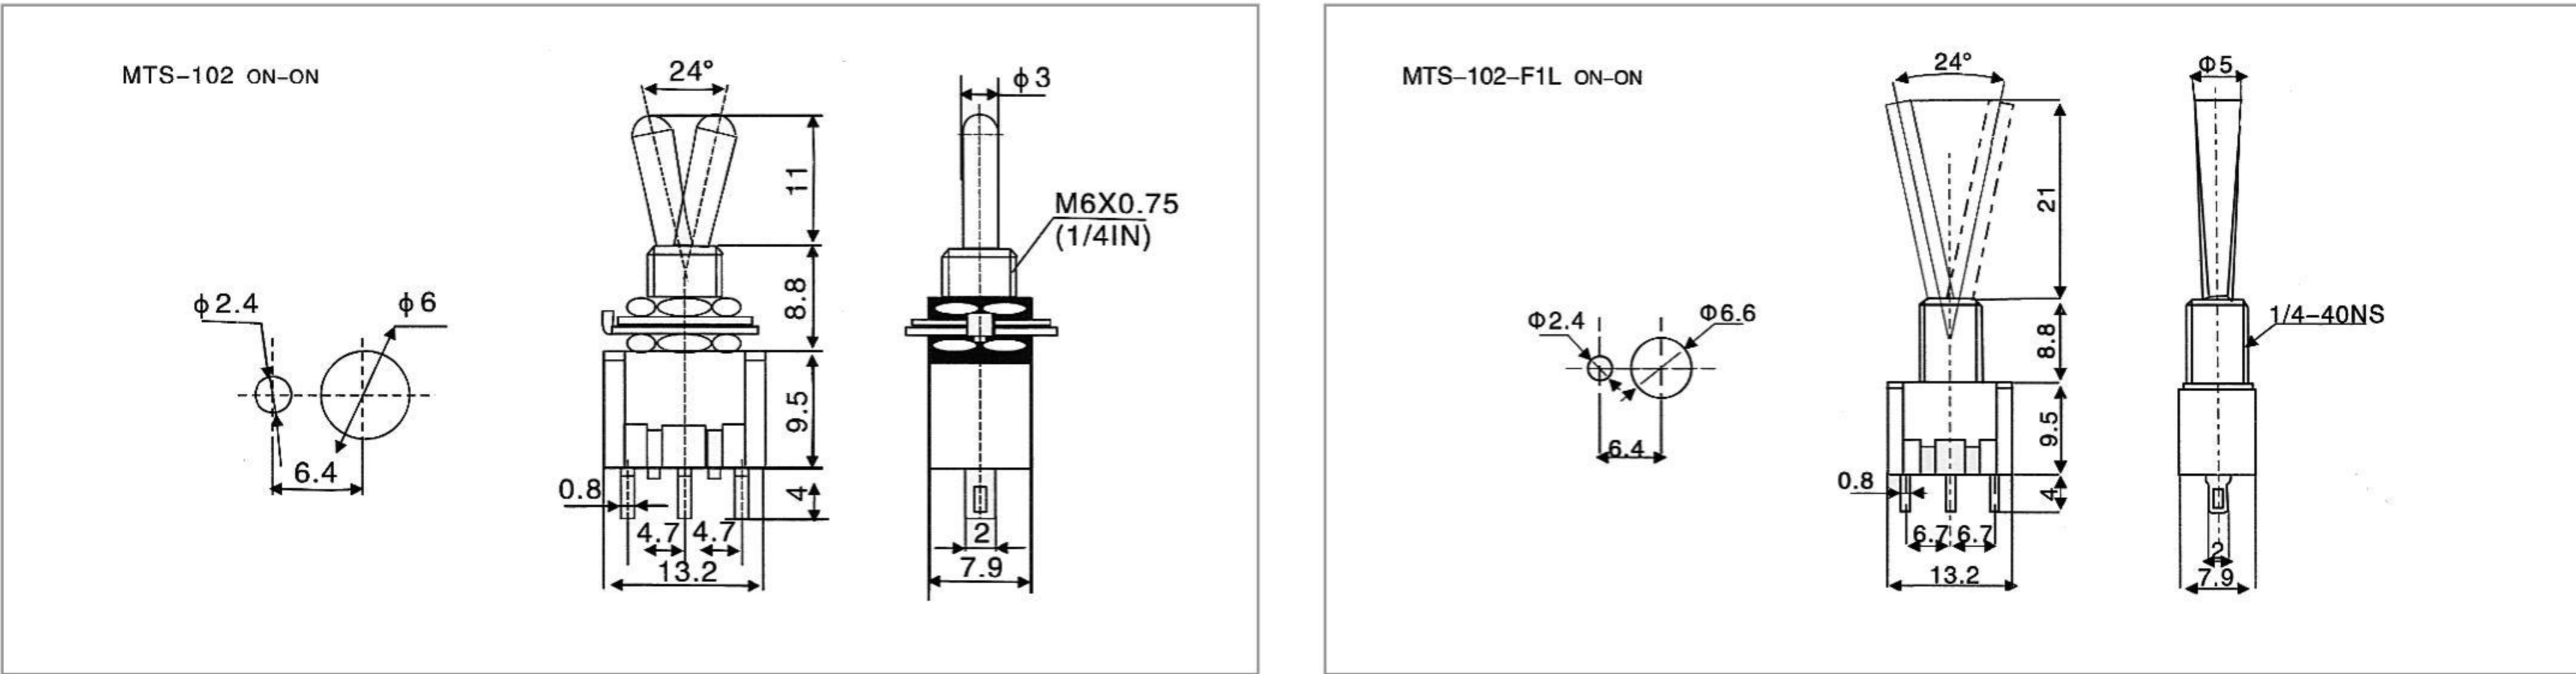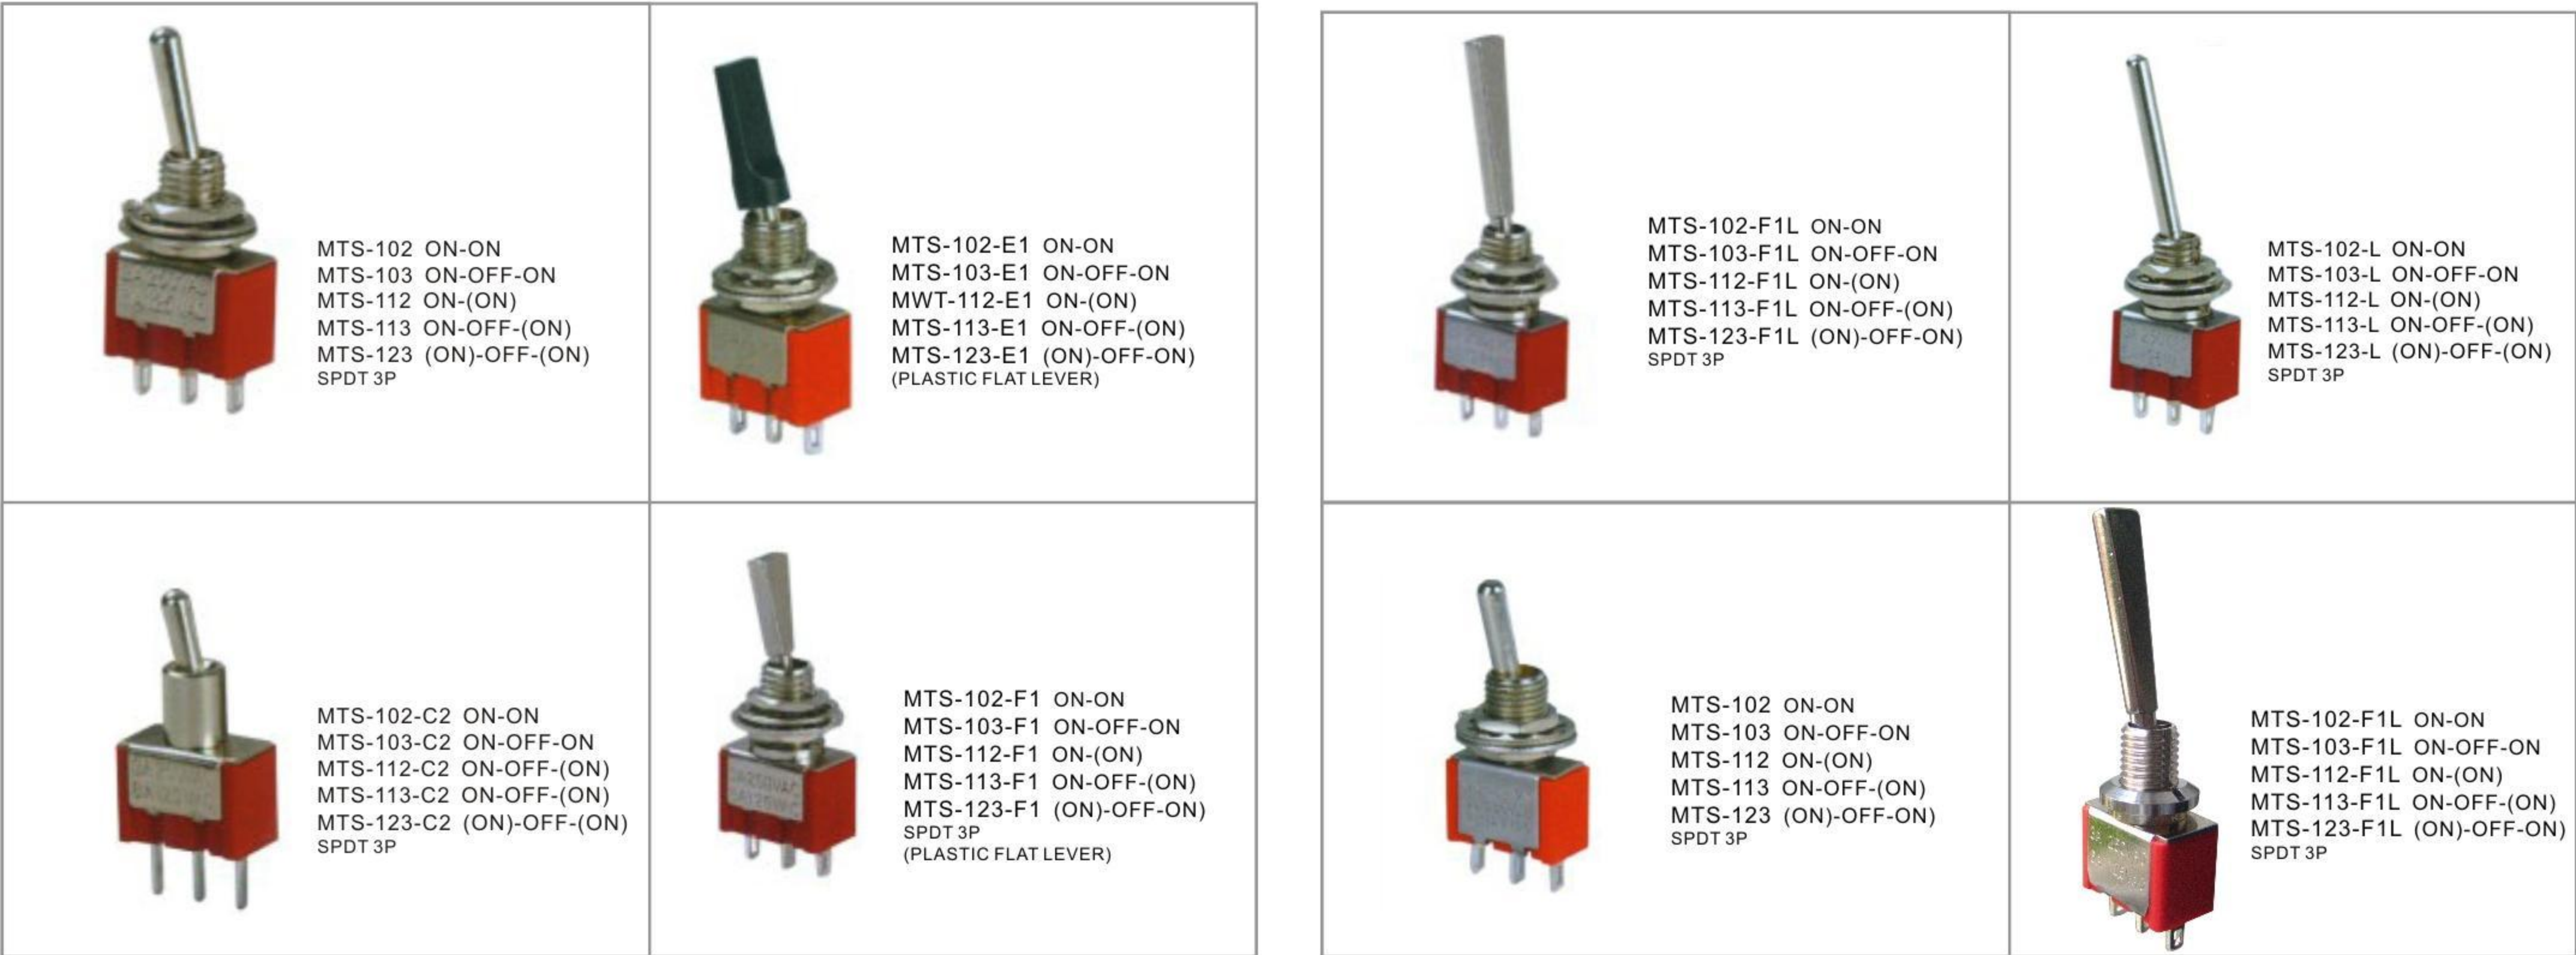


小型扭子開關 MINIATURE TOGGLE SWITCH

小型摇臂開關 MINIATURE ROCKER AND LEVER SWITCH

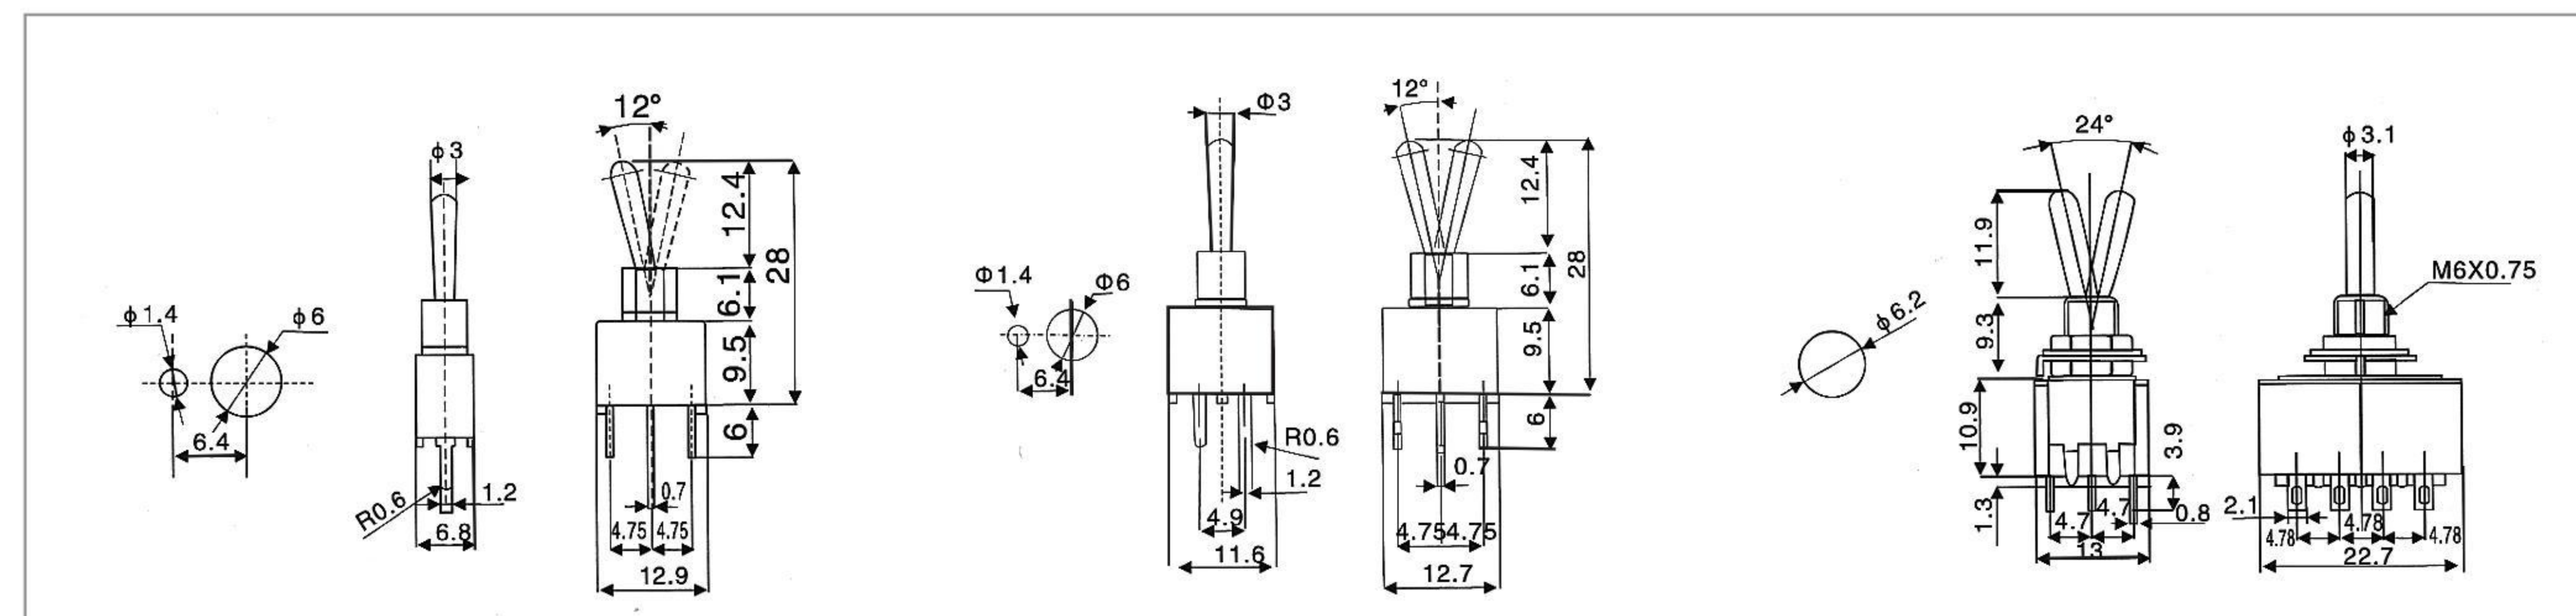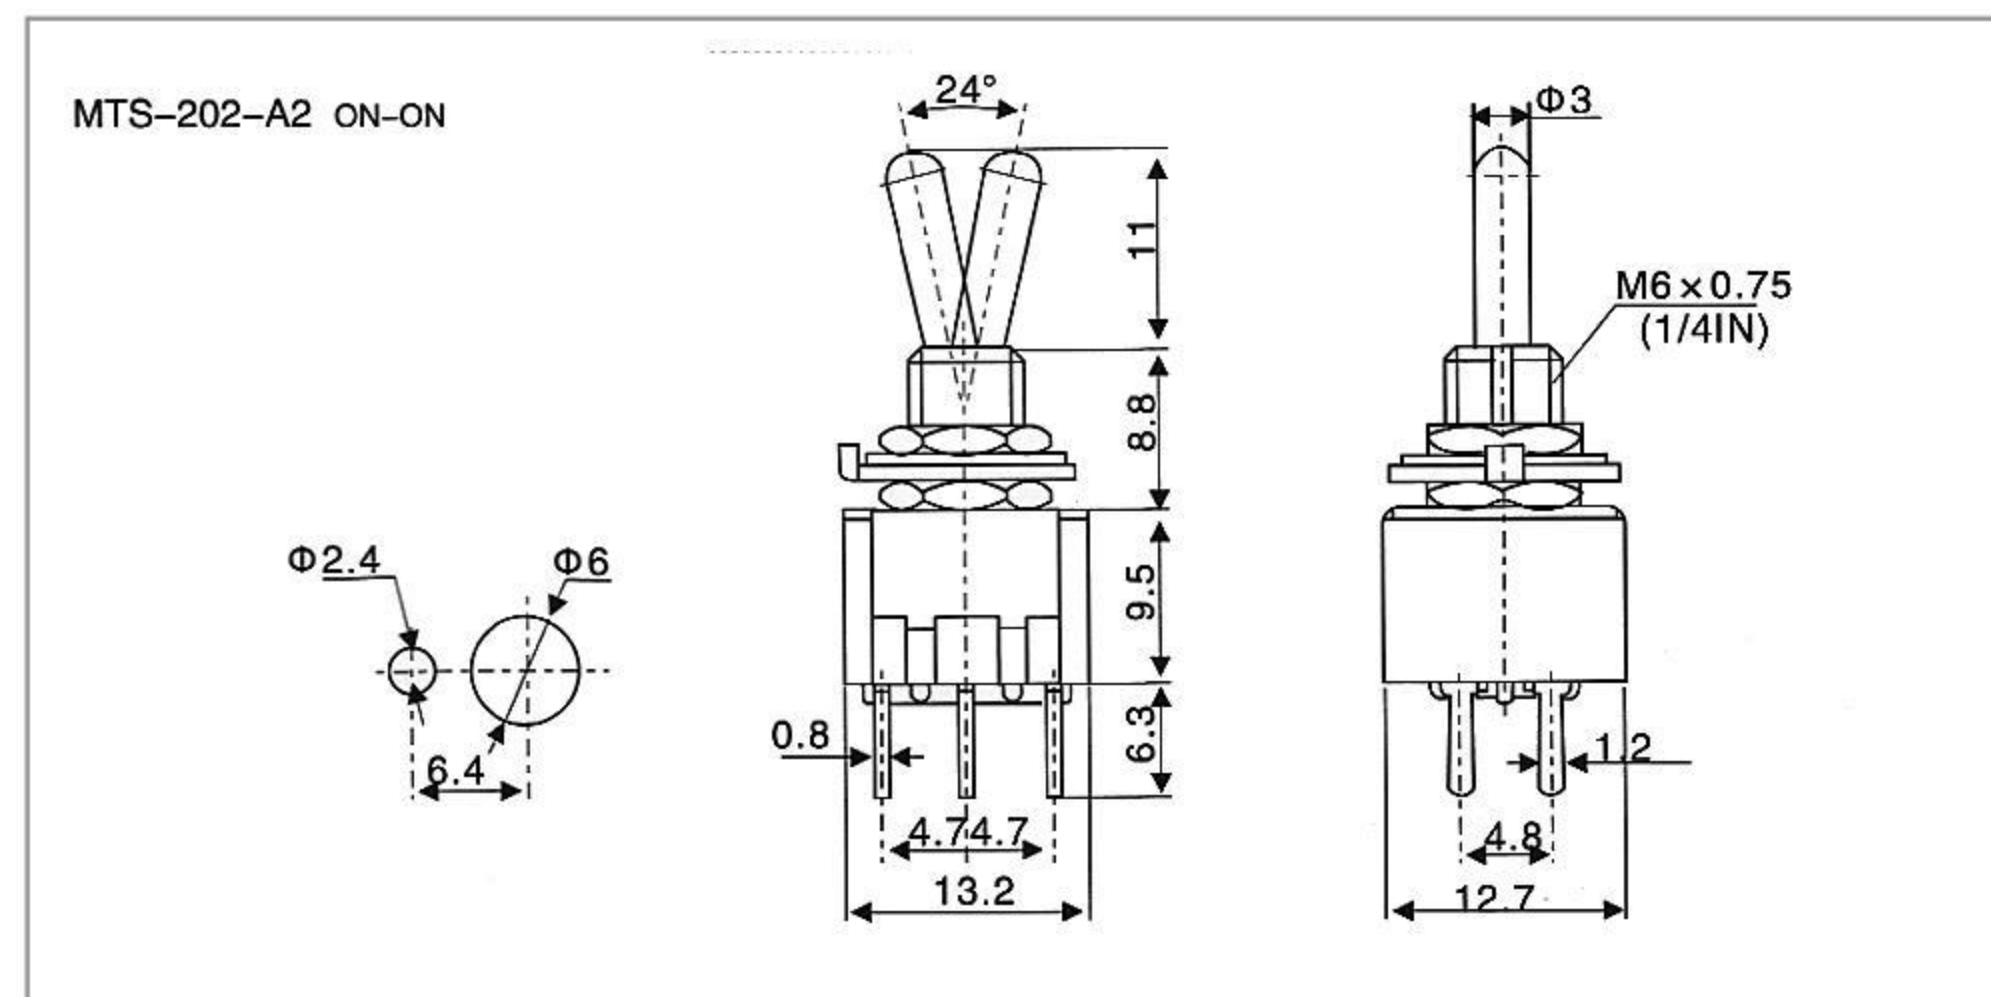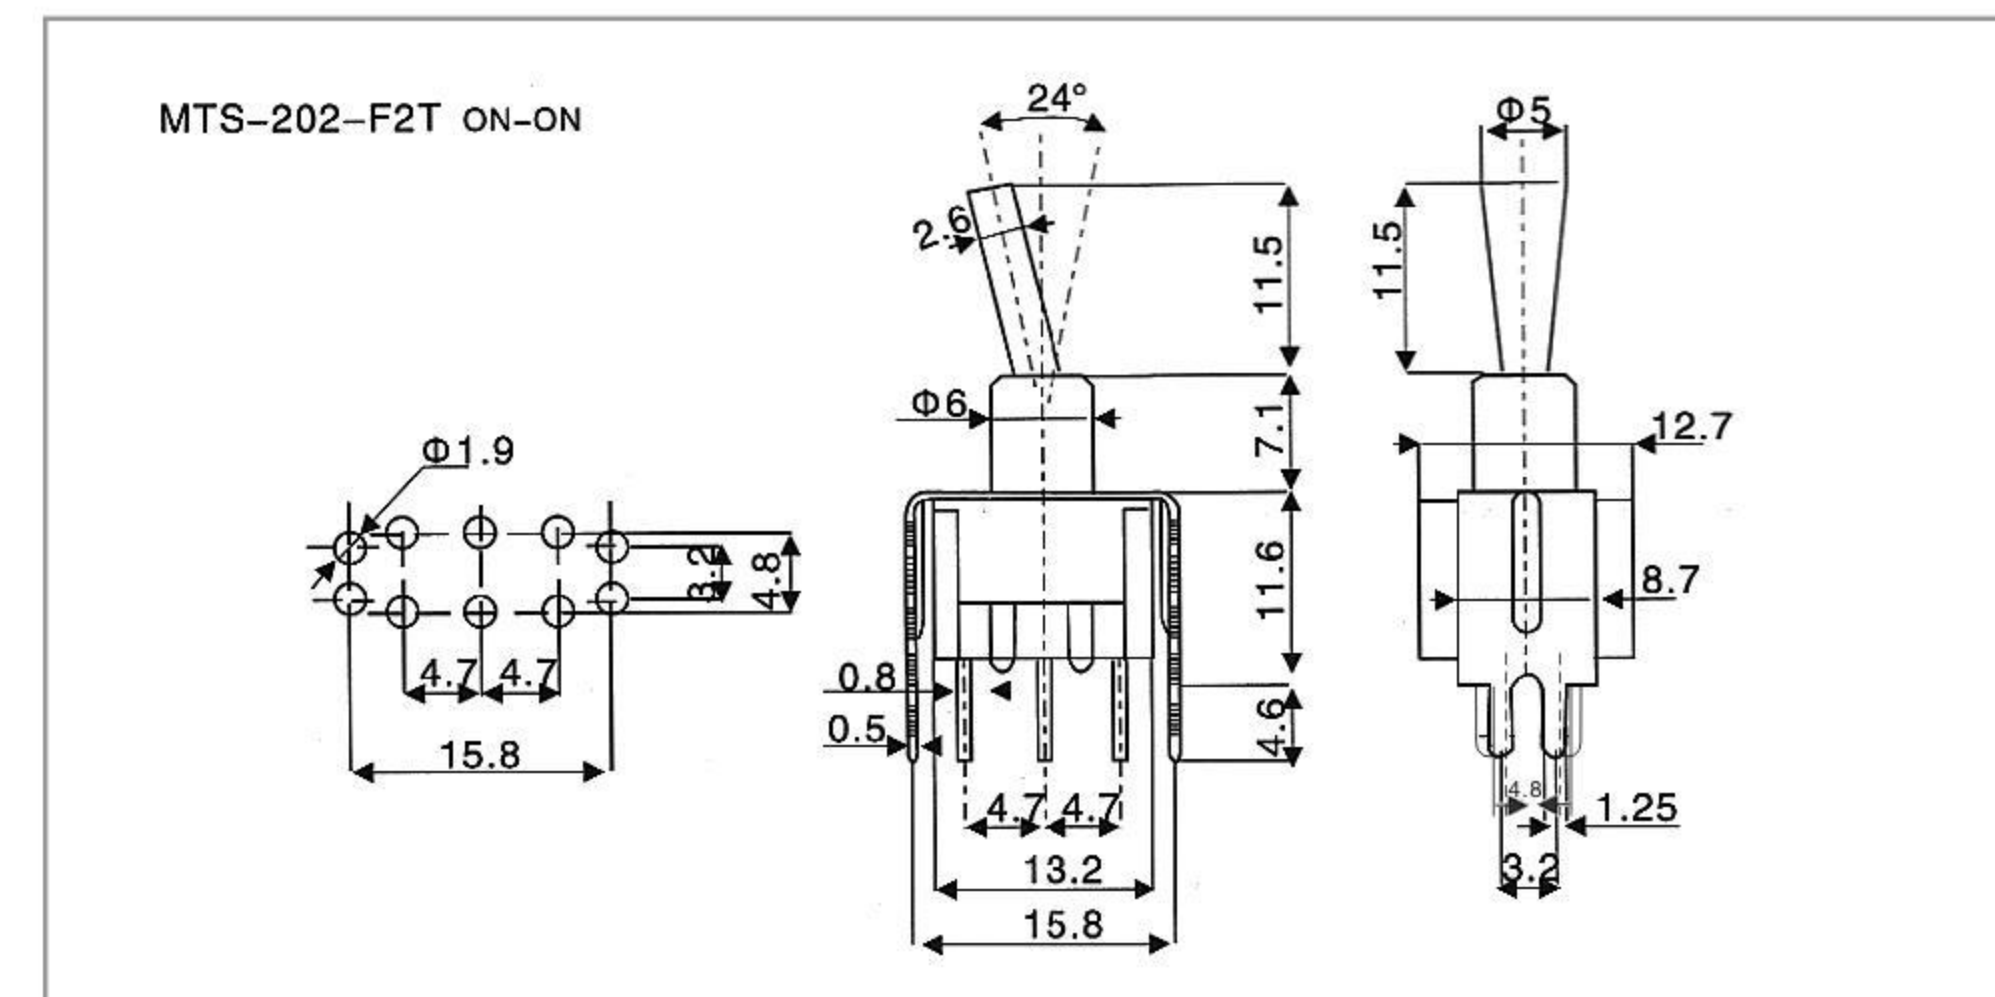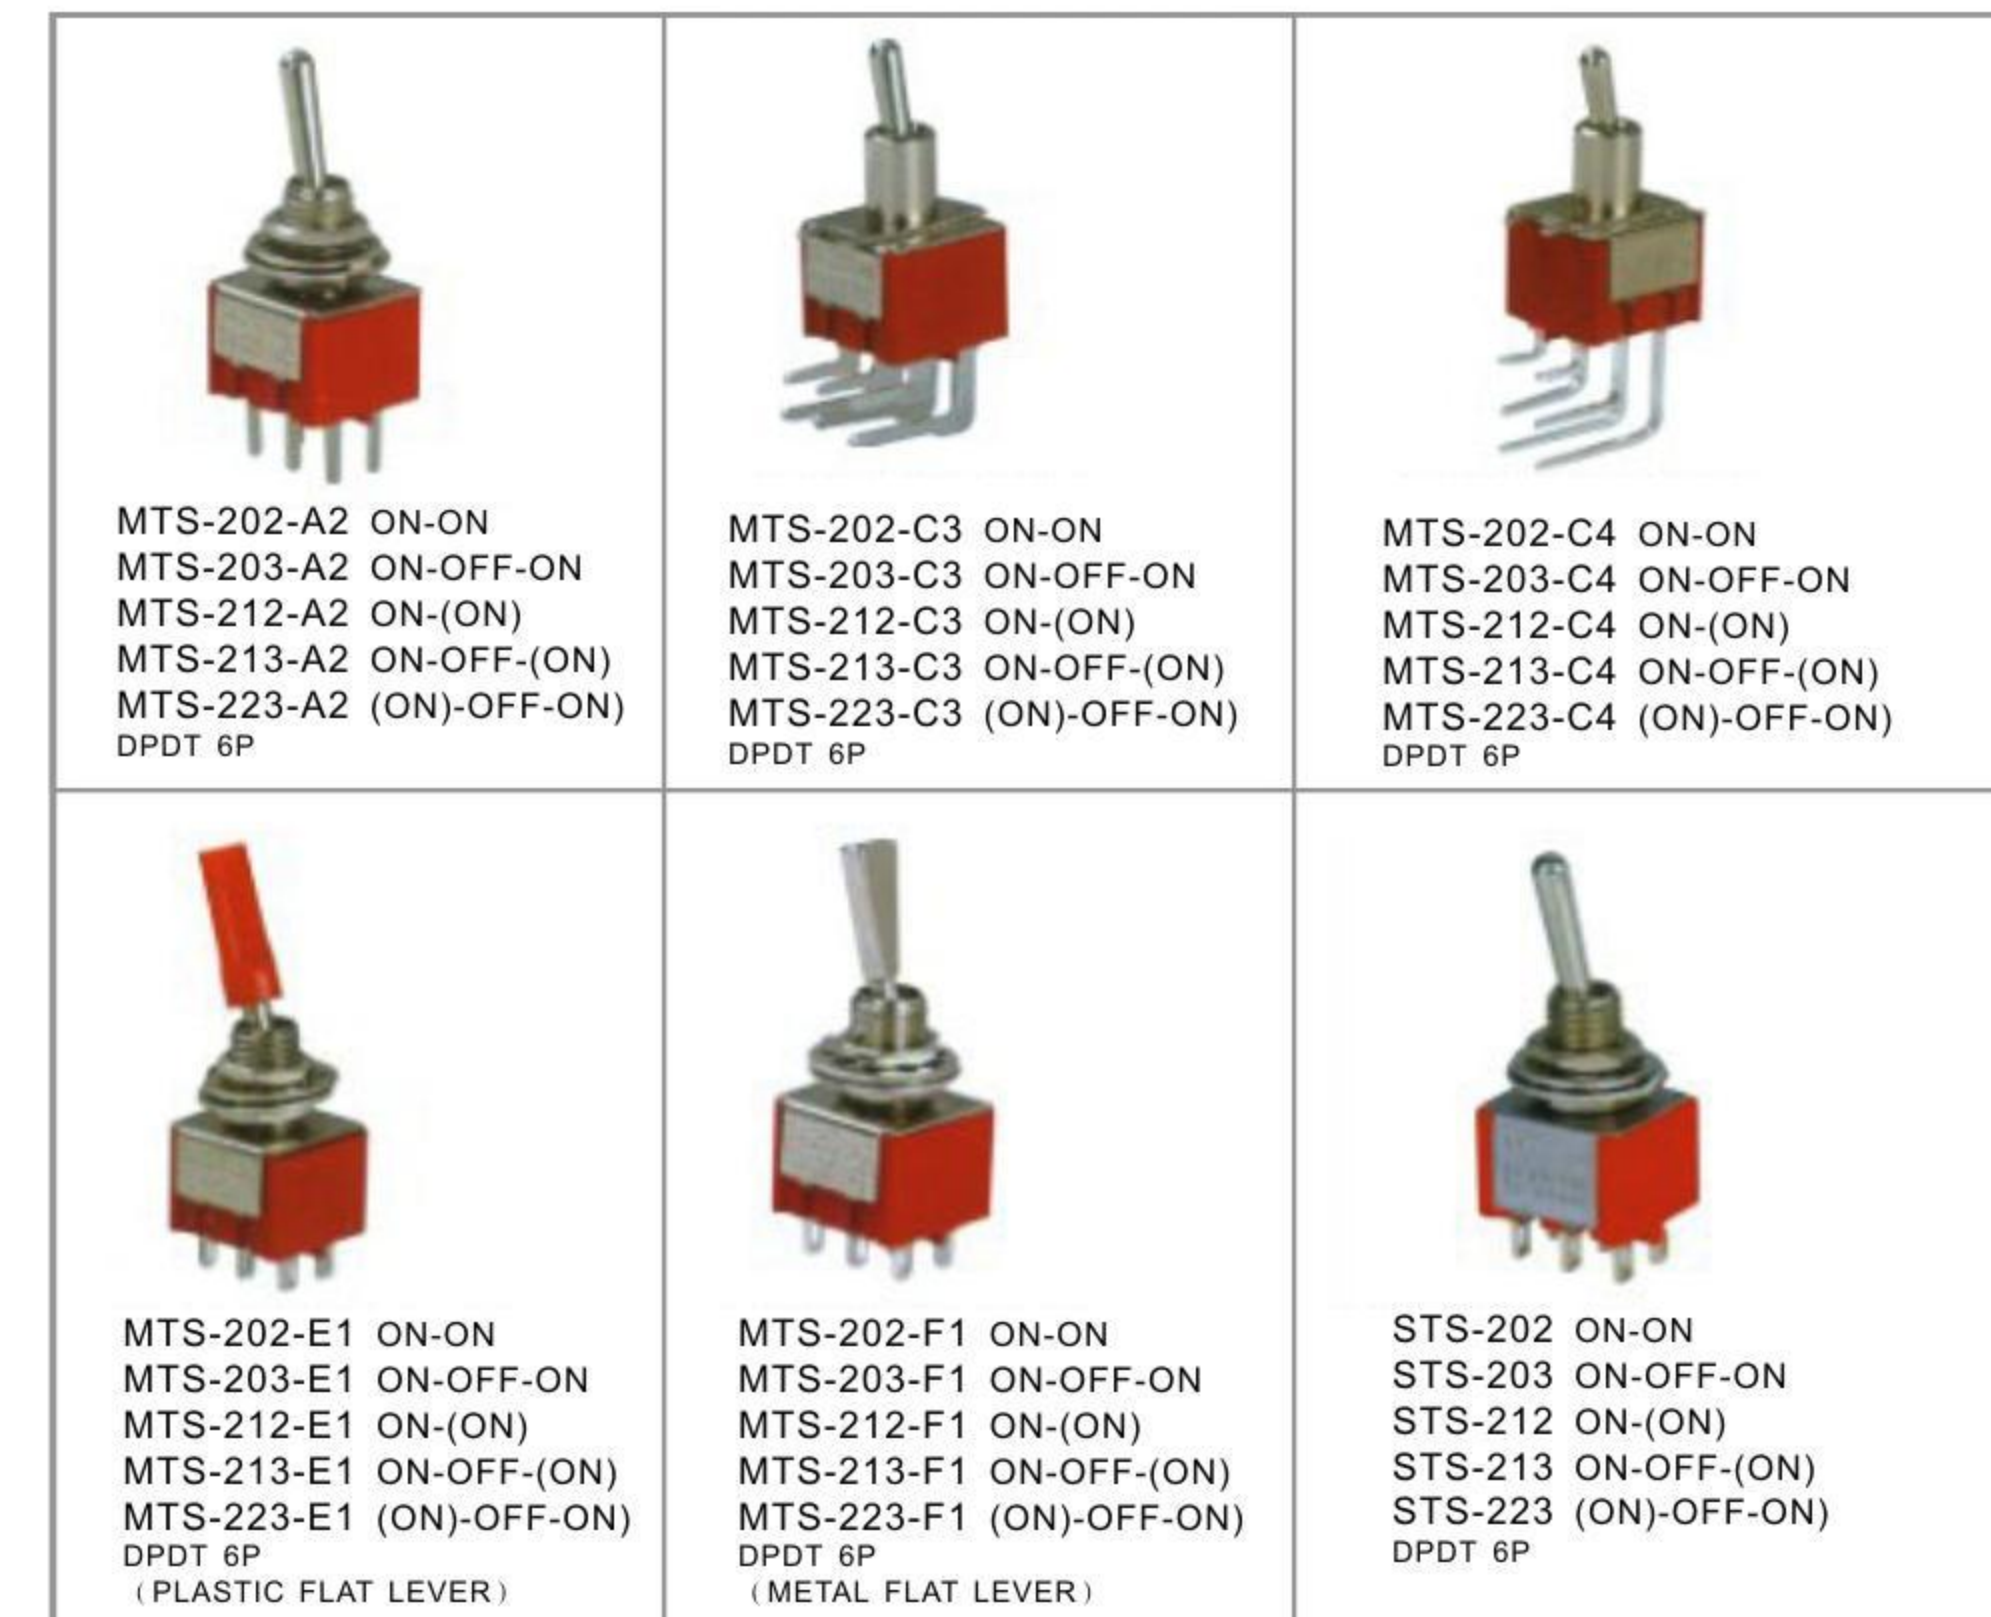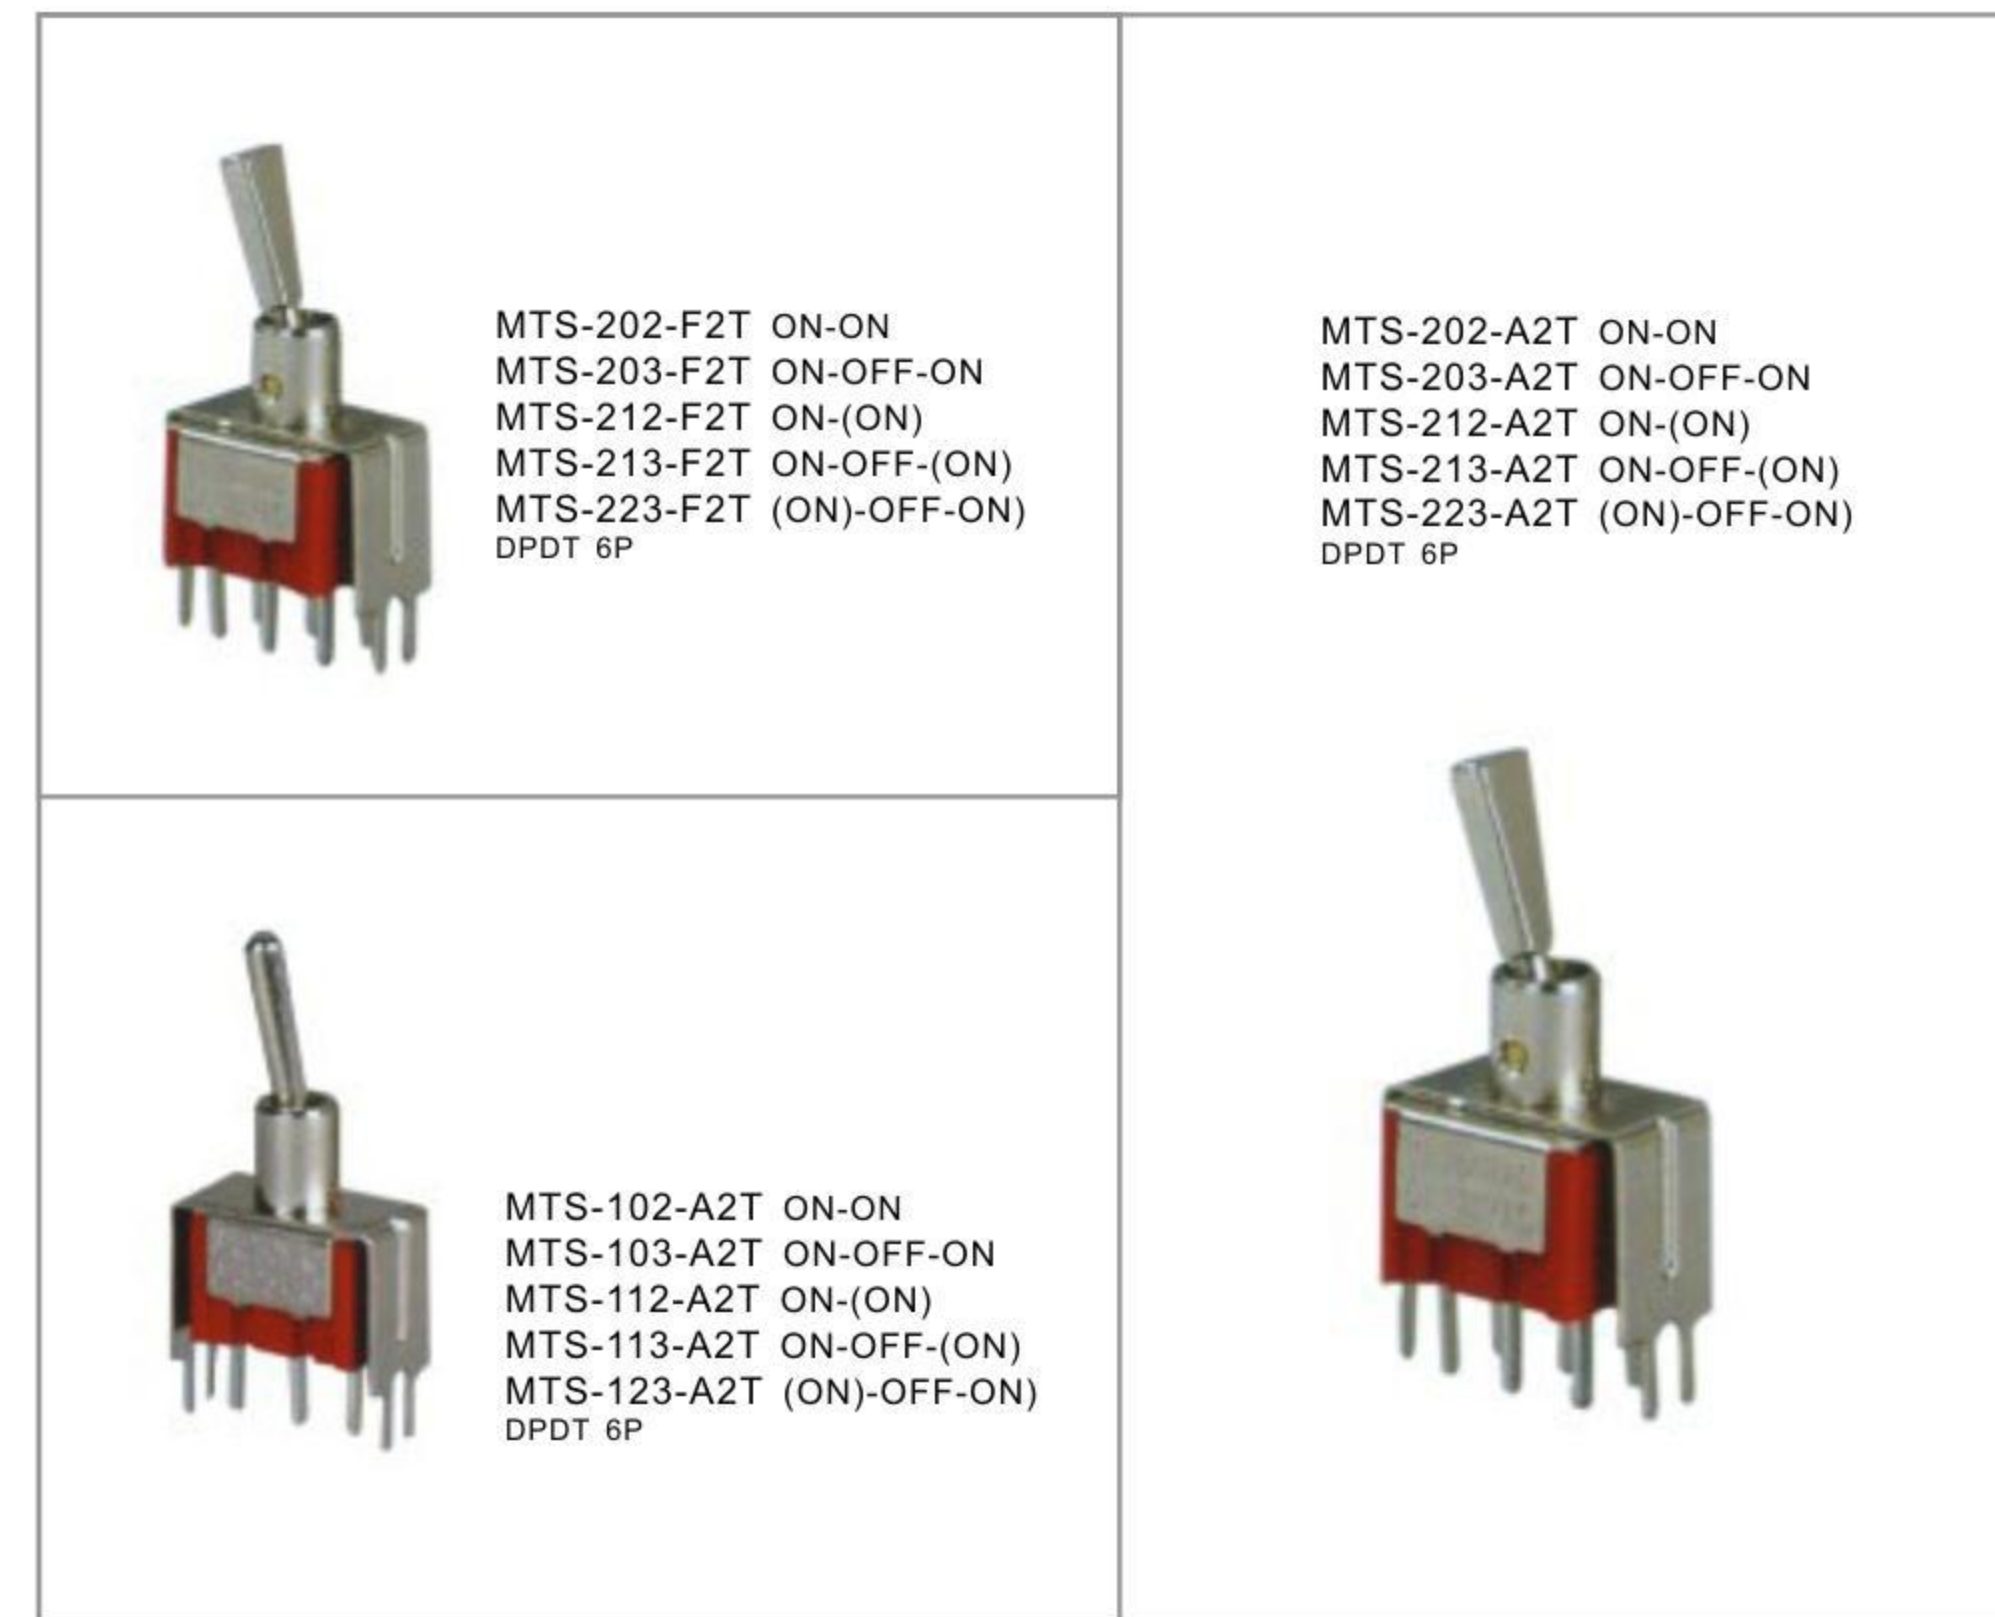

型号说明 Ordering Information

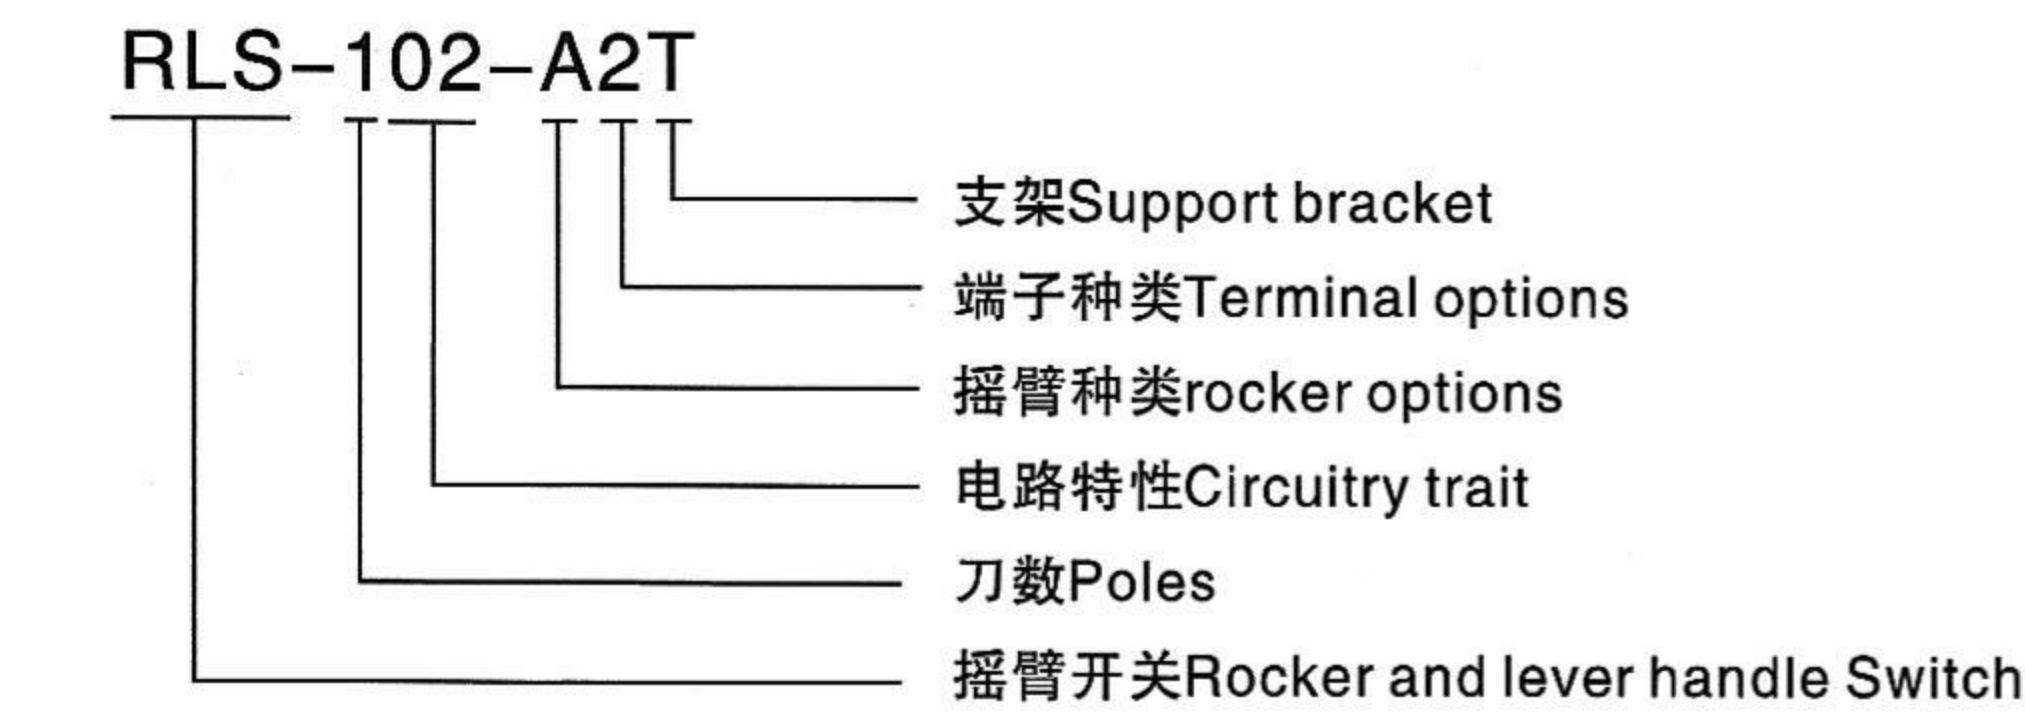


电路特征 Circuitry trait






02	ON	-	ON
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

() 回弹指示 Indicates Momentary

端子种类 T ermin al options

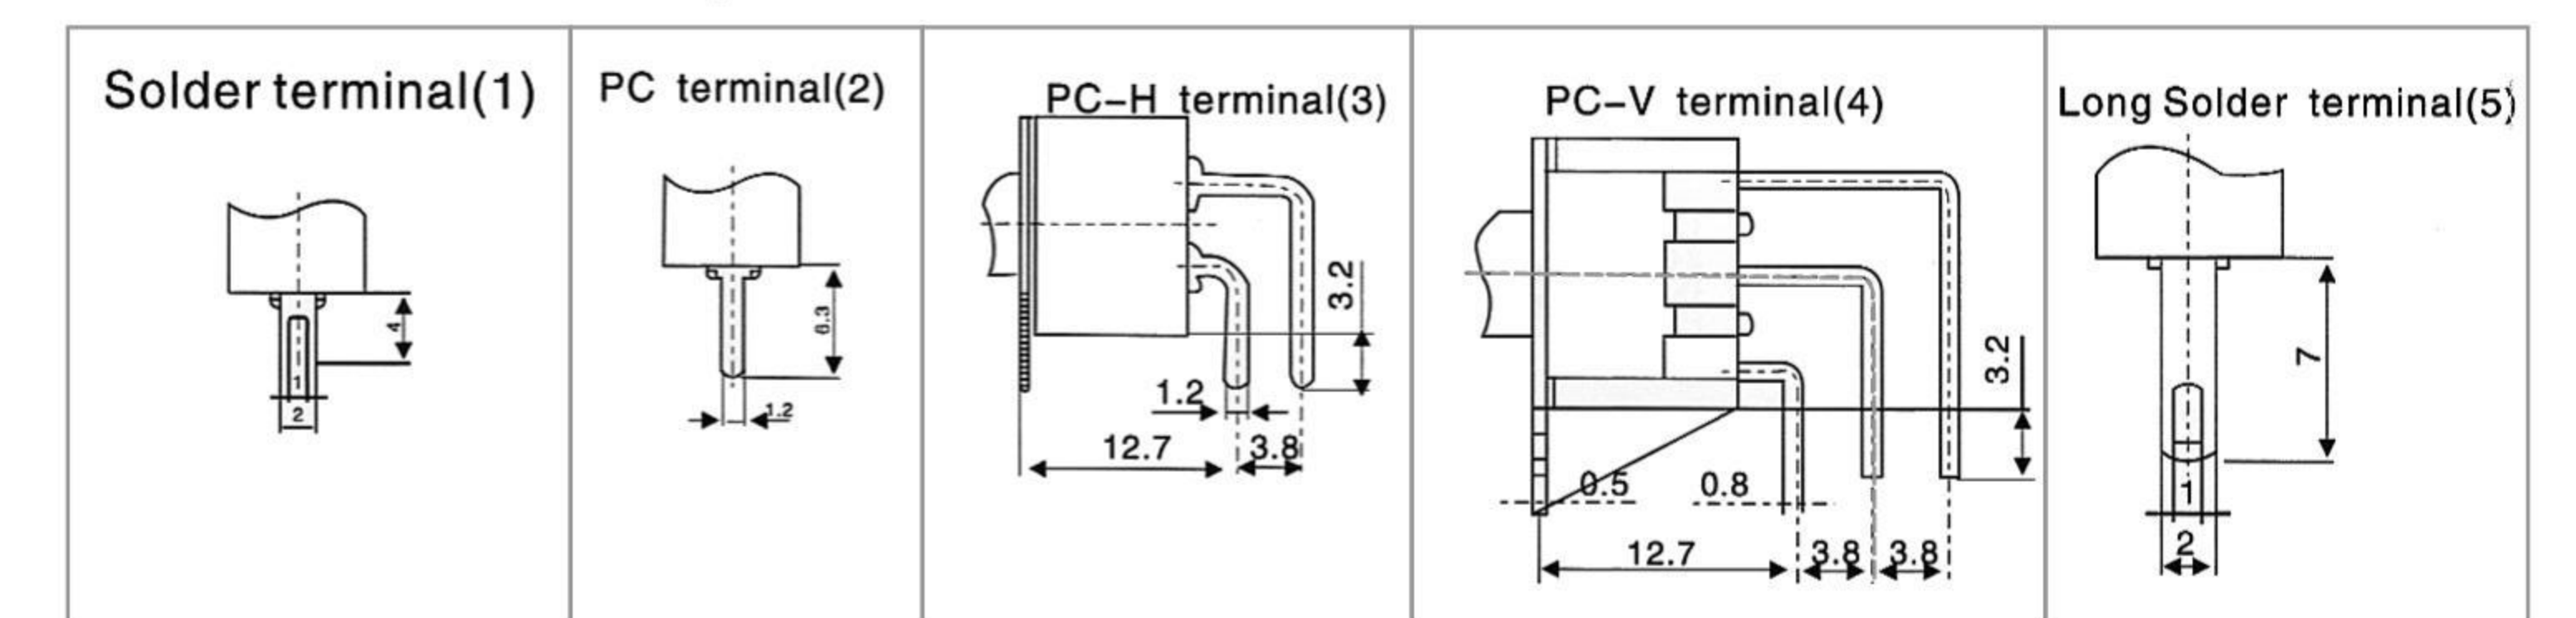

摇臂种类 Rocker options

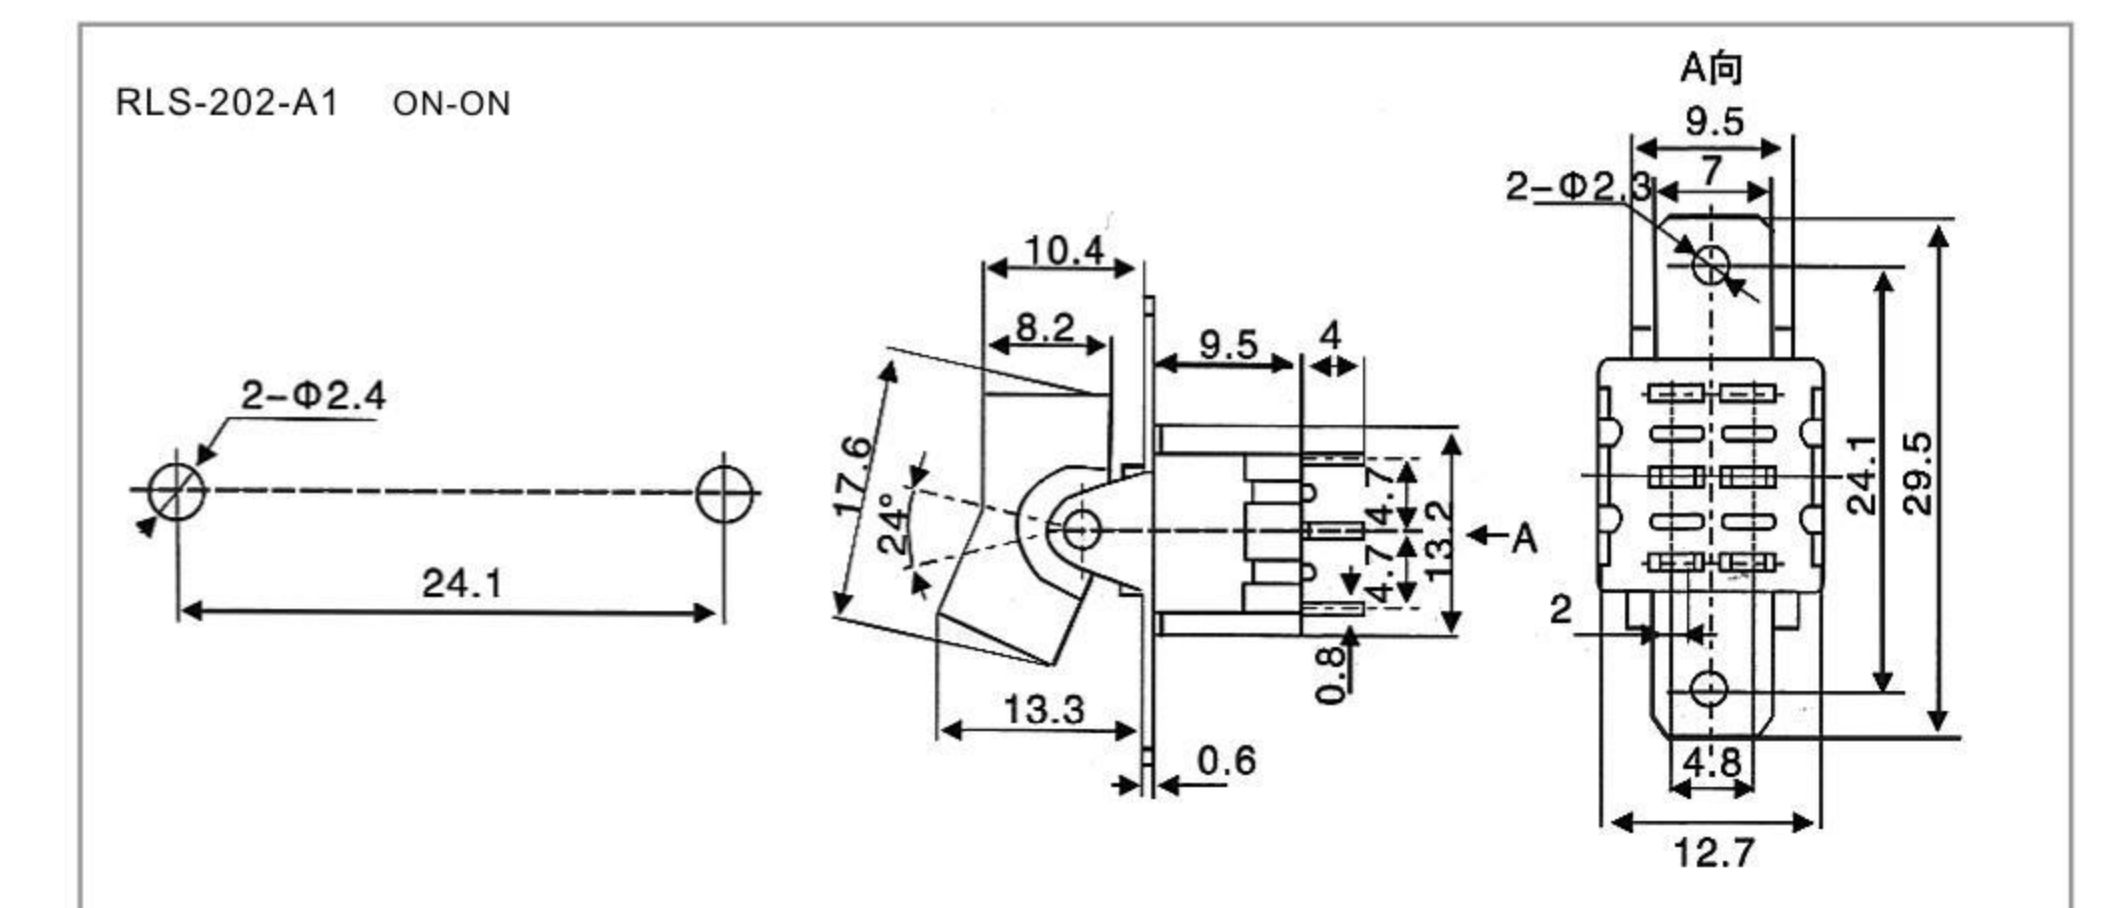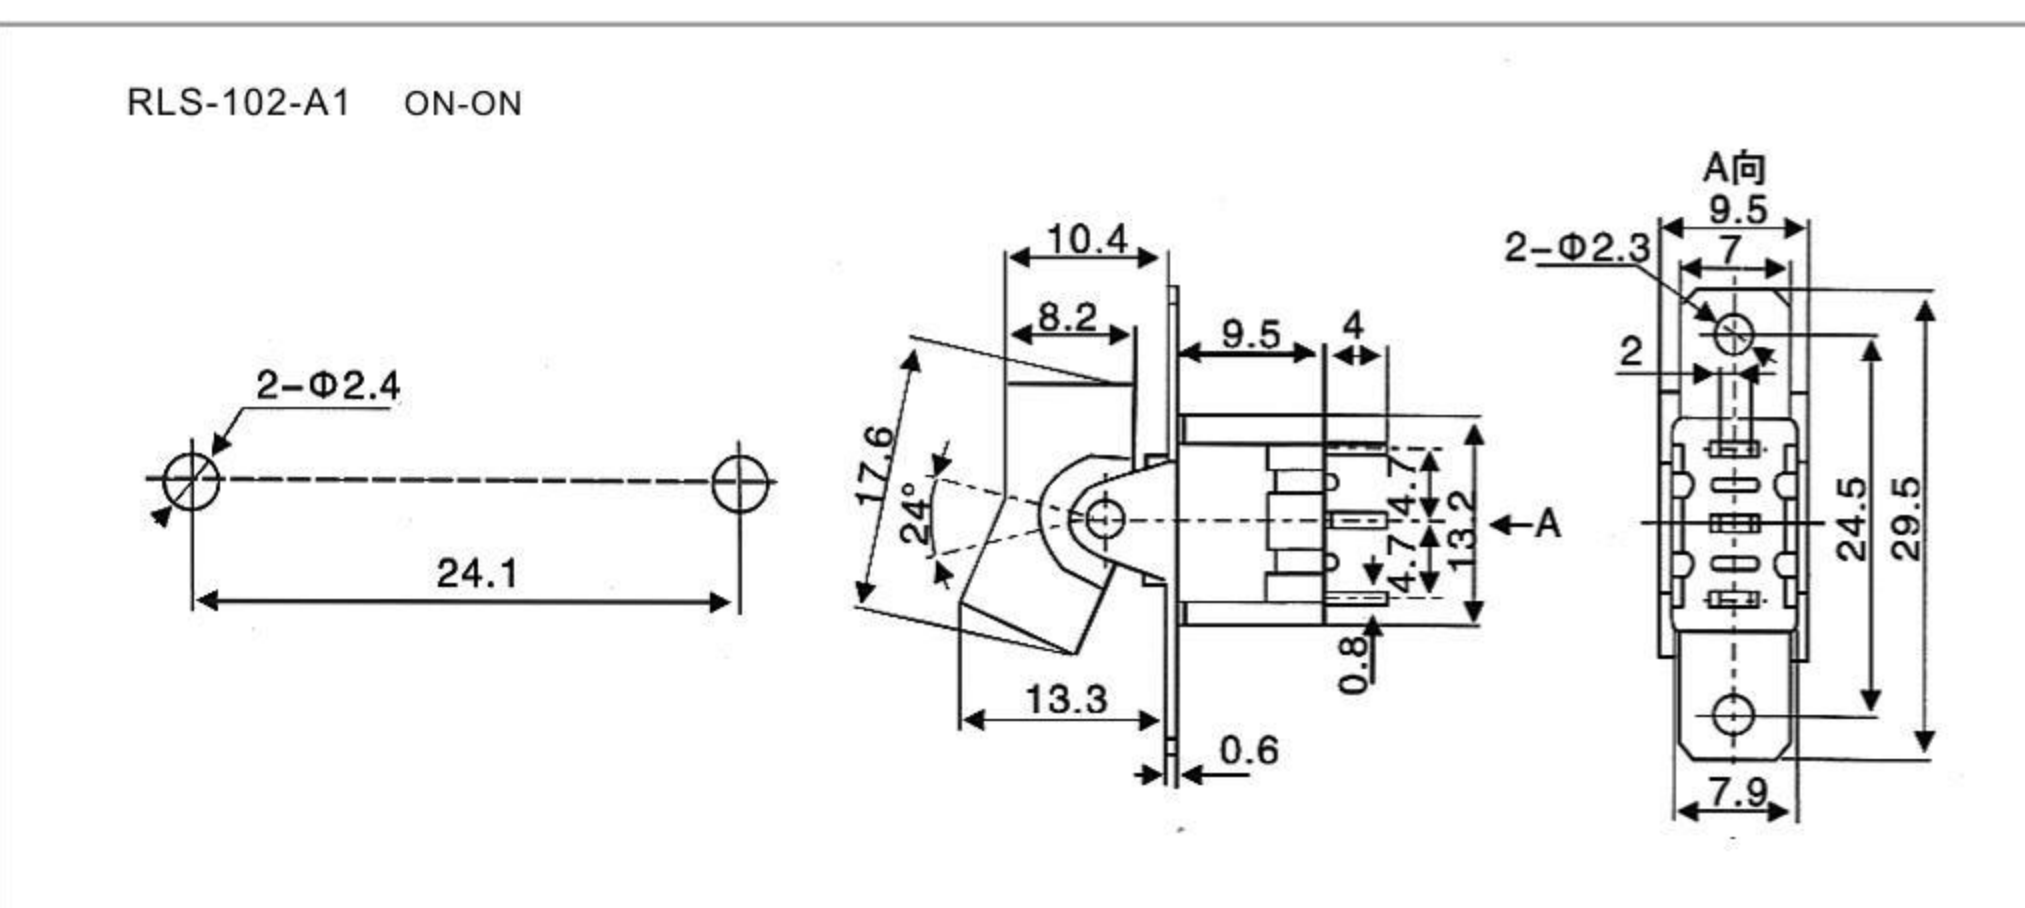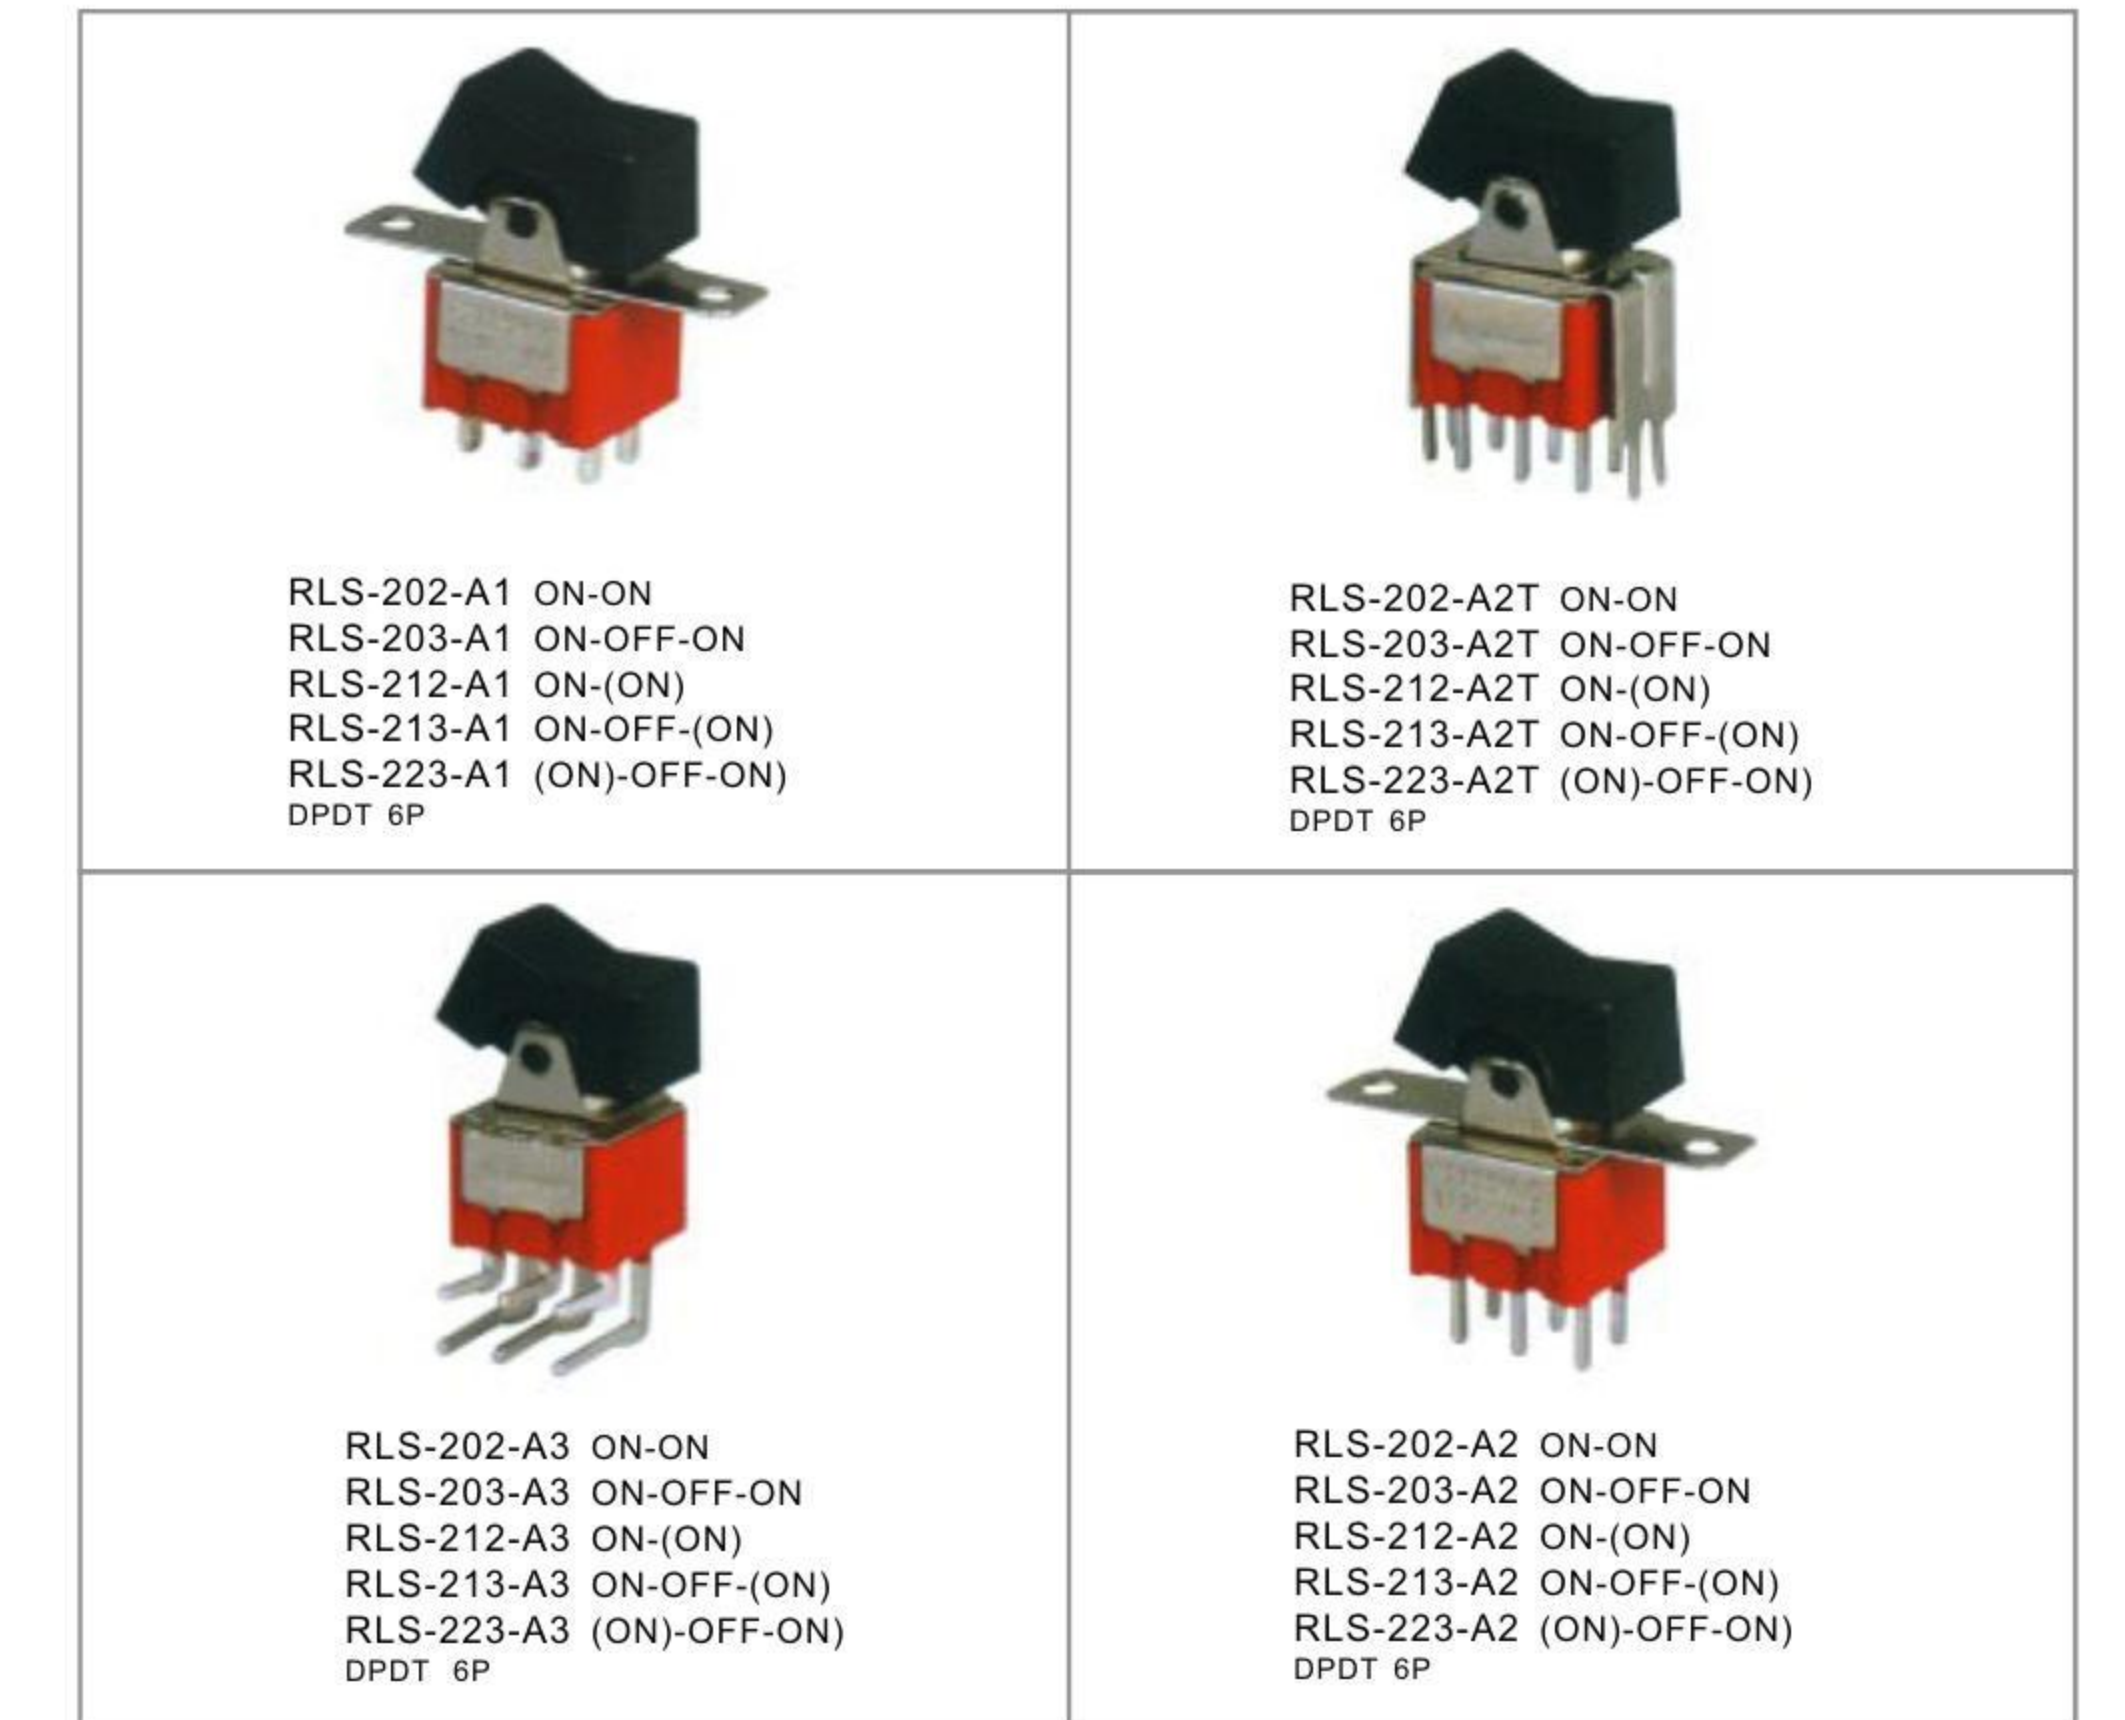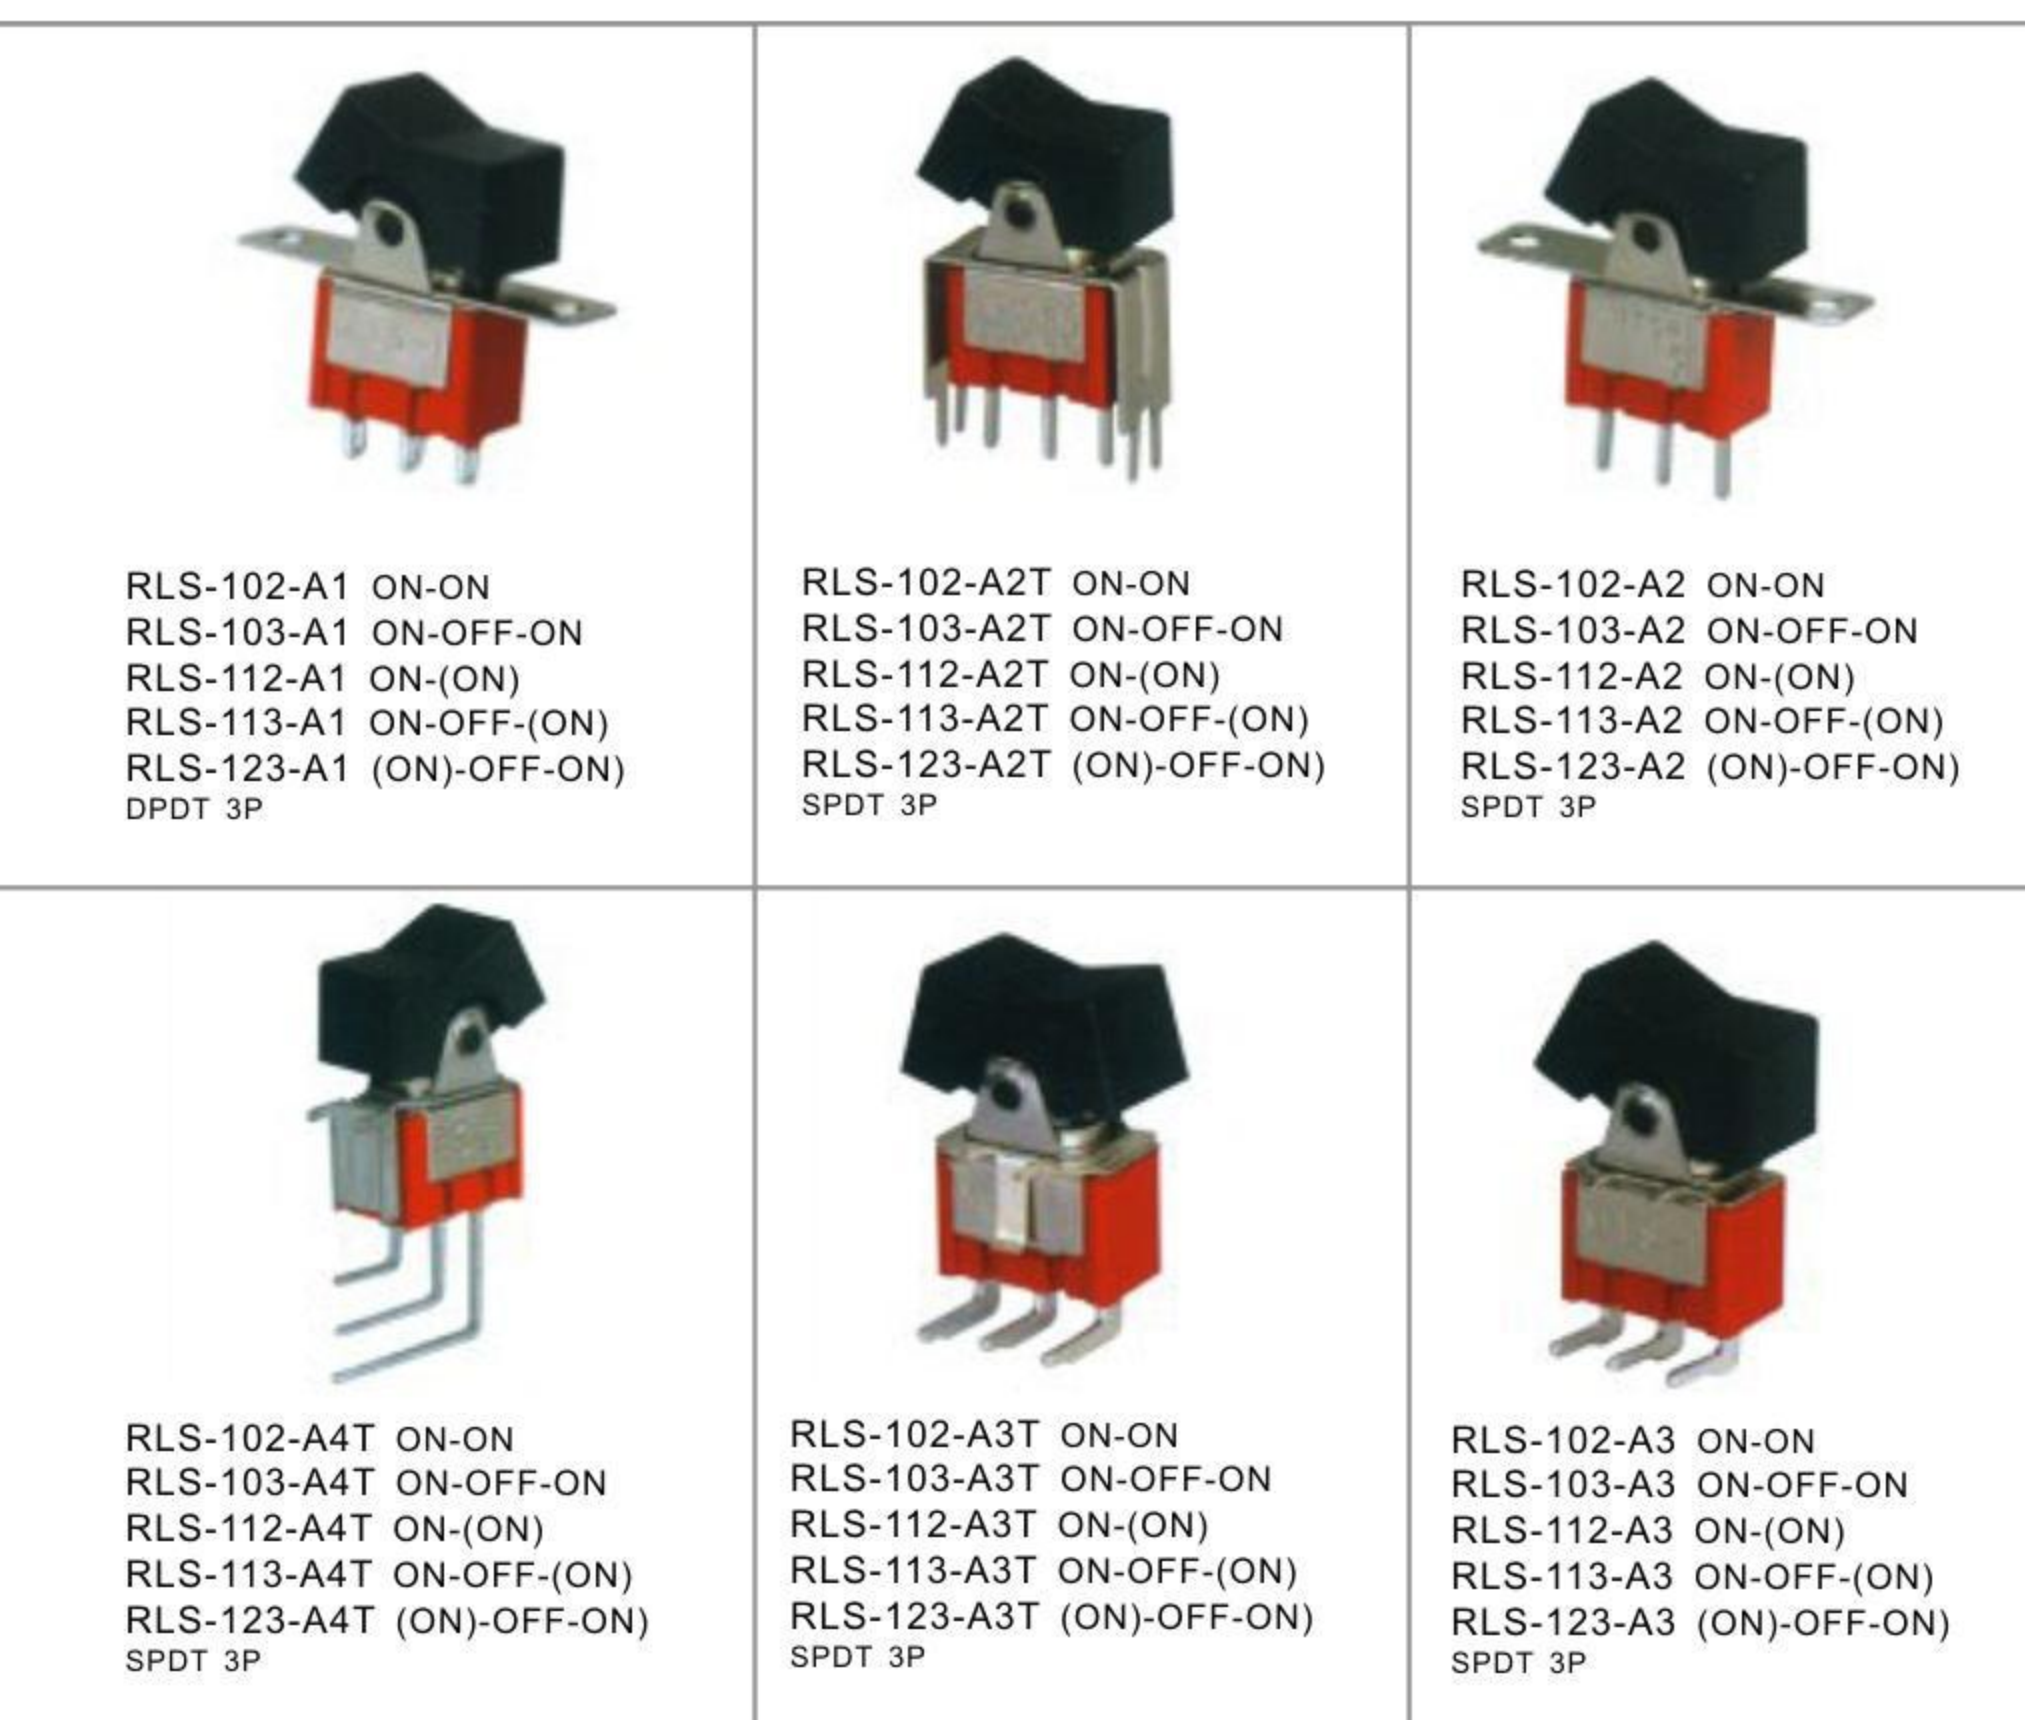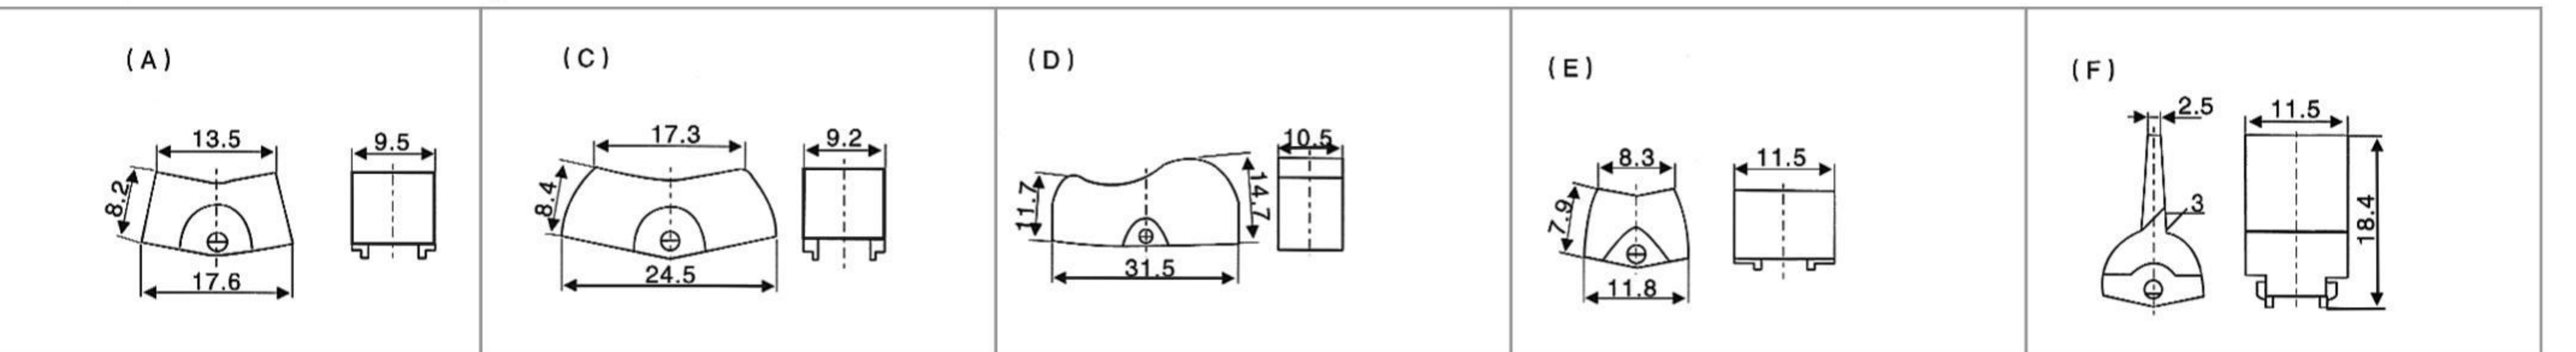

技术特性 Specification

- 规格 Rating: 6A 125VAC; 3A 250VAC
- 接触电阻 Contact Resistance: 20m Ω max
- 绝缘电阻 Insulation Resistance: 500VDC 1000M Ω min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature: -25℃~+85℃
- 电气寿命 Electrical Life: 10,000 Cycles

中型扭子開關
MEDIUM TOGGLE SWITCH



型号说明 Ordering Information

KN3(C)-102APE-B2



技术特性 Specification


- 规格 Rating: () 10A 125VAC; 6A 250VAC
(A) 15A 125VAC; 10A 250VAC
(AA) 20A 125VAC; 15A 250VAC
- 接触电阻 Contact Resistance: 50m Ω max
- 绝缘电阻 Insulation Resistance: 500VDC 1000M Ω min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature: -25℃~+85℃
- 电气寿命 Electrical Life: 10,000 Cycles

电路特性 Circuitry trait


01	ON	-	OFF
02	ON	-	ON
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

() 回弹指示 Indicates Momentary


端子种类 Terminal Terminal

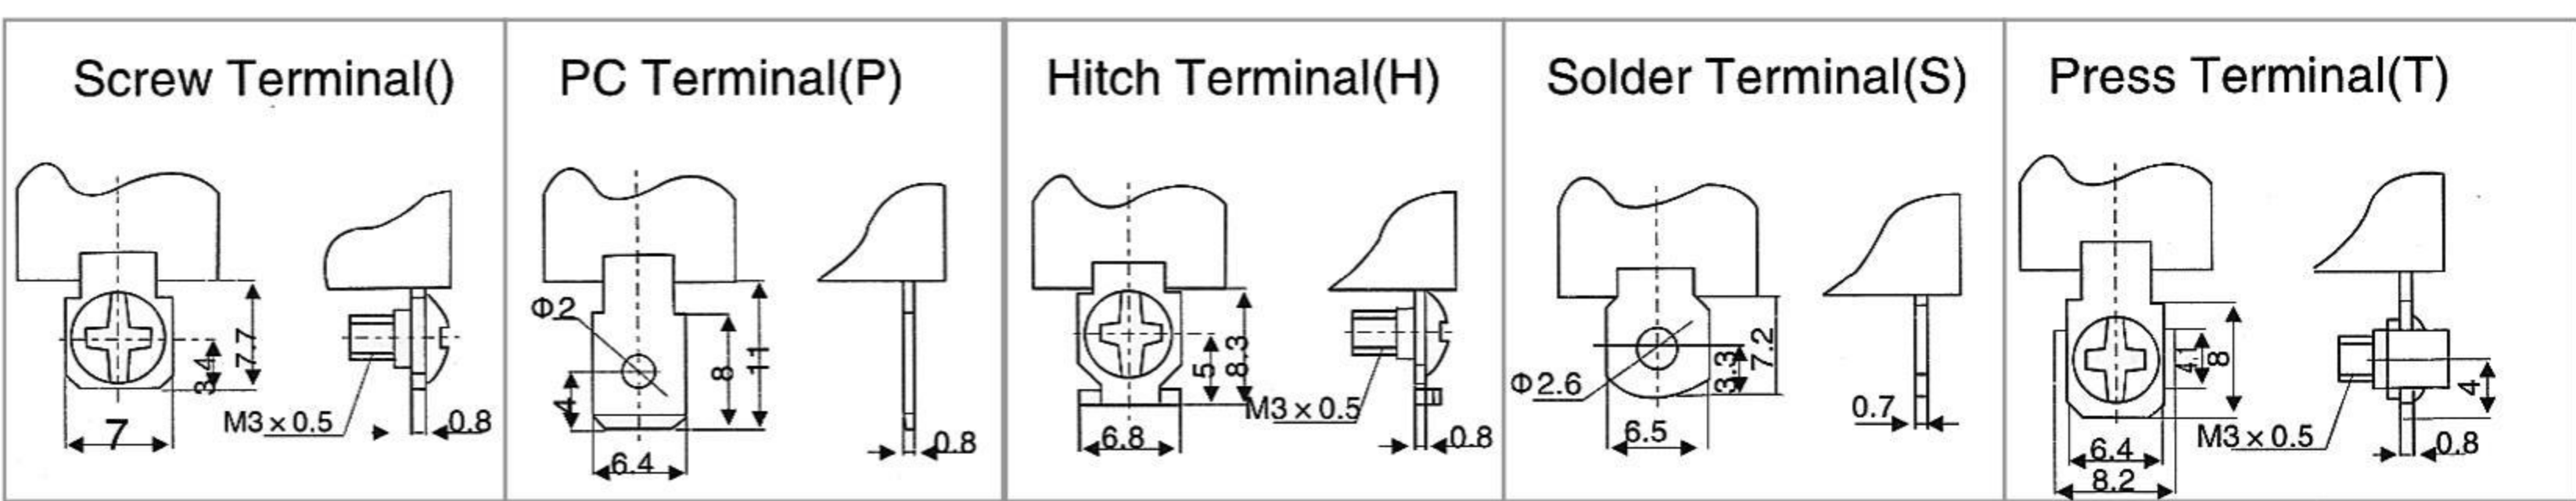


手柄种类 Handle options

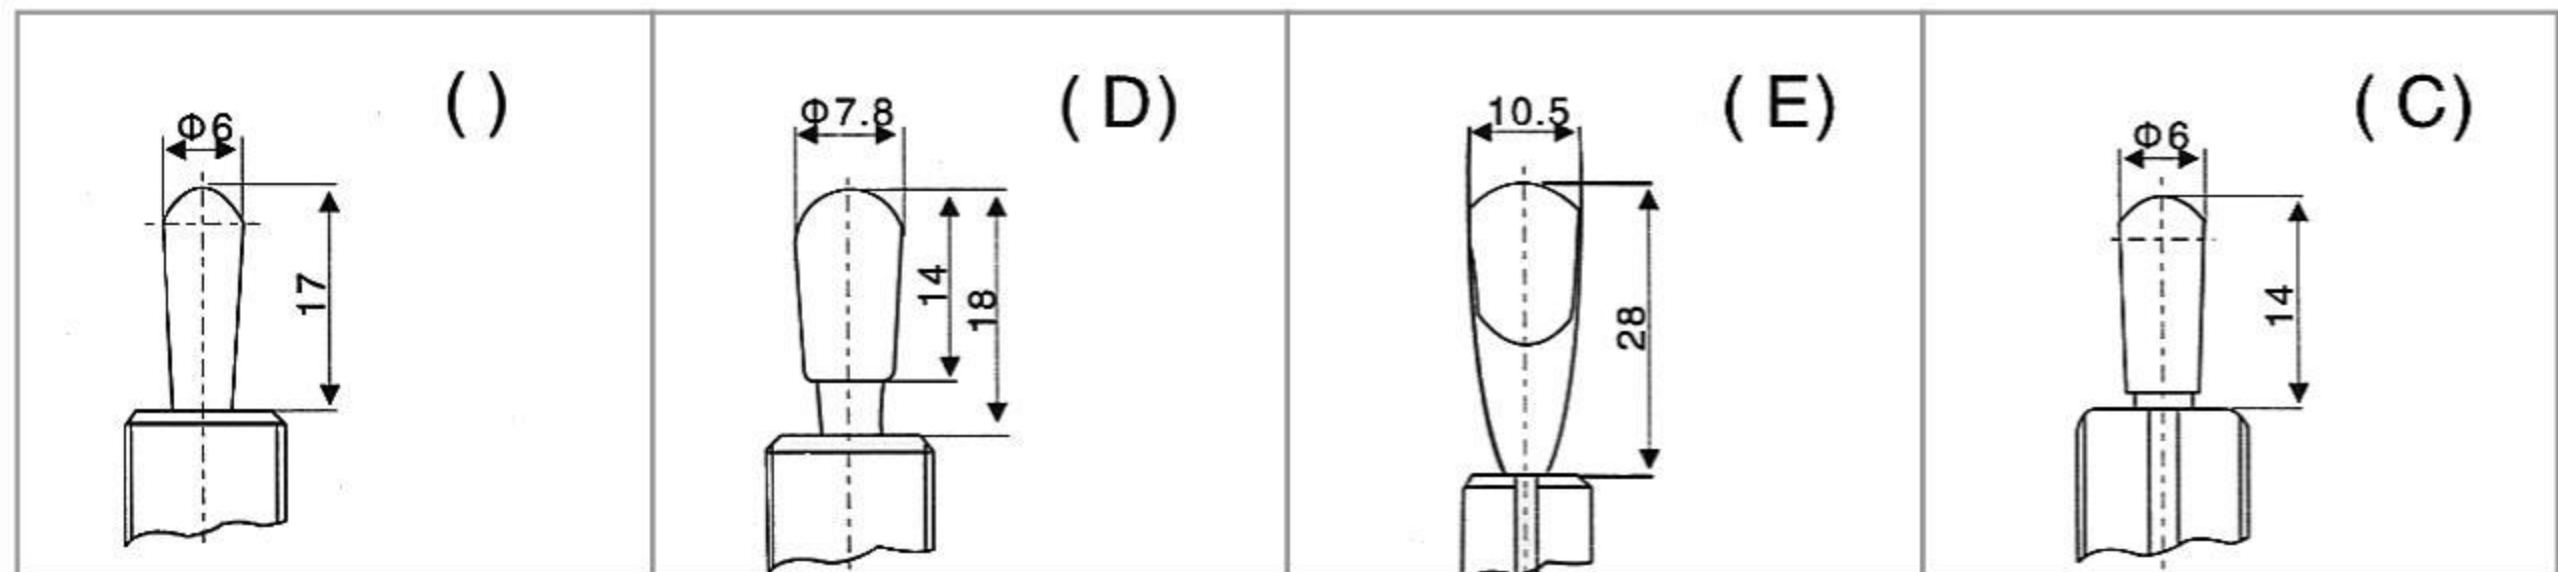

特殊基座 Special base


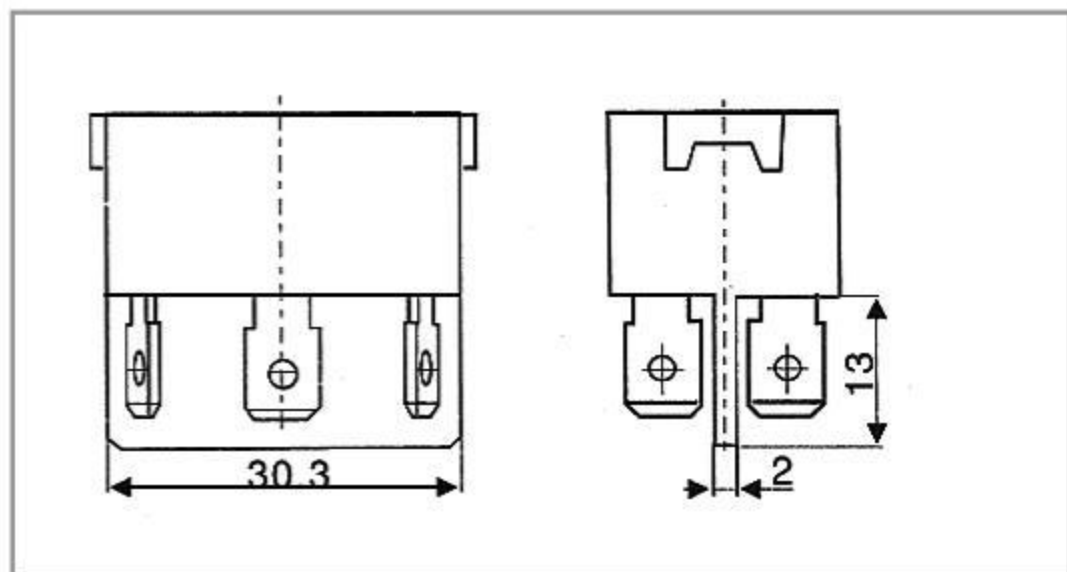


铭牌标记 Nameplate mark 基座颜色 Base color

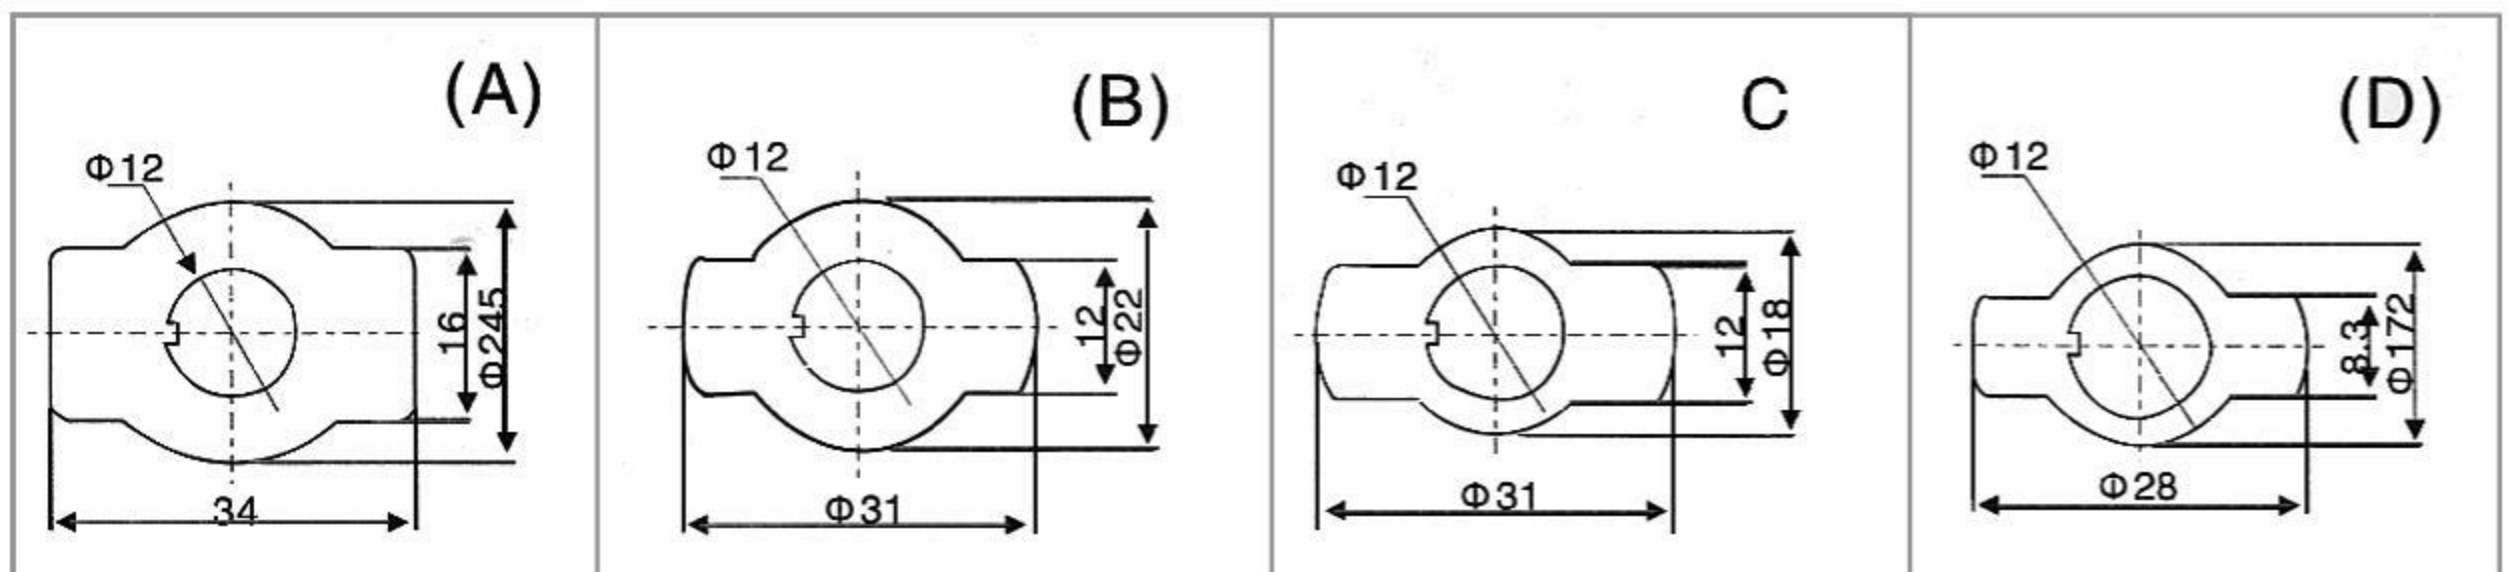

1 ON - OFF	黑 Black
2 ON - ON	棕 Brown
3 ON-OFF-ON	红 Red

防水帽 Water proof cap

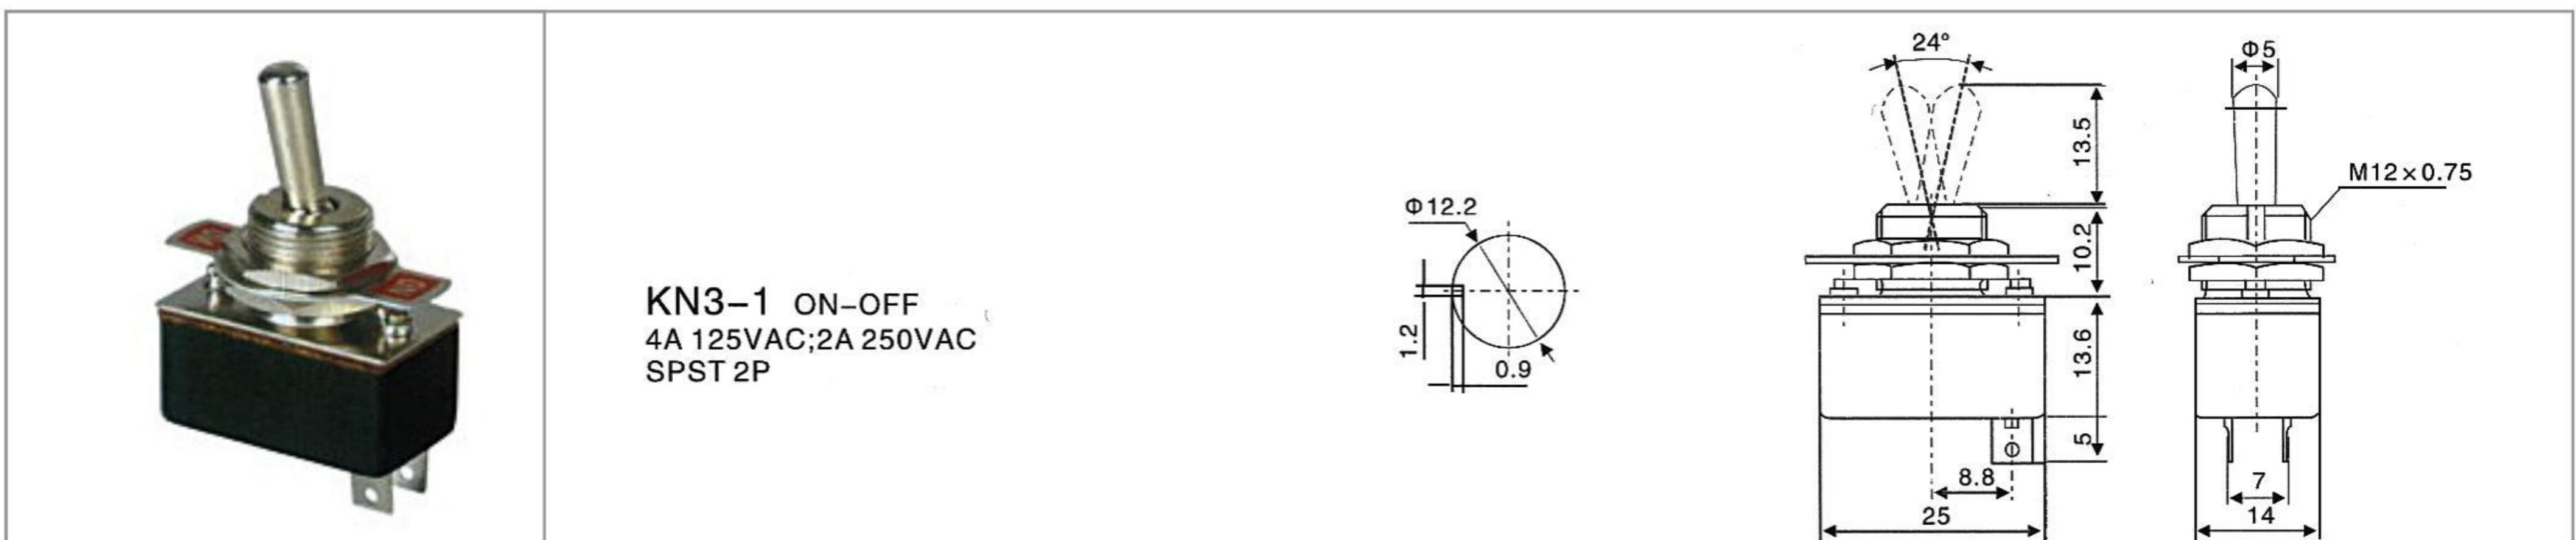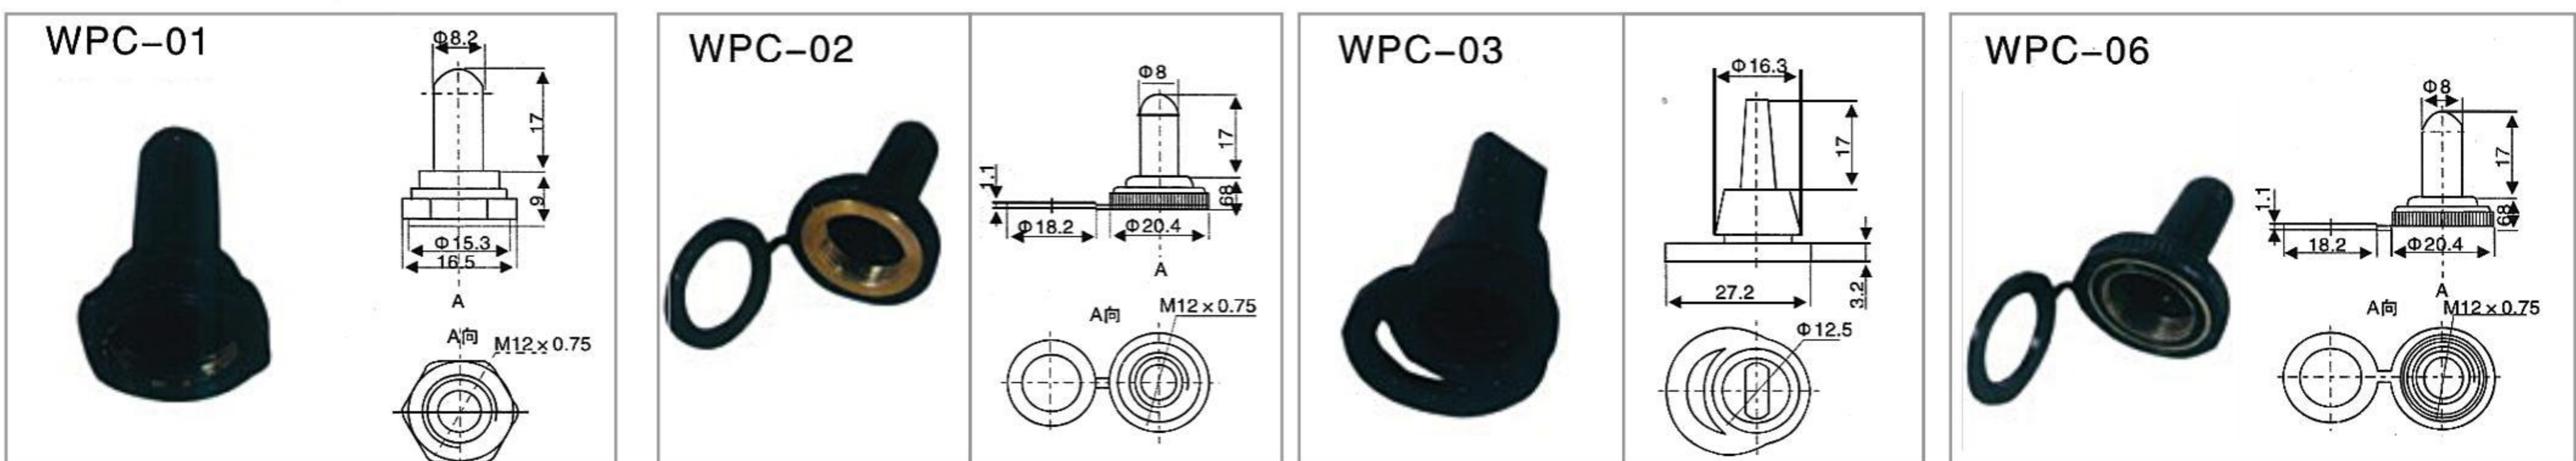

中型扭子開關
MEDIUM TOGGLE SWITCH

	KN3(C)-102A ON-ON KN3(C)-103A ON-OFF-ON KN3(C)-112A ON-(ON) KN3(C)-113A ON-OFF-(ON) KN3(C)-123A (ON)-OFF-(ON) SPDT 3P	
	KN3(A)-202P ON-ON KN3(A)-203P ON-OFF-ON KN3(A)-212P ON-(ON) KN3(A)-213P ON-OFF-(ON) KN3(A)-223P (ON)-OFF-(ON)	
	KN3(C)-101A ON-OFF SPST 2P	
	KN3(C)-101P ON-OFF SPST 2P	
	KN3(C)-202A ON-ON KN3(C)-203A ON-OFF-ON KN3(C)-212A ON-(ON) KN3(C)-213A ON-OFF-(ON) KN3(C)-223A (ON)-OFF-(ON) DPDT 6P	
	KN3(C)-102P ON-ON KN3(C)-103P ON-OFF-ON KN3(C)-112P ON-(ON) KN3(C)-113P ON-OFF-(ON) KN3(C)-123P (ON)-OFF-(ON) SPDT 3P	
	KN3(C)-201P ON-OFF DPST 4P	
	KN3(C)-202P ON-ON KN3(C)-203P ON-OFF-ON KN3(C)-212P ON-(ON) KN3(C)-213P ON-OFF-(ON) KN3(C)-223P (ON)-OFF-(ON) DPDT 6P	